

SOLUÇÕES PROFISSIONAIS
PROFESSIONAL SOLUTIONS

FITAS E PERFIS

STRIPS AND PROFILES

brilumen[®]
Lighting emotions!



www.brilumen.com



MADE IN PORTUGAL

A reprodução deste catálogo inteira ou parcialmente, bem como a utilização de texto ou imagens sem autorização, são expressamente proibidas.

It's expressly prohibited the total or part reproduction of this catalogue, as well as the use of text or images without previous permission.

PT

VISÃO

- A marca de iluminação profissional de elevada reputação.

MISSÃO

- Proporcionar uma oferta de produtos de iluminação de elevada qualidade e de última tecnologia.
- Através da procura permanente da excelência no serviço ao cliente, constituir uma opção forte e competitiva de especialistas em iluminação profissional, para profissionais.

VALORES

- Integridade, honestidade, verdade e profissionalismo;
- Respeitar o relacionamento com o cliente. Incentivar e manter parcerias de longo prazo;
- Proporcionar ganhos de valor ao cliente e à empresa;
- Criar bom ambiente no local de trabalho. Valorização e respeito pelas pessoas;
- Trabalho em equipa de forma consistente e focada;

EN

OUR VISION

- A high reputation professional lighting brand.

OUR MISSION

- Provide the latest technology in high quality lighting products.
- Always aiming for excellence in client service, build up a strong and competitive option of professional lighting specialists for professionals.

OUR VALUES

- Integrity, honesty, truth and professionalism;
- Respect the relationship with the customer. Encourage and maintain long term partnerships;
- Provide value gains to the customer and business;
- Provide a healthy working environment. Value and respect people;
- Focused and solid team working;
- Innovation and quality.

LED NEON

LED NEON



LED NEON



2005-105 P.14

IP67 | 24V | 4,8W/m



2005-104 P.15

IP67 | 24V | 5W/m



2005-106 P.16

IP67 | 24V | 5W/m



2005-101 P.17

IP67 | 24V | 10W/m



2005-102 P.18

IP67 | 24V | 10W/m



2005-103 P.19

IP67 | 24V | 10W/m



2005-107 P.20

IP67 | 24V | 10W/m



2005-100 P.21

IP67 | 24V | 15W/m



FITAS LED COB | COB LED STRIPS



2002-160 P.24

IP20 | 24V | 6,5W/m



2002-158 P.25

IP20 | 24V | 11W/m



2002-171 P.26

IP20 | 24V | 11W/m



2002-159 P.27

IP20 | 24V | 12W/m



2002-172 P.28

IP65 | 24V | 11W/m



2002-162 P.29

IP67 | 24V | 6,5W/m



2002-161 P.30


IP67 | 24V | 12W/m



2002-173 P.31

IP65 | 230V | 9W/m

FITAS DE LED | LED STRIPS

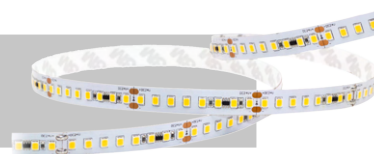

2002-163 P.32

IP20 | 24V | 9,6W/m



2002-167 P.33

IP20 | 24V | 10W/m



2002-170 P.34

IP20 | 24V | 10,5W/m



2002-156 P.35

IP20 | 24V | 11W/m



2002-135 P.36

IP20 | 24V | 14,4W/m



2002-165 P.37

IP20 | 24V | 14,4W/m



2002-166 P.38

IP20 | 24V | 14,4W/m



2002-164 P.39

IP20 | 24V | 21,6W/m



2002-168 P.40

IP65 | 24V | 10W/m



2002-142 P.41

IP65 | 24V | 14,4W/m



2002-1116 P.42

IP65 | 24V | 14,4W/m



2002-169 P.43

IP67 | 24V | 10W/m



2002-174 P.44

IP65 | 230V | 9W/m

PERFIS DE ALUMÍNIO

ALUMINIUM PROFILES

SALIENTE | SURFACE



LP02 P.48

max. 12mm

■ 2m G810-6022
□ 2m G810-6023
■ 2m G810-6024



LP06 P.50

max. 12mm


■ 2m G810-6062



NP04 P.52

max. 24mm

■ 2m G820-1012
□ 2m G820-1013
■ 2m G820-1014



NP06V2 P.54

max. 24mm


■ 2m G830-1017
□ 2m G830-1018
■ 2m G830-1019



NP08 P.56

max. 16mm

■ 2m G810-1020
□ 2m G810-1021
■ 2m G810-1022



NP17V2 P.58

max. 12/30mm

■ 2m G812-3363
□ 2m G812-3365
■ 2m G812-3364



NP20V2 P.60

max. 20mm

■ 2m G810-2210



OP13 P.62

max. 15mm

■ 2m G810-1030



OP14 P.64

max. 12mm

■ 2m G810-5050



OP16 P.66

max. 8mm

■ 2m G810-1050
■ 2m G810-1051



OP17 P.68

max. 11mm

■ 2m G810-3082



OP18 P.70

max. 6mm

■ 2m G810-1060
■ 2m G810-1062




TRIX P.72

max. 12mm

■ 2m 8010-2002

ENCASTRAR | RECESSED



IP03V2 P.76

max. 13mm

■ 2m 8010-2001

LP03 P.78

max. 12mm

■ 2m G810-6032

□ 2m G810-6034

■ 2m G810-6033

LP08 P.80

max. 12mm

■ 2m G810-6082

□ 2m G810-6088

■ 2m G810-6089

NP05 P.82

max. 22mm

■ 2m G820-6012

□ 2m G820-6014

■ 2m G820-6013

NP07V2 P.84

max. 20mm

■ 2m G830-5015

□ 2m G830-5016

■ 2m G830-5017

NP21 P.86

max. 20mm

■ 2m G810-2211

MONTAGEM | MOUNTING



LP10 P.90

max. 12mm

■ 2m G810-7012

□ 2m G810-7013

■ 2m G810-7014

LP10.1 P.92

max. 12mm

■ 2m G810-1080

CANTO | CORNER



LN10 P.96

max. 10mm

■ 2m G812-1400

NP10 P.98

max. 13mm

■ 2m G860-0043

NP19V3 P.100

max. 20mm

■ 2m G812-3359

OP05 P.102

max. 12mm

■ 2m G812-3100

OP23V2 P.104

max. 11mm

■ 2m G810-4060

□ 2m G810-4062

■ 2m G810-4064

PW01 P.106

max. 18mm

□ 2m G810-2085

■ 2m G810-2084

PERFIS DE ALUMÍNIO

ALUMINIUM PROFILES

INDIRETO | INDIRECT


AV02 P.110

max. 16mm

■ 2m G812-3154
□ 2m G812-3156
■ 2m G812-3155


AV03 P.112


max. 16mm

■ 2m G812-3157
□ 2m G812-3159
■ 2m G812-3158


AV04 P.114

max. 14/16mm

■ 2m G812-3160
□ 2m G812-3162
■ 2m G812-3161


AV05 P.116

max. 16mm

■ 2m G812-3163
□ 2m G812-3165
■ 2m G812-3164


AV06 P.118

max. 12/16mm

□ 2m G812-3166
■ 2m G812-3167


LP13 P.120

max. 12mm

■ 2m G810-1004
□ 2m G810-1003
■ 2m G810-1002

GESSO CARTONADO | DRYWALL


BTP01 P.124

max. 6mm

■ 2m G810-2050
■ 2m G810-2056


BTP02 P.126

max. 11mm

■ 2m G810-2040
□ 2m G810-3040


BTP03 P.128


max. 14mm

■ 2m G810-2051


BTP04 P.130

max. 14mm

■ 2m G810-2042


BTP05 P.132

max. 20mm

■ 2m G810-2043


BTP06 P.134

max. 14mm

■ 2m G810-2044


BTP07 P.136

max. 6mm

■ 2m G810-2045


BTP10 P.138

max. 11mm

■ 2m G810-2047
□ 2m G810-3047
■ 2m G810-2053


BTP11 P.140


max. 14mm

■ 2m G810-2048
□ 2m G810-3048
■ 2m G810-2054


BTP12 P.142

max. 14mm

■ 2m G810-2049
□ 2m G810-3049
■ 2m G810-2055


BTP13 P.144

max. 20mm

■ 2m G810-3090


BTP08

■ 2m G810-2046
□ 2m G810-3046
■ 2m G810-2052

BTP08

■ 2m G810-2046
□ 2m G810-3046
■ 2m G810-2052

AZULEJO | TILE



PF01 P.148

max. 12mm

■ 2m G810-2032

PF02 P.150

max. 12mm

■ 2m G810-2034

PF03 P.152

max. 8mm

■ 2m G812-3174

□ 2m G812-3322

PF04 P.154

max. 10mm

■ 2m G812-3176

□ 2m G812-3320

PF05 P.156

max. 12mm


■ 2m G810-2036

PF08V2 P.158

max. 12mm

■ 2m G810-2230

ESPECIAL | SPECIAL

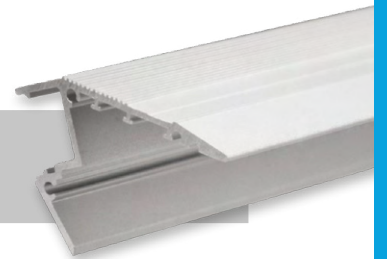

NP33 P.162

max. 14mm

■ 2m G810-5050

PB02 P.164

max. 12mm

■ 2m G810-2083

PM01 P.166

max. 6mm

■ 2m G812-3168

□ 2m G812-3170

■ 2m G812-3169

PM02 P.168

max. 6mm

■ 2m G812-3171

□ 2m G812-3173

■ 2m G812-3172

PS01 P.170

max. 13mm

■ 2m G812-2100

FONTES E CONTROLADORES

POWER SUPPLYS & CONTROLLERS

FONTES DE ALIMENTAÇÃO | POWER SUPPLY



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.174
ON / OFF



24V P.175
DALI - 2



24V P.175
DALI - 2



24V P.175
TRIAC



24V P.176
WIRELESS



24V P.176
WIRELESS



24V P.176
WIRELESS



CONTROLADORES | CONTROLLERS



P.177
SCENECOM S



P.177
DALI Power Supply



P.177
DALI XC Module



P.178
Active Module
CASAMBI



P.178
Active Module
TRIDONIC



P.178
Passive module CASAMBI



P.178
Passive module TRIDONIC



P.178
CASAMBI Sensor



P.180
CASAMBI Module 4ch

CONTROLADORES | CONTROLLERS



P.180

CASAMBI Switch

P.180

CASAMBI Interface

P.181

Controller + Remote Control RF



P.181

Amplifier RF

P.182

WI-FI Controller

P.182

WI-FI/RF Cotroller

P.183

Remote Controller

P.183

RF Touch Panel

LUMINÁRIAS | LIGHTINGS



FOLLOW-ME

P.186

EMERGENCY LIGHTING

SOFTIS

P.190

INDUSTRIAL LIGHTING

LED NEON





2005-105 LED NEON

PROFISSIONAL | PROFESSIONAL
196 LED/M

SMD
2216

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III





-20° -40°



CUT 3,57CM



5m

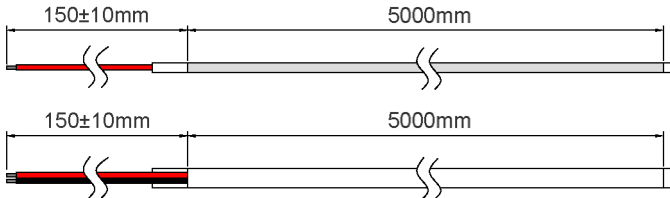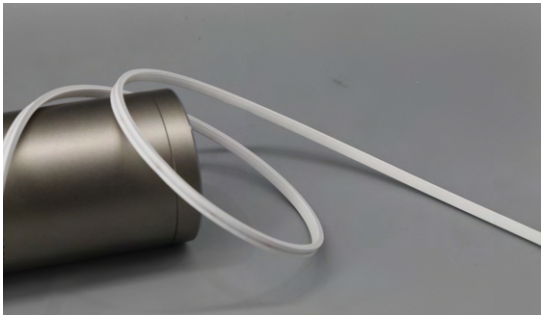

TECHNICAL DATA

POWER

4,8 W/m

CRI

90

CCT

3000K
4000K

LUMENS/M


140 lm/m
150 lm/m

EFFICACY

29 lm/W
31 lm/W

ORDER CODE

2005-105.90.30
2005-105.90.40

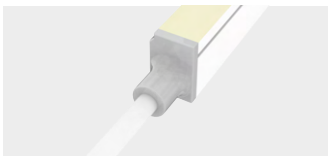

Topo inicial | Entry cap

8110-0015



Topo final | End cap

8110-0016

2005-104 LED NEON

PROFISSIONAL | PROFESSIONAL
240 LED/M

LED NEON

brilumen

**SMD
2219**

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° -40°





CUT 2,5CM

5
YEARS
WARRANTY

5m




CE

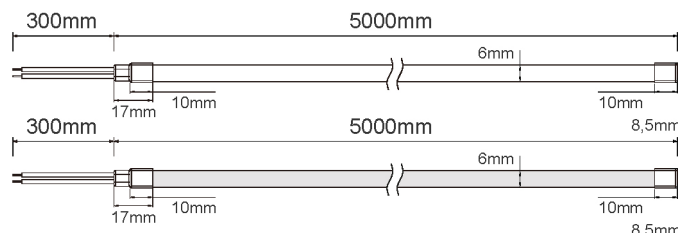


TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
5 W/m	90	3000K 4000K	385 lm/m 385 lm/m	77 lm/W 77 lm/W	2005-104.90.30 2005-104.90.40

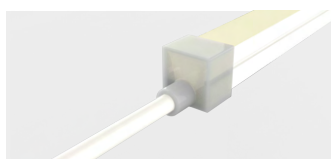

Topo inicial | Entry cap

8110-0011

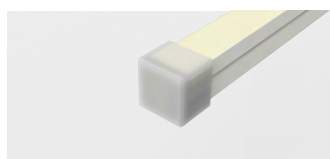

Topo final | End cap

8110-0012

Clip de alumínio |
Aluminium clip

8110-0013

Perfil de alumínio 1m |
Aluminium profile 1m

8110-0014

2005-106 LED NEON

PROFISSIONAL | PROFESSIONAL
120 LED/M

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III




-20° -40°



CUT 5CM





5m



5m



CE

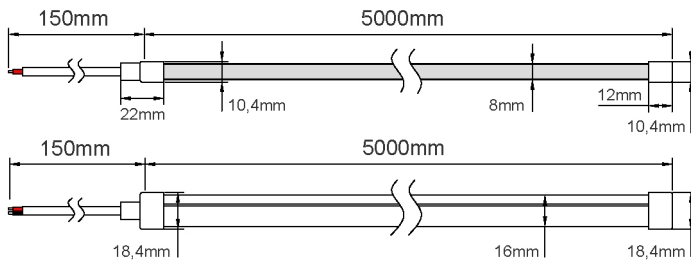

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

5 W/m


90

3000K
4000K

154 lm/m
186 lm/m


31 lm/W
37 lm/W

2005-106.90.30
2005-106.90.40



Topo inicial | Entry cap

8110-0017

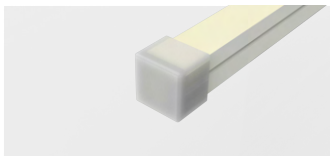

Topo final | End cap

8110-0018



Clip de alumínio |
Aluminium clip

8110-0019



Perfil de alumínio 1m |
Aluminium profile 1m

8110-0020

2005-101 LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

SMD
2835
LED TYPE

24V
VOLTAGE

24H
USE

IP67



CLASS III

-20° ~40°


CUT 4,16CM

5
YEARS
WARRANTY


5m

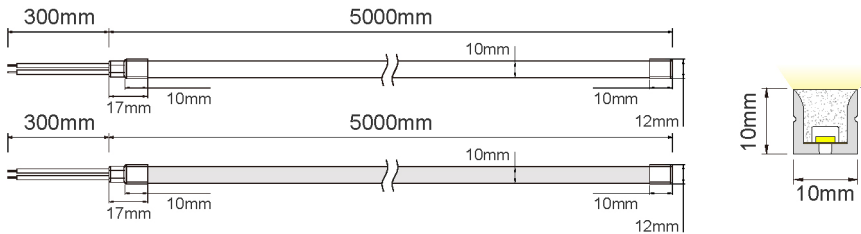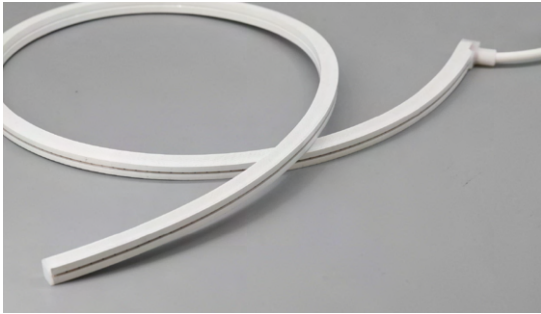

TECHNICAL DATA	POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
	10 W/m	90	3000K 4000K	760 lm/m 760 lm/m	76 lm/W 76 lm/W	2005-101.90.30 2005-101.90.40



Topo inicial | Entry cap
8110-0006

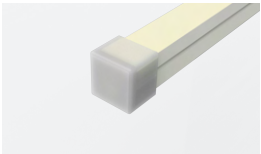

Topo final | End cap
8110-0007



Clip de alumínio |
Aluminium clip
8110-0008



Perfil de alumínio 1m |
Aluminium profile 1m
8110-0009



Perfil alumínio S |
Aluminium profile S
8110-0010

2005-102 LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE




IP67



CLASS III




-20° ~40°



CUT 4,16CM






5
YEARS
WARRANTY



5m



CE

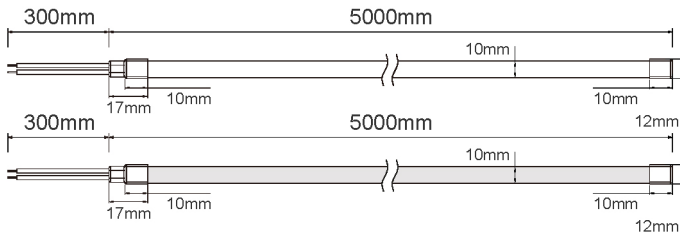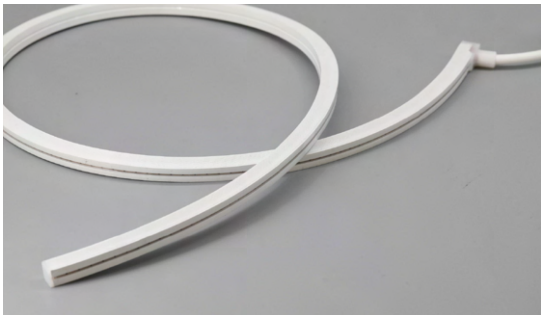

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

10 W/m


90

3000K
4000K


760 lm/m
760 lm/m

76 lm/W
76 lm/W

2005-102.90.30
2005-102.90.40

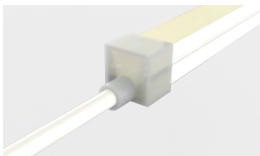

Topo inicial | Entry cap
8110-0006



Topo final | End cap
8110-0007



Clip de alumínio |
Aluminium clip
8110-0008



Perfil de alumínio 1m |
Aluminium profile 1m
8110-0009



Perfil alumínio S |
Aluminium profile S
8110-0010

2005-103 LED NEON

PROFISSIONAL | PROFESSIONAL
168 LED/M

LED NEON

brilumen

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° ~40°





CUT 4,16CM

5
YEARS
WARRANTY

5m




CE

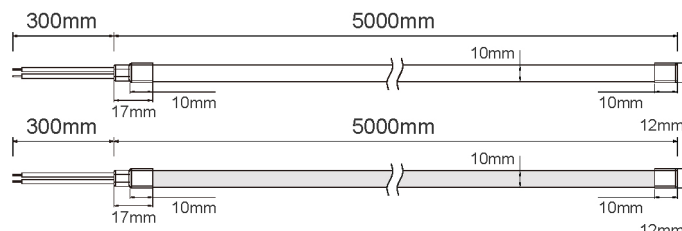


TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	90	2700K	780 lm/m	78 lm/W	2005-103.90.27
		3000K	800 lm/m	80 lm/W	2005-103.90.30
		4000K	800 lm/m	80 lm/W	2005-103.90.40



Topo inicial | Entry cap

8110-0006



Topo final | End cap

8110-0007

Clip de alumínio |
Aluminium clip

8110-0008

Perfil de alumínio 1m |
Aluminium profile 1m

8110-0009

Perfil alumínio S |
Aluminium profile S

8110-0010

2005-107 LED NEON

PROFISSIONAL | PROFESSIONAL
192 LED/M

SMD
2216

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° -40°



CUT 3,1CM





5
YEARS
WARRANTY



5m



CE

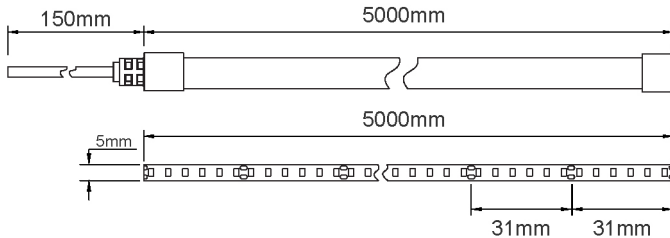

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

10 W/m

90

3000K
4000K

530 lm/m
540 lm/m

53 lm/W
54 lm/W

2005-107.90.30
2005-107.90.40



Topo inicial | Entry cap

8110-0021




Topo final | End cap

8110-0022



Clip de PVC | PVC clip

8110-0023

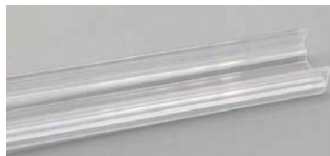

Perfil de PVC 1m | PVC profile 1m

8110-0024

2005-100 LED NEON

PROFISSIONAL | PROFESSIONAL
120 LED/M

LED NEON

brilumen

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° ~40°



CUT 5CM




5m



5m




CE

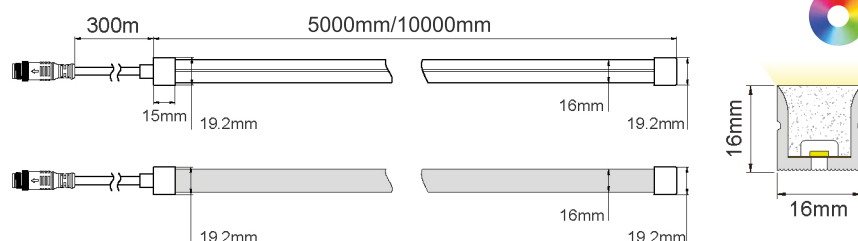


TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
15 W/m	90	2700K	766 lm/m	51 lm/W	2005-100.90.27
15 W/m	90	3000K	870 lm/m	58 lm/W	2005-100.90.30
15 W/m	90	4000K	915 lm/m	61 lm/W	2005-100.90.40
RGB-R 5 W/m RGB-G 5 W/m RGB-B 5 W/m	—	—	RGB-R 108 lm/m RGB-G 194 lm/m RGB-B 41 lm/m	RGB-R 22 lm/W RGB-G 39 lm/W RGB-B 8 lm/W	2005-100.RGB

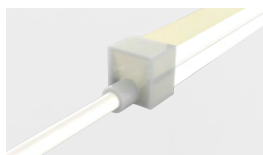


Topo inicial | Entry cap

8110-0001

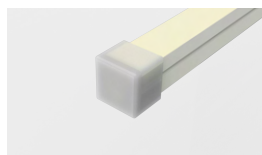

Topo final | End cap

8110-0002

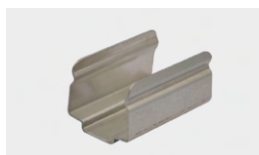Clip de alumínio |
Aluminium clip

8110-0003

Perfil de alumínio 1m |
Aluminium profile 1m

8110-0004

Perfil alumínio S |
Aluminium profile S

8110-0005


FITAS DE LED | LED STRIPS






2002-160 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20° -40°	CUT 2,5CM	5 YEARS WARRANTY	5m	

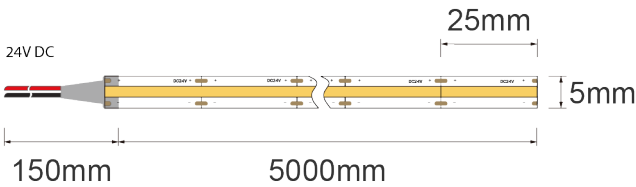

TECHNICAL DATA	POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
	6,5 W/m	90	3000K	617 lm/m	95 lm/W	2002-160.90.30
			4000K	650 lm/m	100 lm/W	2002-160.90.40

2002-158 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
512 LED/M

FITAS DE LED

britumen

COB

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° ~40°



CUT 6,25CM




5 YEARS
WARRANTY



5m



CE

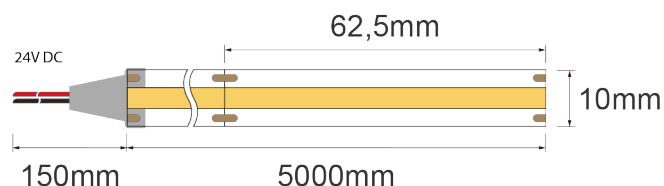

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
11 W/m	90	2700K	990 lm/m	90 lm/W	2002-158.90.27
		3000K	1050 lm/m	95 lm/W	2002-158.90.30
		4000K	1150 lm/m	105 lm/W	2002-158.90.40

2002-171 FITA LED | LED STRIP

ECO
256 LED/M

COB

LED TYPE

24V

VOLTAGE

6H

USE

IP20

CLASS III


-20° -40°

CUT 3,1CM

3 YEARS WARRANTY

5m

CE

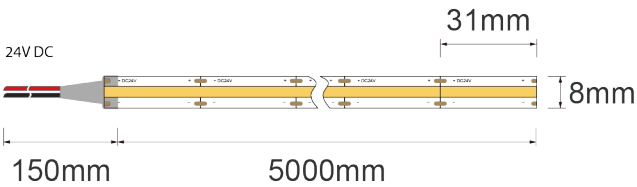

TECHNICAL DATA	POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
	11 W/m	90	3000K	1139 lm/m	103 lm/W	2002-171.90.30
			4000K	1180 lm/m	107 lm/W	2002-171.90.40

2002-159 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
480 LED/M

FITAS DE LED

brilumen

COB

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° -40°



CUT 5CM




5 YEARS
WARRANTY



5m



CE

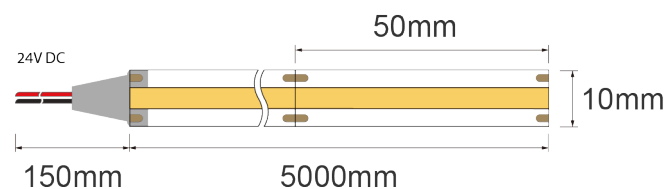

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
12 W/m	80	3000K	1260 lm/m	105 lm/W	2002-159.80.30
		4000K	1320 lm/m	110 lm/W	2002-159.80.40

2002-172 FITA LED | LED STRIP

ECO
256 LED/M

COB

LED TYPE

24V

VOLTAGE

6H

USE



IP65



CLASS III




-20° -40°



CUT 3,1CM




3
YEARS
WARRANTY



5m



CE

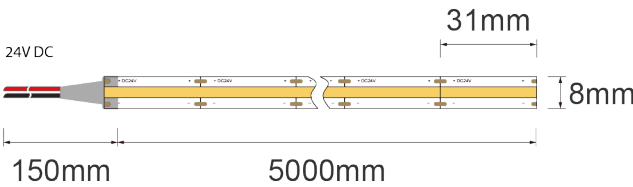

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
11 W/m	90	3000K	1139 lm/m	103 lm/W	2002-172.90.30
		4000K	1180 lm/m	107 lm/W	2002-172.90.40

2002-162 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
480 LED/M

COB

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° -40°



CUT 2,5CM




5 YEARS
WARRANTY



5m



CE

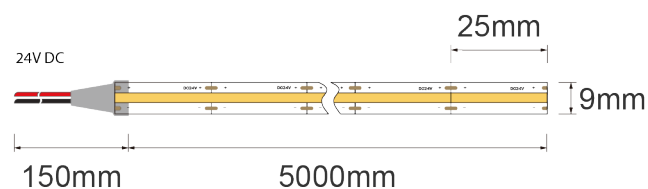



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
6,5 W/m	90	3000K 4000K	617 lm/m 650 lm/m	95 lm/W 100 lm/W	2002-162.90.30 2002-162.90.40

2002-161 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
480 LED/M

COB	24V	24H							
LED TYPE	VOLTAGE	USE	IP67	CLASS III	-20° -40°	CUT 5CM	5 YEARS WARRANTY	5m	

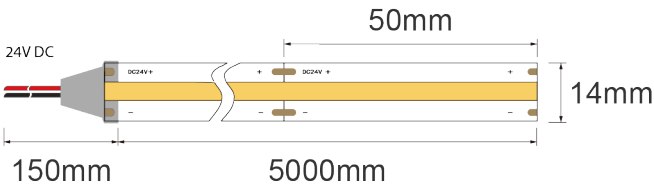

TECHNICAL DATA	POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
	12 W/m	80	3000K	1260 lm/m	105 lm/W	2002-161.80.30
			4000K	1320 lm/m	110 lm/W	2002-161.80.40

2002-173

FITA LED | LED STRIP

ECO
288 LED/M

FITAS DE LED

brilumen

COB

LED TYPE

230V
AC

VOLTAGE

6H

USE



IP65



CLASS III



-20° -40°




CUT 50CM



2 YEARS
WARRANTY



50m

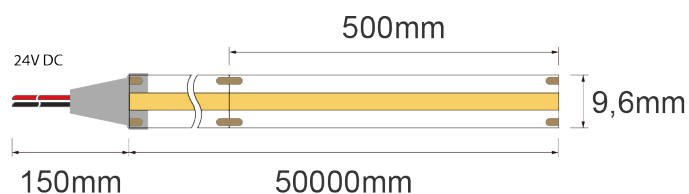

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
9 W/m	80	3000K	598 lm/m	66 lm/W	2002-173.80.30
		4000K	620 lm/m	68 lm/W	2002-173.80.40



Retificador | Power cord
8013-0050



Topo | End cap
8013-0051



Braçadeira | Clip
8013-0052

2002-163 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
180 LED/M

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III




-20° -40°



CUT 5CM



5m

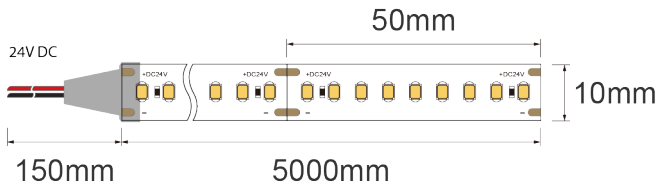

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

9,6 W/m

80

3000K
4000K

1850 lm/m
1920 lm/m

192 lm/W
200 lm/W

2002-163.80.30
2002-163.80.40

2002-167 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
112 LED/M

FITAS DE LED

briluman

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° -40°



CUT 7,14CM



5
YEARS
WARRANTY



5/25m



CE



TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	80	3000K	1550 lm/m	155 lm/W	2002-167.80.30
		4000K	1600 lm/m	160 lm/W	2002-167.80.40
		3000K	1550 lm/m	155 lm/W	2002-167.80.30-25M
		4000K	1600 lm/m	160 lm/W	2002-167.80.40-25M





2002-170

FITA LED | LED STRIP

ECO
120 LED/M

SMD 2835	24V	6H							
LED TYPE	VOLTAGE	USE	IP20	CLASS III	-20° -40°	CUT 5CM	3 YEARS WARRANTY	5m	

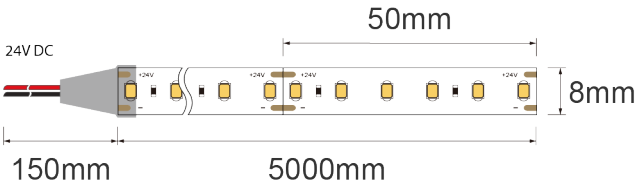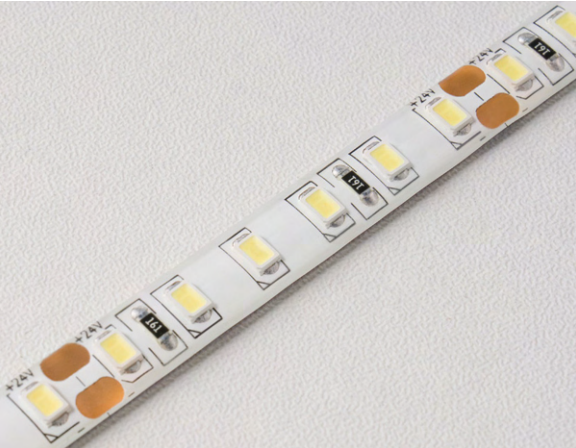

TECHNICAL DATA	POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
	10,5 W/m	80	3000K	1062 lm/m	101 lm/W	2002-170.80.30
			4000K	1100 lm/m	104 lm/W	2002-170.80.40

2002-156 TUNABLE WHITE FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
640 LED/M

**CSP
640**

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° -40°



CUT 5CM




5 YEARS
WARRANTY



5m



CE

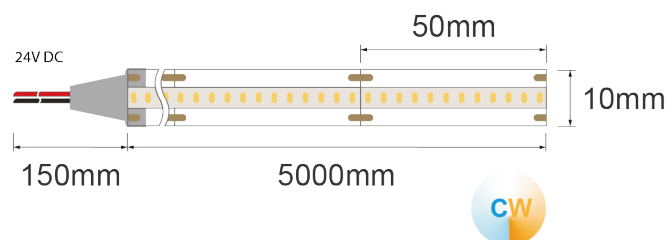

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
5,5 W/m	80	2700K	528 lm/m	96 lm/W	2002-156.92765
11 W/m		4000K	1100 lm/m	100 lm/W	
5,5 W/m		6500K	566 lm/m	103 lm/W	

2002-135

FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
60 LED/M

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE




IP20



CLASS III



-20° ~40°




CUT 10CM



5m



5m

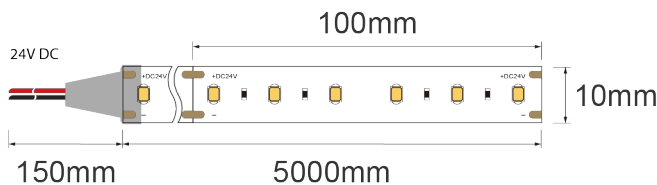

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

14,4 W/m

80

2700K
3000K
4200K
6500K

1195 lm/m
1253 lm/m
1296 lm/m
1368 lm/m

83 lm/W
87 lm/W
90 lm/W
95 lm/W

2002-135.80.27
2002-135.80.30
2002-135.80.42
2002-135.80.65



Conetor fita LED 12,5mm
LED strip connector 12,5mm
8013-0026




Conetor fita LED 14,5mm
LED strip connector 14,5mm
8013-0014



Conetor com ligador
Connector with wire
8013-0015



Conetor duplo com ligador
Double connector with wire
8013-0016

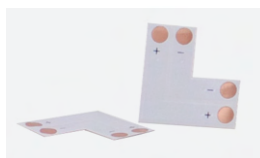

Conetor em L
L connector
8013-0017

2002-165 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
160 LED/M

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° -40°



CUT 5CM




5 YEARS
WARRANTY



5m



CE

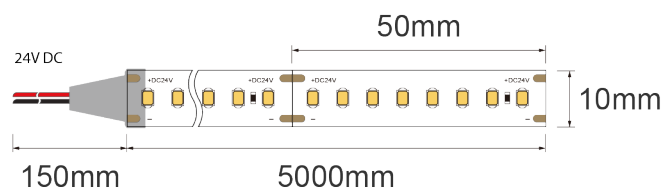

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	80	3000K 4000K	2203 lm/m 2304 lm/m	153 lm/W 160 lm/W	2002-165.80.30 2002-165.80.40

2002-166 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
160 LED/M

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III





-20° -40°



CUT 5CM



5m

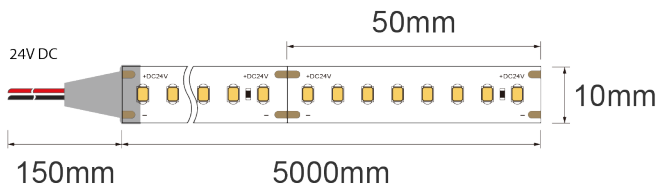

TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

14,4 W/m

90

2700K
3000K
4000K

1756 lm/m
1857 lm/m
1944 lm/m

122 lm/W
129 lm/W
135 lm/W

2002-166.90.27
2002-166.90.30
2002-166.90.40

2002-164 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
240 LED/M

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE



IP20



CLASS III



-20° -40°




CUT 3,33CM



5 YEARS
WARRANTY



5m

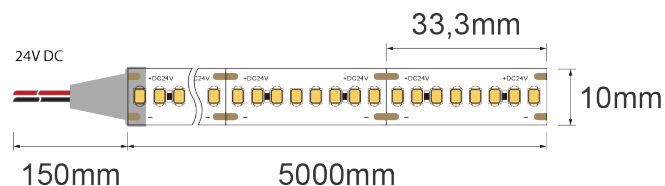

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
21,6 W/m	80	3000K	3265 lm/m	151 lm/W	2002-164.80.30
		4000K	3456 lm/m	160 lm/W	2002-164.80.40

2002-168

FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
112 LED/M

SMD
2835

LED TYPE

24V

VOLTAGE

24H

USE



IP65



CLASS III



-20° -40°



CUT 7,14CM



5m



5m



TECHNICAL DATA

POWER

CRI

CCT

LUMENS/M

EFFICACY

ORDER CODE

10 W/m

80

3000K
4000K

1550 lm/m
1600 lm/m

155 lm/W
160 lm/W

2002-168.80.30
2002-168.80.40

2002-142 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
60 LED/M

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE



IP65



CLASS III



-20° -40°



CUT 10CM




5 YEARS
WARRANTY



5m



CE

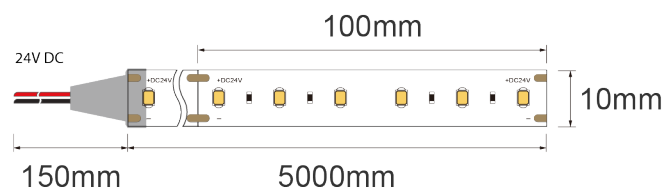

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
14,4 W/m	80	2700K	1195 lm/m	83 lm/W	2002-142.80.27
		3000K	1253 lm/m	87 lm/W	2002-142.80.30
		4200K	1296 lm/m	90 lm/W	2002-142.80.42
		6500K	1368 lm/m	95 lm/W	2002-142.80.65

2002-1116 RGBW FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
60 LED/M

SMD
5050

LED TYPE

24V

VOLTAGE

24H

USE



IP65



CLASS III



-20° -40°




CUT 10CM



5m



5m

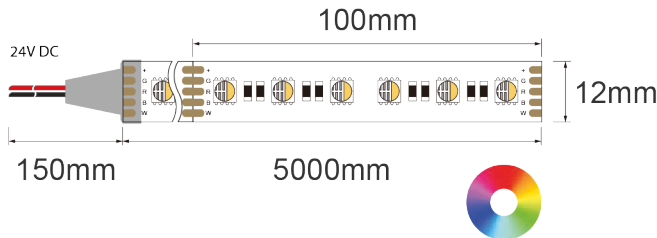

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
3,6 W/m	80	RED(620-625NM)	100 lm/m	28 lm/W	2002-1116
3,6 W/m		GREEN(520-525NM)	240 lm/m	67 lm/W	
3,6 W/m		BLUE(460-470NM)	65 lm/m	18 lm/W	
3,6 W/m		6500K	370 lm/m	103 lm/W	
14,4 W/m		RGBW	775 lm/m	54 lm/W	

2002-169 FITA LED | LED STRIP

PROFISSIONAL | PROFESSIONAL
112 LED/M

**SMD
2835**

LED TYPE

24V

VOLTAGE

24H

USE



IP67



CLASS III



-20° -40°



CUT 7,14CM




5 YEARS
WARRANTY



5m



CE

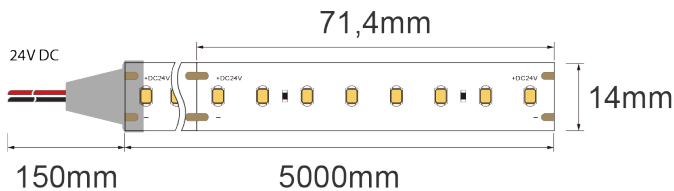

TECHNICAL DATA

POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
10 W/m	80	3000K	1550 lm/m	155 lm/W	2002-169.80.30
		4000K	1600 lm/m	160 lm/W	2002-169.80.40

2002-174

FITA LED | LED STRIP

ECO
120 LED/M

SMD
2835

LED TYPE

230V
AC

VOLTAGE

6H

USE



IP65



CLASS III




-20° -40°



CUT 10CM



100m

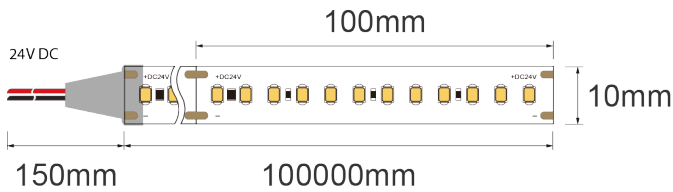


TECHNICAL DATA


POWER	CRI	CCT	LUMENS/M	EFFICACY	ORDER CODE
9 W/m	80	3000K	1091 lm/m	121 lm/W	2002-174.80.30
		4000K	1130 lm/m	125 lm/W	2002-174.80.40




Conetor | Connector
8013-0053

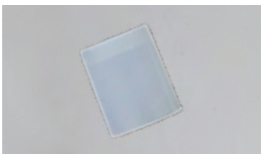

Topo | End cap
8013-0054



Braçadeira | Clip
8013-0055

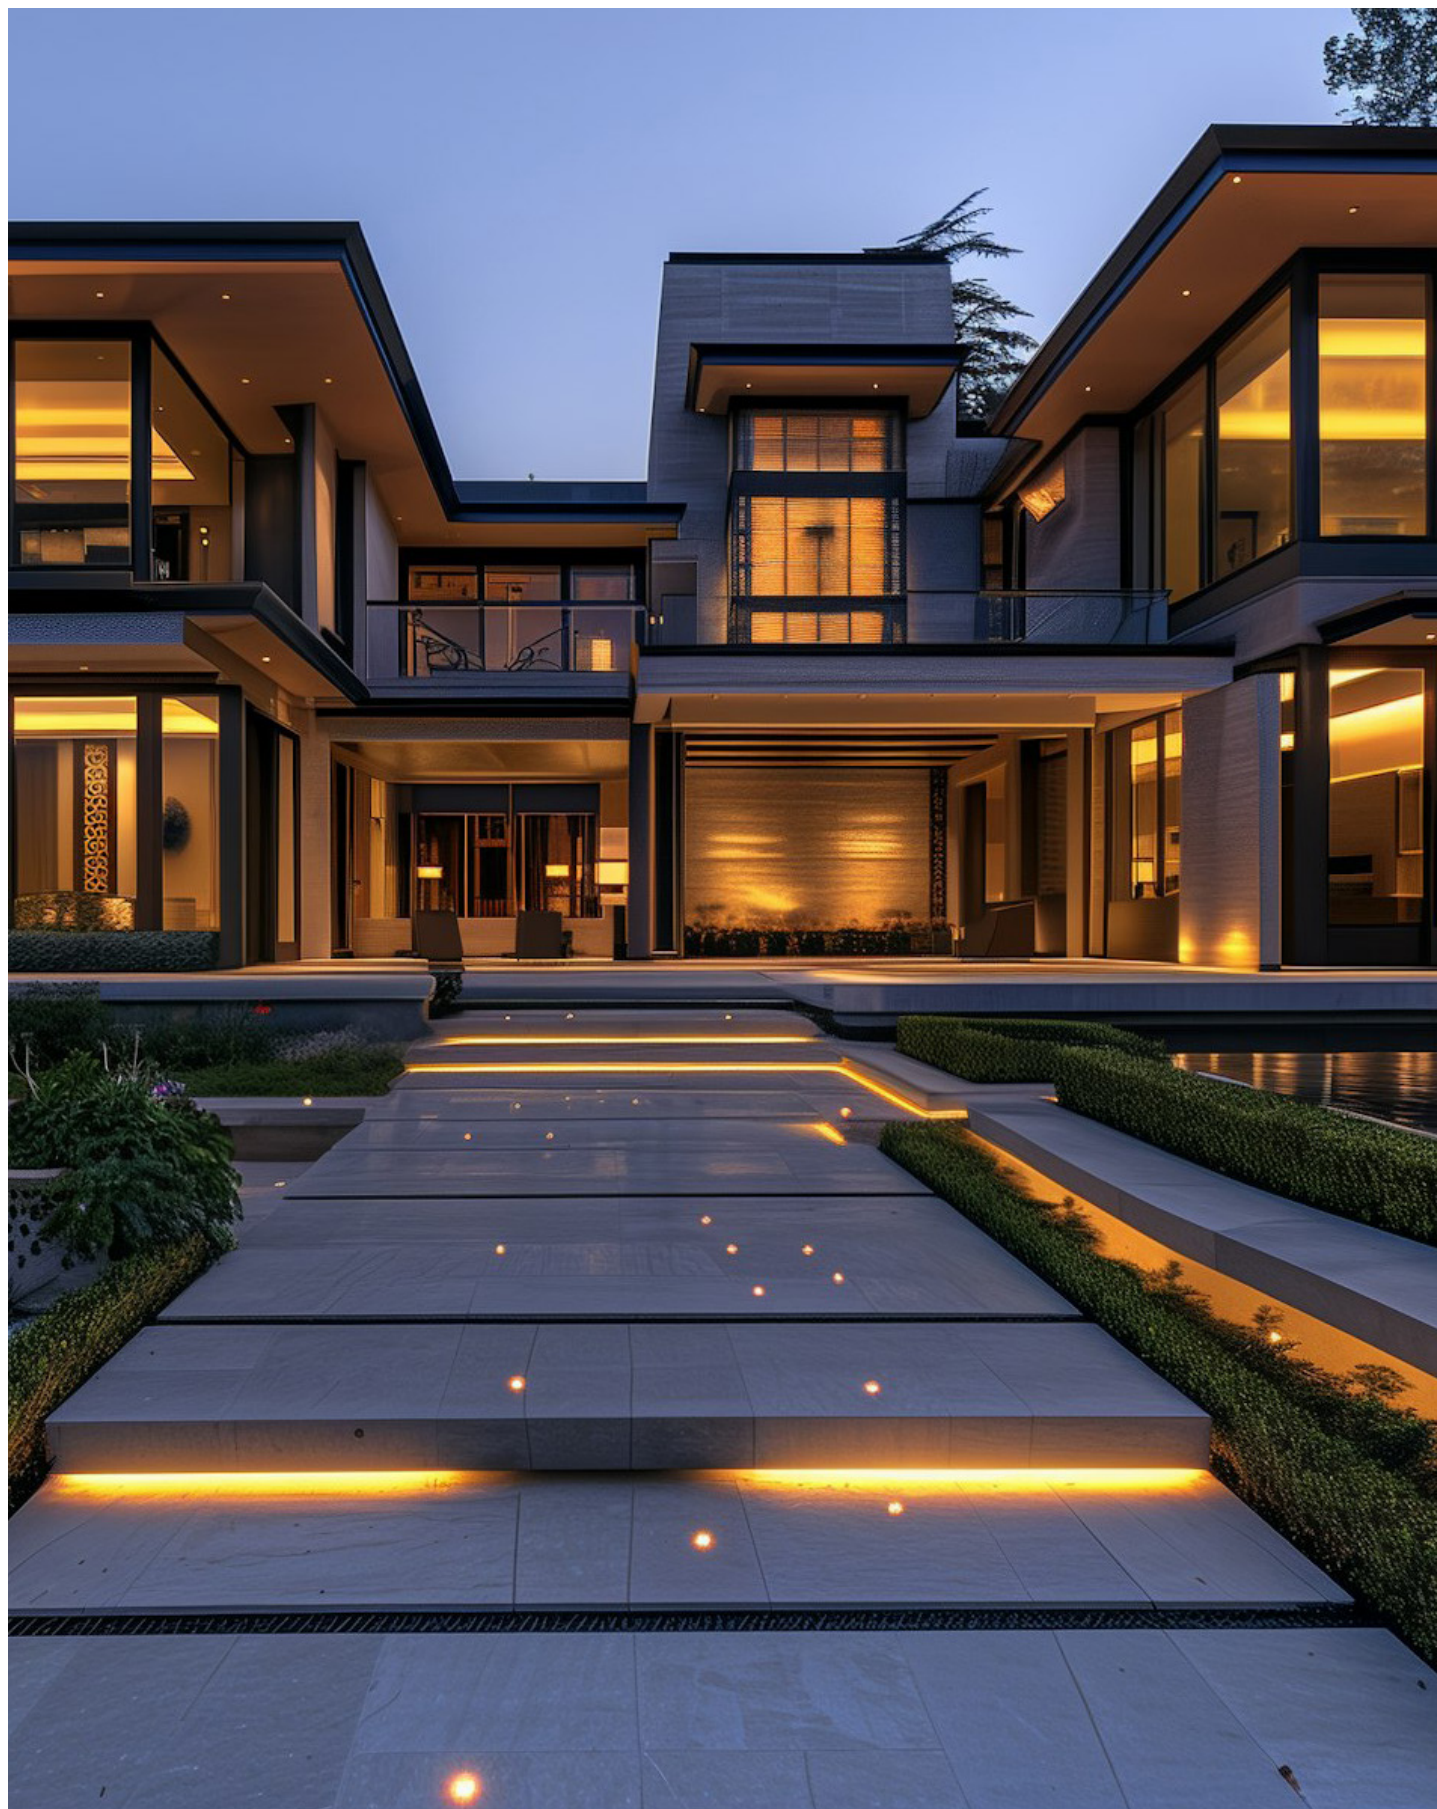

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES
SALIENTE | SURFACE





LP02

SALIENTE | SURFACE




12mm
WIDTH MAX.



138g/m
WEIGHT



200cm
LENGTH



LP02 + C2



LP02 + LP10 + C1





LP02 + LP10 + C32



LP02 + LP10 + C2 + Z03

PERFIS PROFILES		
LP02	AL	G810-6022
LP02	WH	G810-6023 ●
LP02	BL	G810-6024 ●
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E4		G810-6125
E4W		G810-6126 ●
E4B		G810-6127 ●
E5		G810-6020
E5W		G810-6027 ●
E5B		G810-6028 ●
E6		G810-6115
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
LP10	WH	G810-7013 ●
LP10	BL	G810-7014 ●
BL1		G812-3334
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z03W		G830-1512 ●
Z03B		G830-1511 ●
Z05		G830-1501
ACESSÓRIOS ACCESSORIES		
Z01	AL	G810-6210
	WH	G810-6212 ●
	BL	G810-6211 ●
Z41	AL	G830-4029
	WH	G830-4031 ●
	BL	G830-4030 ●
Z43	AL	G830-4035
	WH	G830-4037 ●
	BL	G830-4036 ●
LP10.1	10cm	G810-1085
	200cm	G810-1080

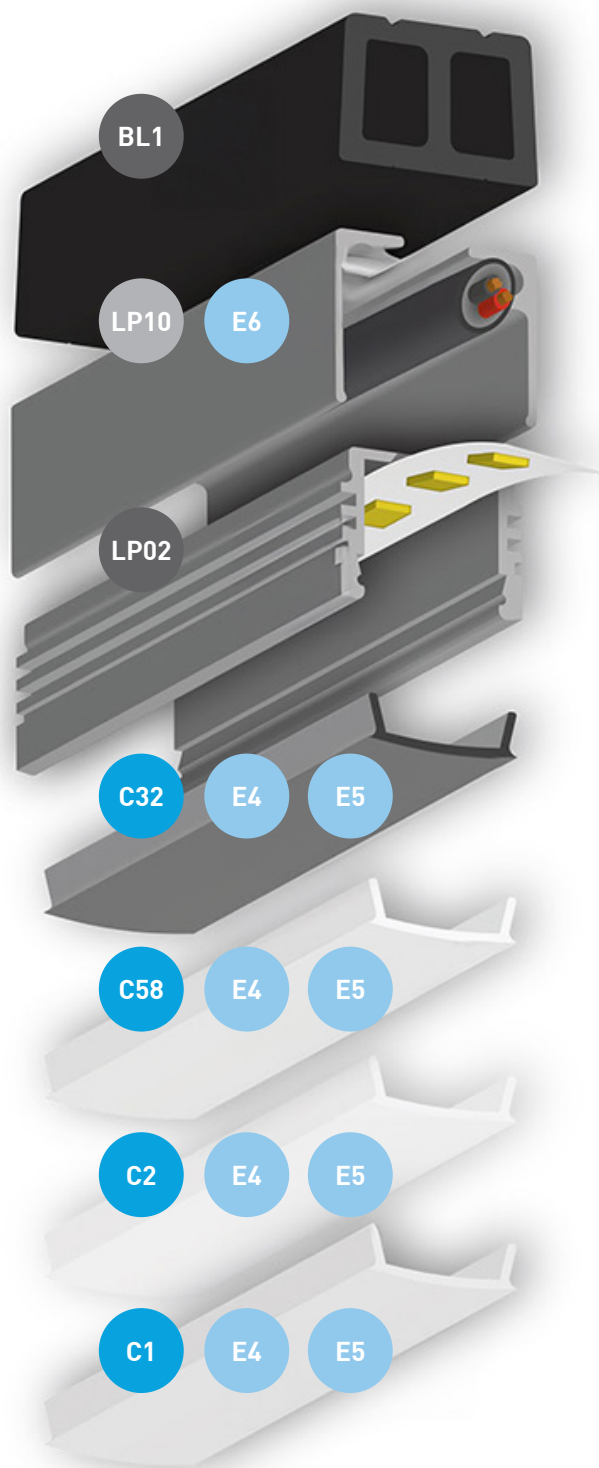

● Sob consulta | Under request

LP06

SALIENTE | SURFACE




12mm
WIDTH MAX.




100g/m
WEIGHT



200cm
LENGTH




LP06 + C3



LP06 + LP10 + C4





LP06 + C3

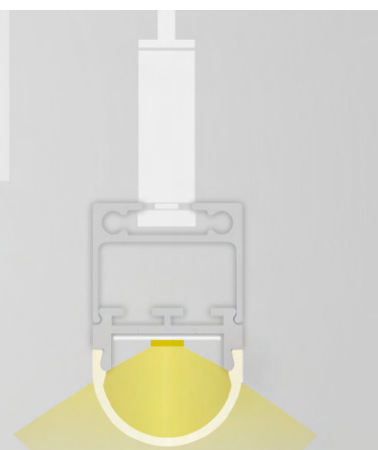

LP06 + LP10 + C5 + Z03

PERFIS PROFILES		
LP06	AL	G810-6062
DIFUSORES DIFFUSERS		
C3	65%	G860-0005
C4	65%	G860-0006
C5	65%	G860-0007
TOPOS END CAPS		
E16	C4	G810-6068
E17	C4	G810-6063
E18	C4	G810-6064
E19	C5	G810-6067
E20	C5	G810-6168
E21	C5	G810-6130
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
Z10		G830-1504
Z05		G830-1501
Z03		G830-1502
Z03W		G830-1512 ●
Z03B		G830-1511 ●
Z11		G830-1505
ACESSÓRIOS ACCESSORIES		
Z01	AL WH BL	G810-6210 G810-6212 ● G810-6211 ●
LP10.1	10cm 200cm	G810-1085 G810-1080
Z12		G830-1506
Z13		G830-1507

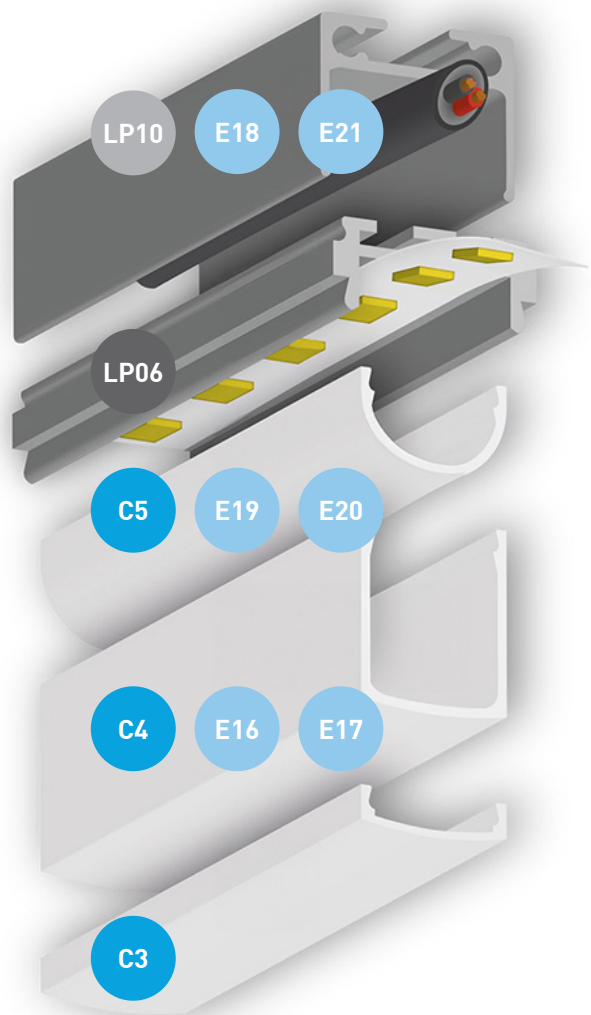

NP04

SALIENTE | SURFACE



24mm
WIDTH MAX.




225g/m
WEIGHT




200cm
LENGTH




NP04 + C30 + Z03B




NP04 + C12



NP04 + LP10 + C11

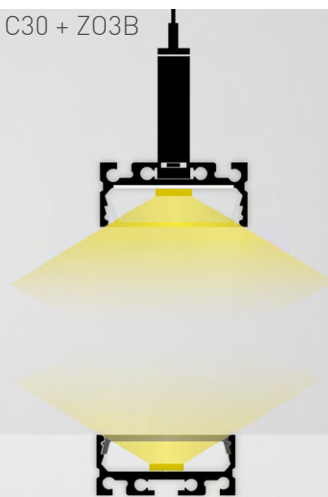

NP04 + C33

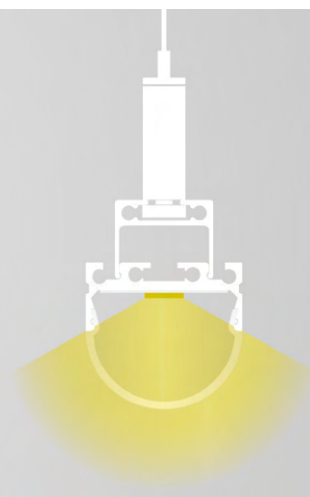

NP04 + LP10 + C13 + Z03

PERFIS | PROFILES

NP04	AL	G820-1012	
NP04	WH	G820-1013	●
NP04	BL	G820-1014	●

DIFUSORES | DIFFUSERS

C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	

TOPOS | END CAPS

E43		G820-1011	
E43W		G820-1015	●
E43B		G820-1016	●
E44		G820-2011	
E44W		G820-2012	●
E44B		G820-2013	●
E45		G820-3011	
E45W		G820-3012	●
E45B		G820-3013	●
E46		G820-4011	
E46W		G820-4012	●
E46B		G820-4013	●


LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
	WH	G810-7013	●
	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	

ACESSÓRIOS | ACCESSORIES

LP10.1		10 cm	G810-1085	
LP10.1		200 cm	G810-1080	
Z24			G830-1510	
Z45			G830-1517	
Z46			G830-1518	
Z50			G812-3360	
Z03			G830-1502	
Z03W			G830-1512	●
Z03B			G830-1511	●
Z05			G830-1501	

PERFIS DE ALUMÍNIO ALUMINIUM PROFILES

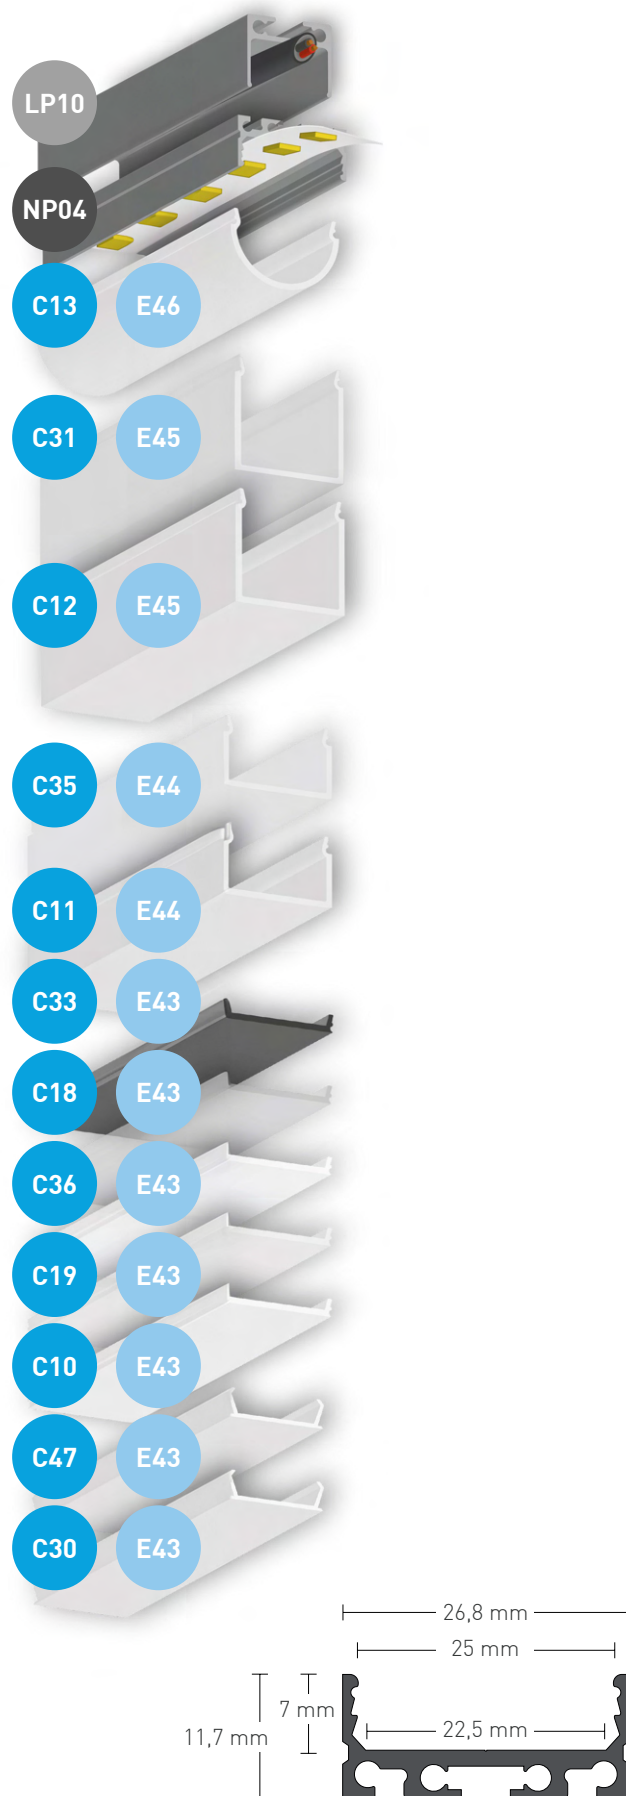

● Sob consulta | Under request

NP06 V2

SALIENTE | SURFACE



24mm
WIDTH MAX.



334g/m
WEIGHT




200cm
LENGTH

NP06 V2 + C30 + Z03B



NP06 V2 + LP10 + C13 + Z03



NP06 V2 + C12



NP06 V2 + LP10 + C11

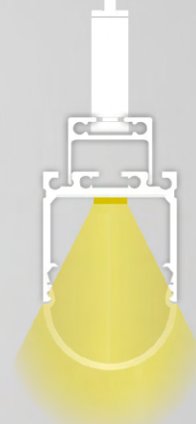

NP06 V2 + C33

PERFIS | PROFILES

NP06 V2	AL	G830-1017	
NP06 V2	WH	G830-1018	●
NP06 V2	BL	G830-1019	●

DIFUSORES | DIFFUSERS

C30	65%	G860-0077	●
C47	75%	G860-0099	●
C10	65%	G860-0017	
C19	75%	G860-0036	●
C36	75%	G860-0078	●
C18	85%	G860-0035	●
C33	25%	G860-0072	●
C11	65%	G860-0018	
C35	85%	G860-0063	●
C12	65%	G860-0019	
C31	85%	G860-0068	●
C13	65%	G860-0020	

TOPOS | END CAPS

E47	G830-1011	
E47W	G830-1015	●
E47B	G830-1016	●
E48	G830-2011	
E48W	G830-2012	●
E48B	G830-2013	●
E49	G830-3011	
E49W	G830-3012	●
E49B	G830-3013	●
E50	G830-4011	
E50W	G830-4012	●
E50B	G830-4013	●



LUMINÁRIA LINEAR SUSPENSÃO | LINEAR SUSPENSION LUMINAIRE

LP10	AL	G810-7012	
	WH	G810-7013	●
	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z05		G830-1501	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●

ACESSÓRIOS | ACCESSORIES

LP10.1	10 cm	G810-1085	
LP10.1	200 cm	G810-1080	
Z24		G830-1510	
Z45		G830-1517	
Z46		G830-1518	
Z50		G812-3360	
Z05		G830-1501	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●

PERFIS DE ALUMÍNIO ALUMINIUM PROFILES

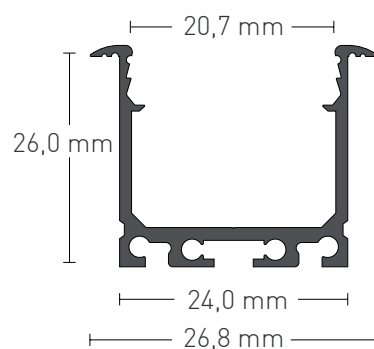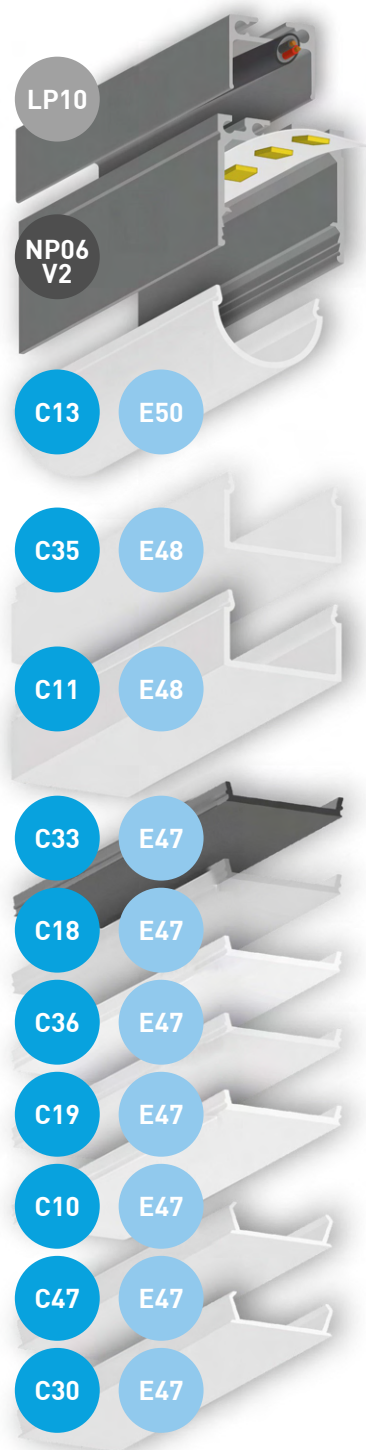

● Sob consulta | Under request

NP08

SALIENTE | SURFACE




16mm
WIDTH MAX.




188g/m
WEIGHT




200cm
LENGTH




NP08 + C20



NP08 + LP10 + C42





NP08 + C1 + NP33

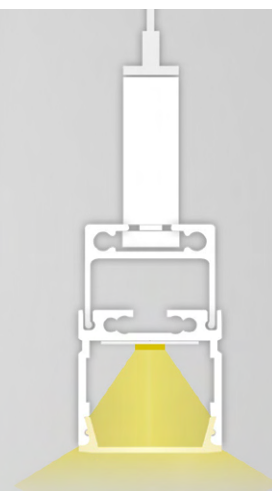

NP08 + LP10 + C10 + Z03W

PERFIS PROFILES		
NP08	AL	G810-1020
NP08	WH	G810-1021 ●
NP08	BL	G810-1022 ●
DIFUSORES DIFFUSERS		
C20	65%	G860-0048
C42	25%	G860-0092 ●
C21	65%	G860-0050 ●
TOPOS END CAPS		
E58	C20	G810-1027
E58W		G810-1023 ●
E58B		G810-1019 ●
E59	C20	G810-1028
E59W		G810-1024 ●
E59B		G810-1029 ●
E56	C21	G810-1025
E57	C21	G810-1026
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
LP10	WH	G810-7013 ●
LP10	BL	G810-7014 ●
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z03W		G830-1512 ●
Z03B		G830-1511 ●
Z05		G830-1501
ACESSÓRIOS ACCESSORIES		
LP10.1	10 cm	G810-1085
LP10.1	200 cm	G810-1080
Z34		G810-1010
Z10		G830-1504
Z11		G830-1505
Z50		G812-3360

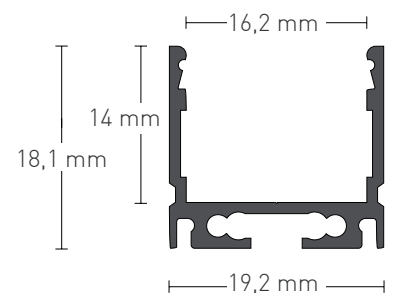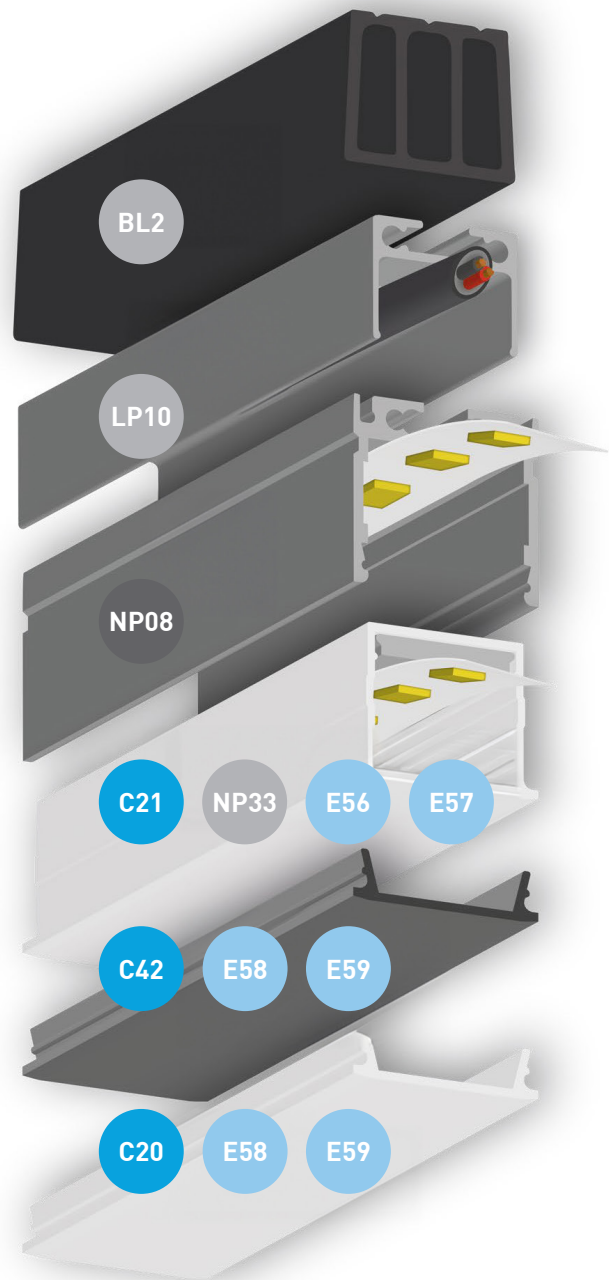

● Sob consulta | Under request

NP17 V2

SALIENTE | SURFACE

PERFIS DE ALUMÍNIO

brilumen





30mm
WIDTH MAX.




1035g/m
WEIGHT



200cm
LENGTH

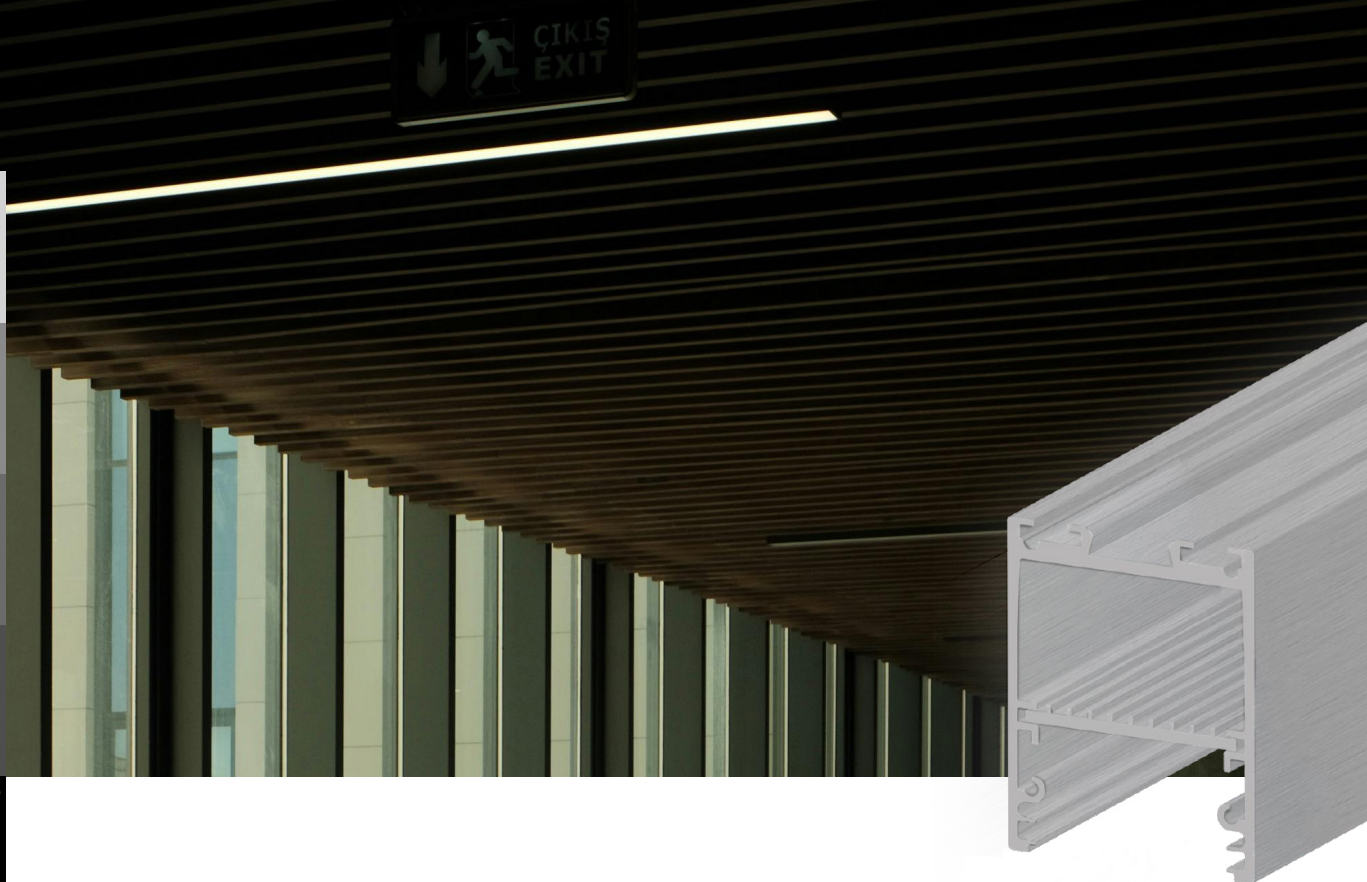

NP17 V2 + C29






NP17 V2 + C61



NP17 V2 + C61 + C2 + Z04

PERFIS PROFILES		
NP17 V2	AL	G812-3363
NP17 V2	WH	G812-3365 ●
NP17 V2	BL	G812-3364 ●
DIFUSORES DIFFUSERS		
C29	65%	G860-0059
C1	65%	G860-0004
C2	80%	G860-0003 ●
C58	75%	G860-0154 ●
C61	80%	G812-3342 ●
TOPOS END CAPS		
E69		G810-2027
E69W		G810-2024 ●
E69B		G810-2023 ●
E114		G812-3353
E114W		G812-3355 ●
E114B		G812-3354 ●
E116		G812-3369
E116W		G812-3371 ●
E116B		G812-3370 ●
ACESSÓRIOS ACCESSORIES		
Z25		G830-1513
Z26		G830-1514
Z27		G830-1515
Z50		G812-3360
Z04		G812-3372

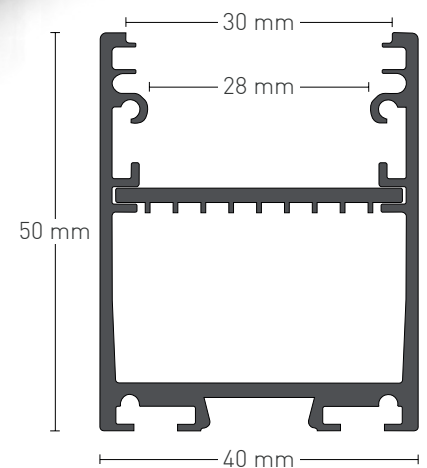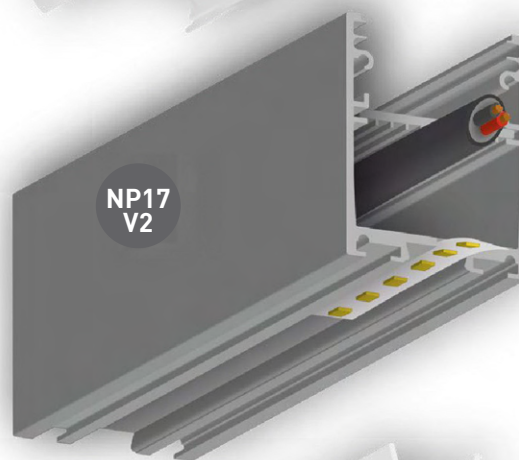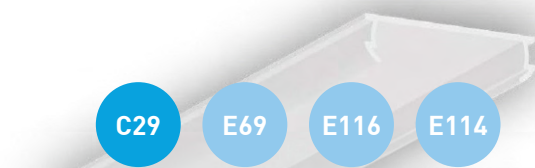

NP20 V2

SALIENTE | SURFACE





20mm
WIDTH MAX.




210g/m
WEIGHT




200cm
LENGTH

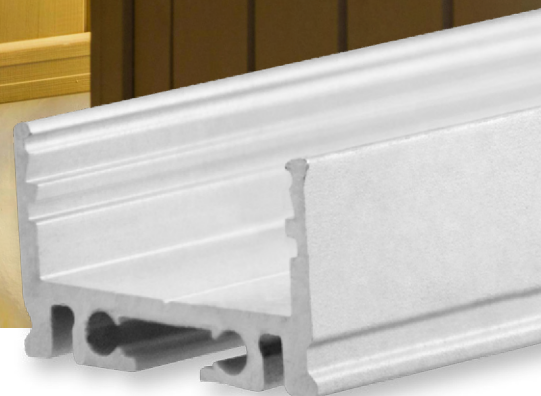


NP20 V2 + C26



NP20 V2 + C26 + LP10





NP20 V2 + C26

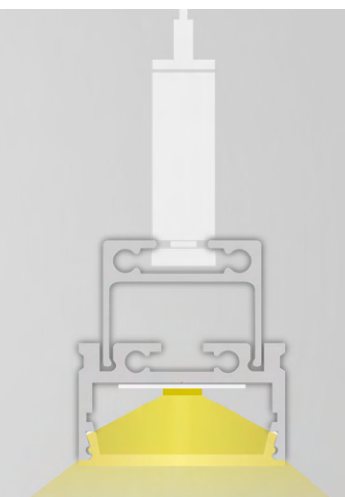

NP20 V2 + C26 + LP10 + Z03

PERFIS PROFILES		
NP20 V2	AL	G810-2210
DIFUSORES DIFFUSERS		
C26	65%	G860-0111
TOPOS END CAPS		
E71		G810-2012
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z05		G830-1501
ACESSÓRIOS ACCESSORIES		
LP10.1		10 cm G810-1085
LP10.1		200 cm G810-1080
Z48		G830-1519
Z49		G830-1520
Z21		G810-2015

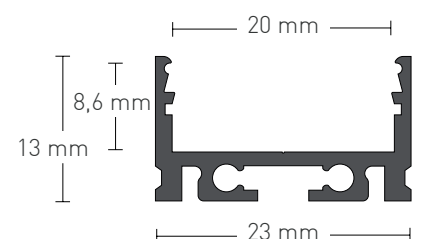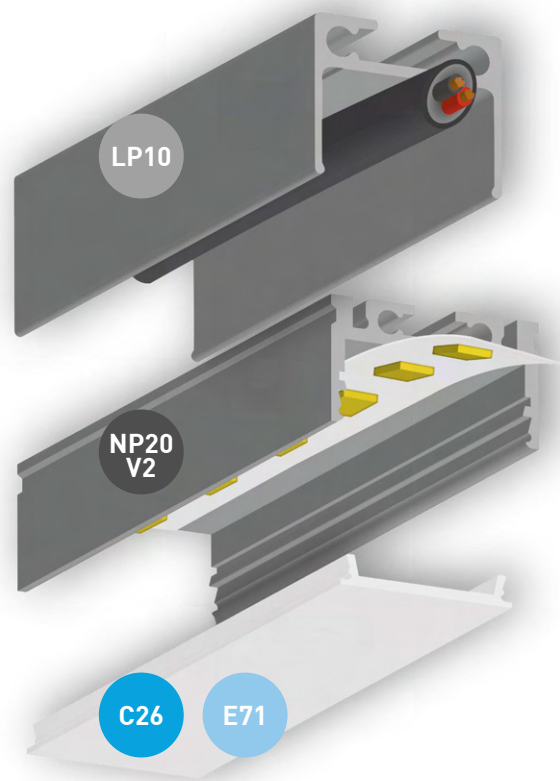

OP13

SALIENTE | SURFACE



FLEXIBLE



15mm
WIDTH MAX.



44g/m
WEIGHT






200cm
LENGTH



OP13 + C22

RAIO CURVATURA
BENDING RADIUS
>40 CM

PERFIS PROFILES		
OP13	AL	G810-1030
DIFUSORES DIFFUSERS		
C22	65%	G860-0054
TOPOS END CAPS		
E60		G810-1035
E61		G810-1036
ACESSÓRIOS ACCESSORIES		
Z19		G810-1037

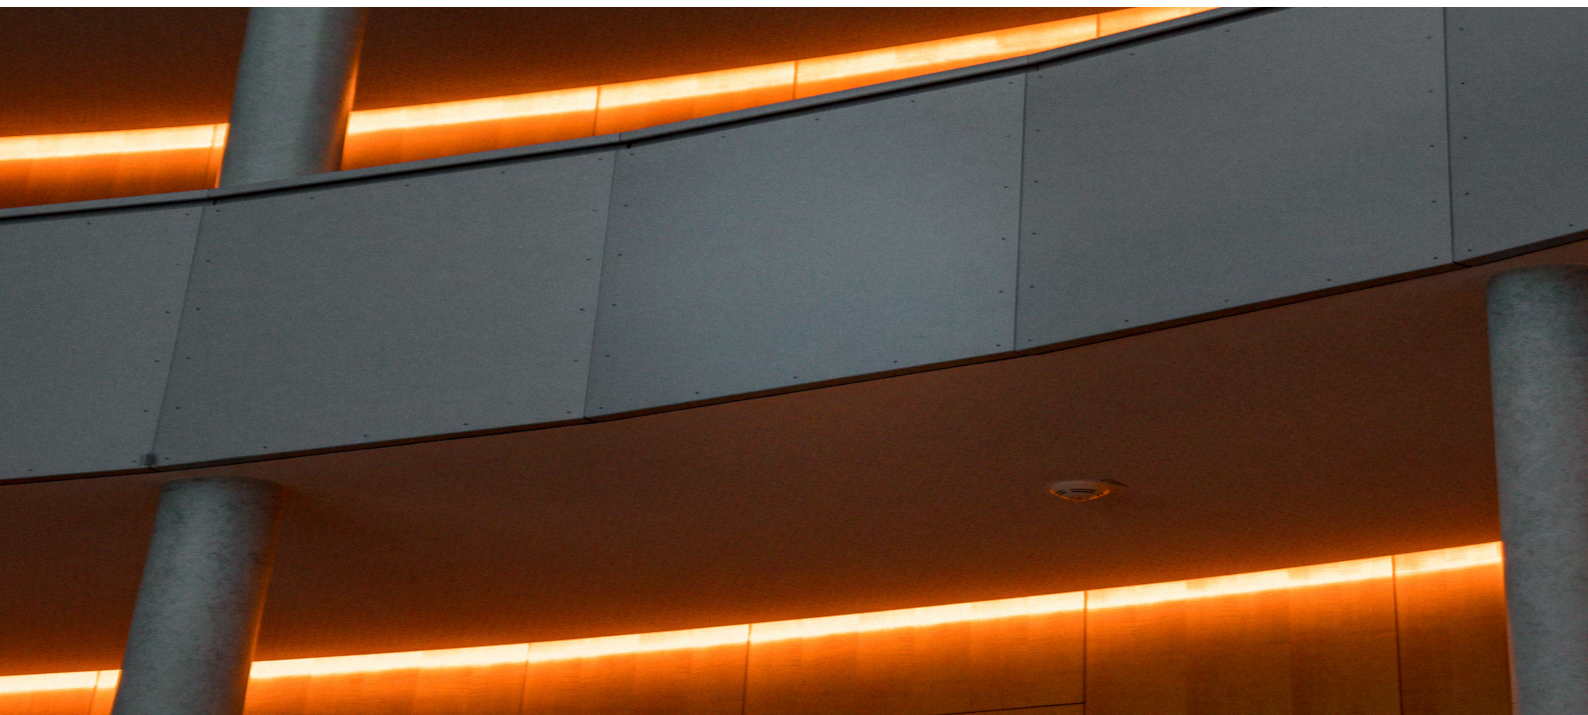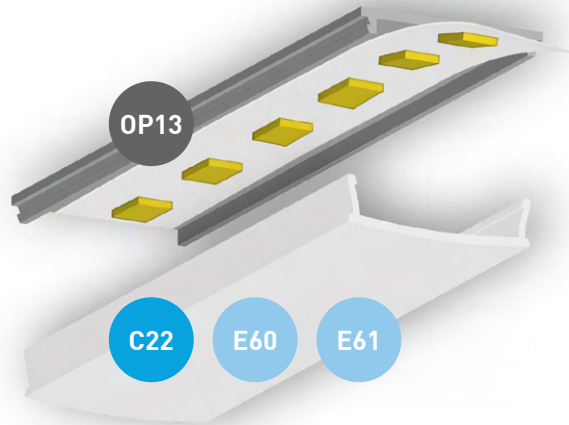

OP14

SALIENTE | SURFACE



FLEXIBLE



12mm
WIDTH MAX.




200cm
LENGTH




OP14 + NP33

BENDABLE
DOBRÁVEL


PERFIS PROFILES		
NP33	AL	G810-5050
DIFUSORES DIFFUSERS		
OP14	65%	G860-0045
TOPOS END CAPS		
E73		G810-1045
E70		G810-1046

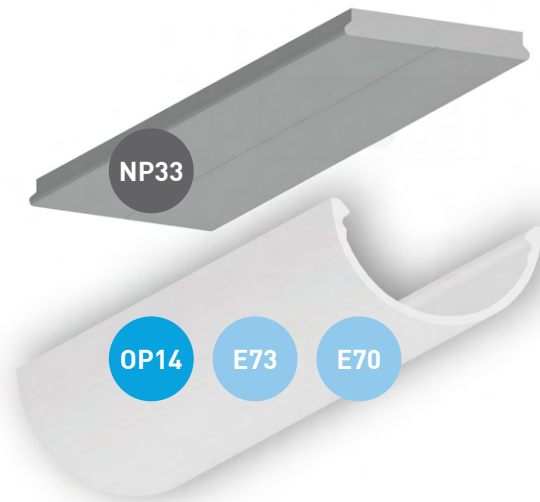


NP33



OP14



OP14 + NP33



OP16

SALIENTE | SURFACE



8mm
WIDTH MAX.



60g/m
WEIGHT



200cm
LENGTH





OP16 + C23



OP16 + C23

PERFIS PROFILES		
OP16	AL	G810-1050
OP16	BL	G810-1051 ●
DIFUSORES DIFFUSERS		
C23	65%	G860-0046
C34	25%	G860-0074 ●
TOPOS END CAPS		
E62		G810-1055
E63		G810-1056
ACESSÓRIOS ACCESSORIES		
Z20		G810-1057

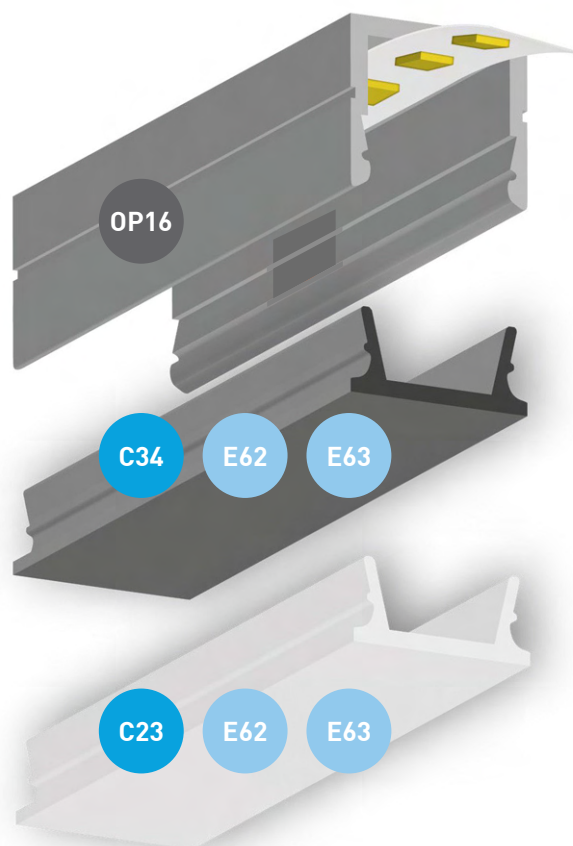

OP17

SALIENTE | SURFACE




11mm
WIDTH MAX.




117g/m
WEIGHT



200cm
LENGTH


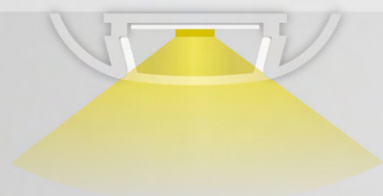


OP17 + C8

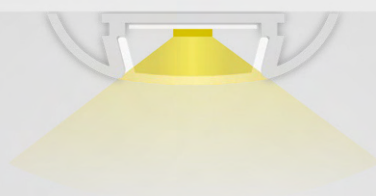

OP17 + C9

PERFIS PROFILES		
OP17	AL	G810-3082
DIFUSORES DIFFUSERS		
C8	65%	G860-0013
C9	85%	G860-0012 ●
C52	25%	G860-0109 ●
TOPOS END CAPS		
E39 		G810-2080
E40 		G810-2082

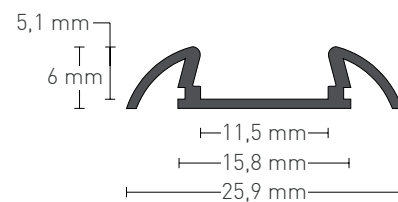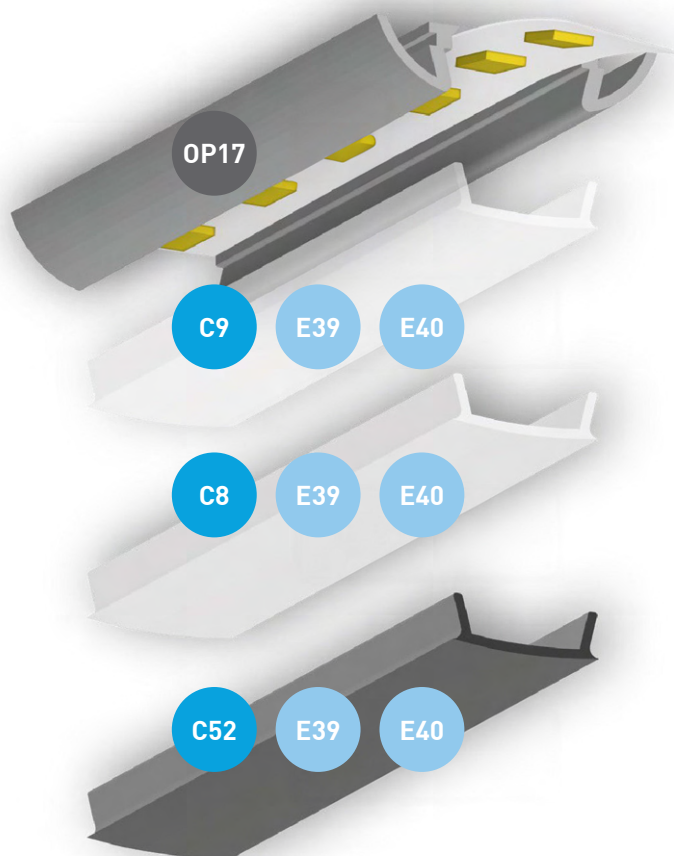

OP18

SALIENTE | SURFACE



6mm
WIDTH MAX.



45g/m
WEIGHT





200cm
LENGTH



OP18 + C24

PERFIS PROFILES		
OP18	AL	G810-1060
OP18	BL	G810-1062 ●
DIFUSORES DIFFUSERS		
C24	65%	G860-0106
TOPOS END CAPS		
E64		G810-1065
E65		G810-1066

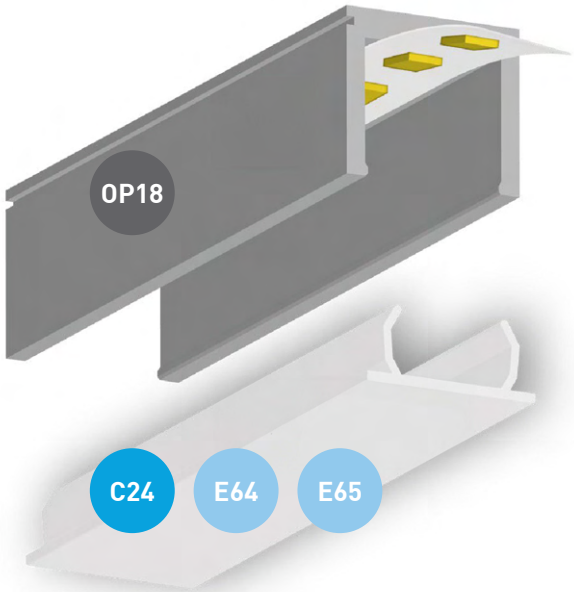

TRIX

SALIENTE | SURFACE



12mm
WIDTH MAX.



93g/m
WEIGHT



200cm
LENGTH





TRIX + C0




TRIX + C0 + E0

PERFIS PROFILES		
TRIX	AL	8010-2002
DIFUSORES DIFFUSERS		
C0		8080-2007
TOPOS END CAPS		
E0		8080-0004
ACESSÓRIOS ACCESSORIES		
Z00		8080-0006

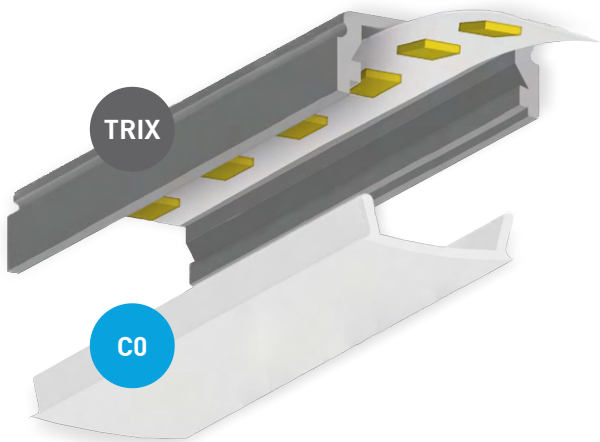

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

ENCASTRAR | RECESSED

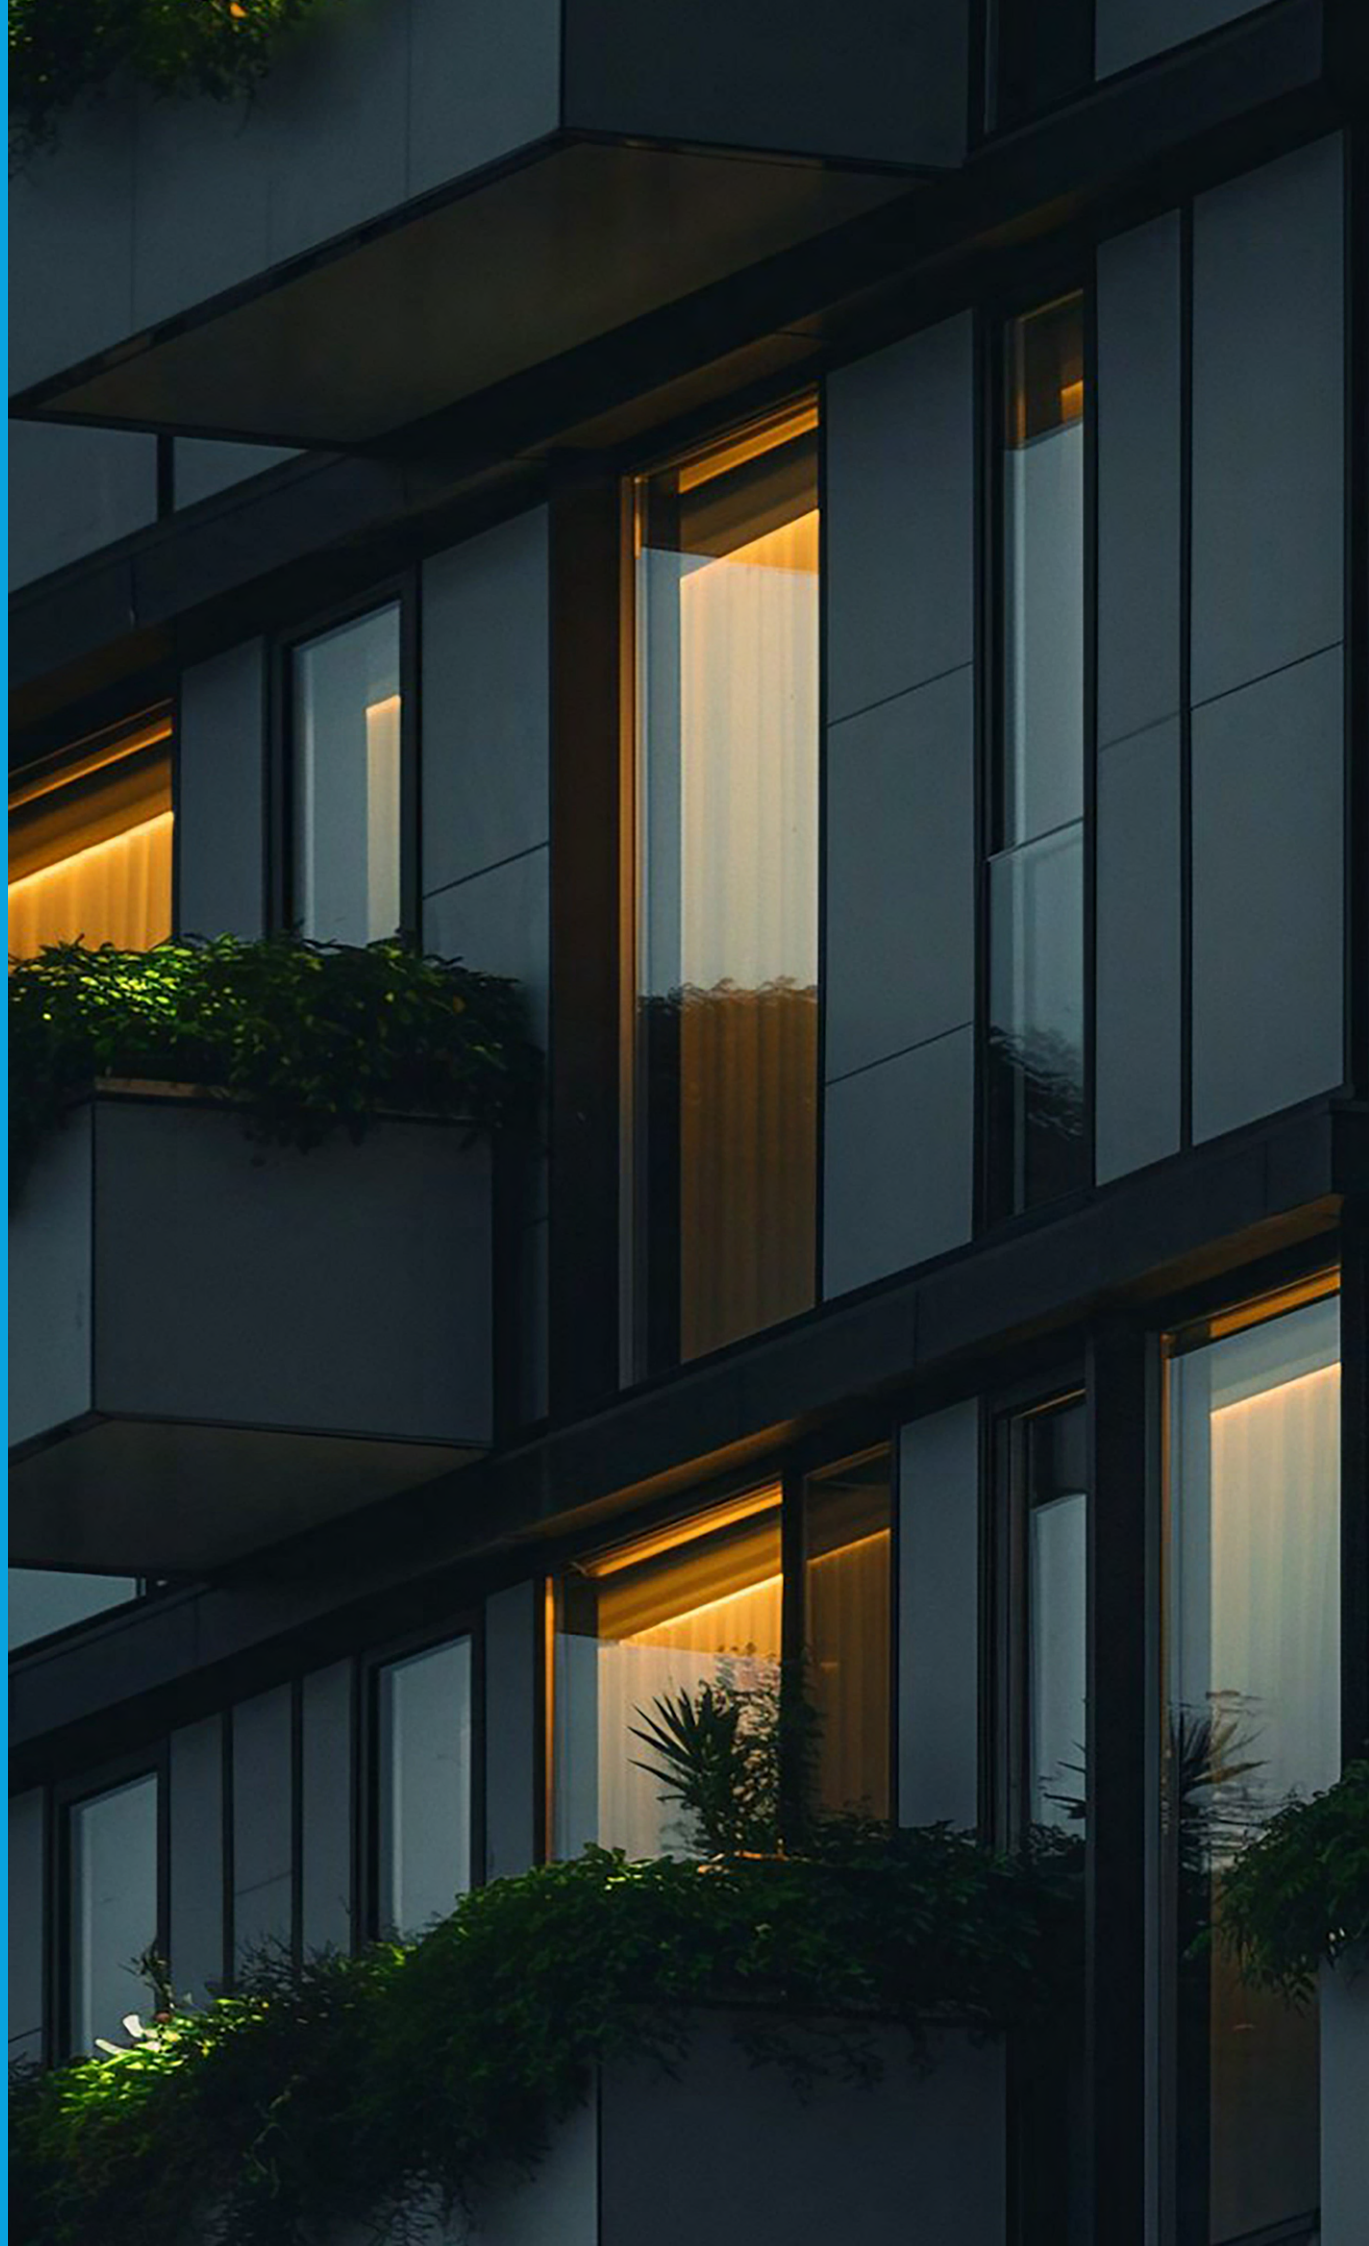



IP03 V2

ENCASTRAR | RECESSED



13mm
WIDTH MAX.



329g/m
WEIGHT




200cm
LENGTH



IP03 V2

IP03 V2	PERFIS PROFILES	
	AL	G810-8001
C56	DIFUSORES DIFFUSERS	
	65%	G860-0133

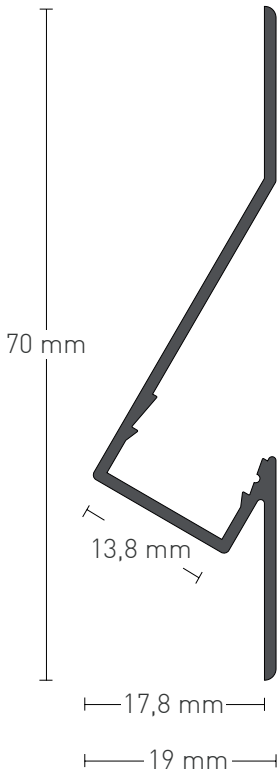

LP03

ENCASTRAR | RECESSED

PERFIS DE ALUMÍNIO

brilumen



12mm
WIDTH MAX.



140g/m
WEIGHT



200cm
LENGTH



LP03 + C32





LP03 + C1 + LP10



LP03 + C2

PERFIS PROFILES		
LP03	AL	G810-6032
LP03	WH	G810-6034 ●
LP03	BL	G810-6033 ●
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E7		G810-6135
E7W		G812-3204 ●
E7B		G812-3203 ●
E8		G810-6030
E8W		G812-3206 ●
E8B		G812-3205 ●
E9		G810-6120
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10		G810-7012
BL1		G812-3334
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z03W		G830-1512 ●
Z03B		G830-1511 ●
Z05		G830-1501
ACESSÓRIOS ACCESSORIES		
Z01		G810-6210
LP10.1	10cm	G810-1085
	200cm	G810-1080

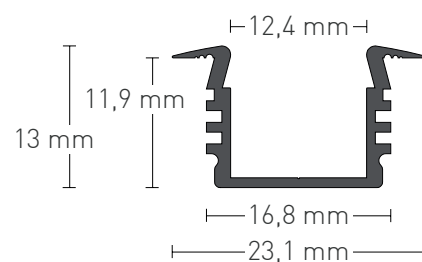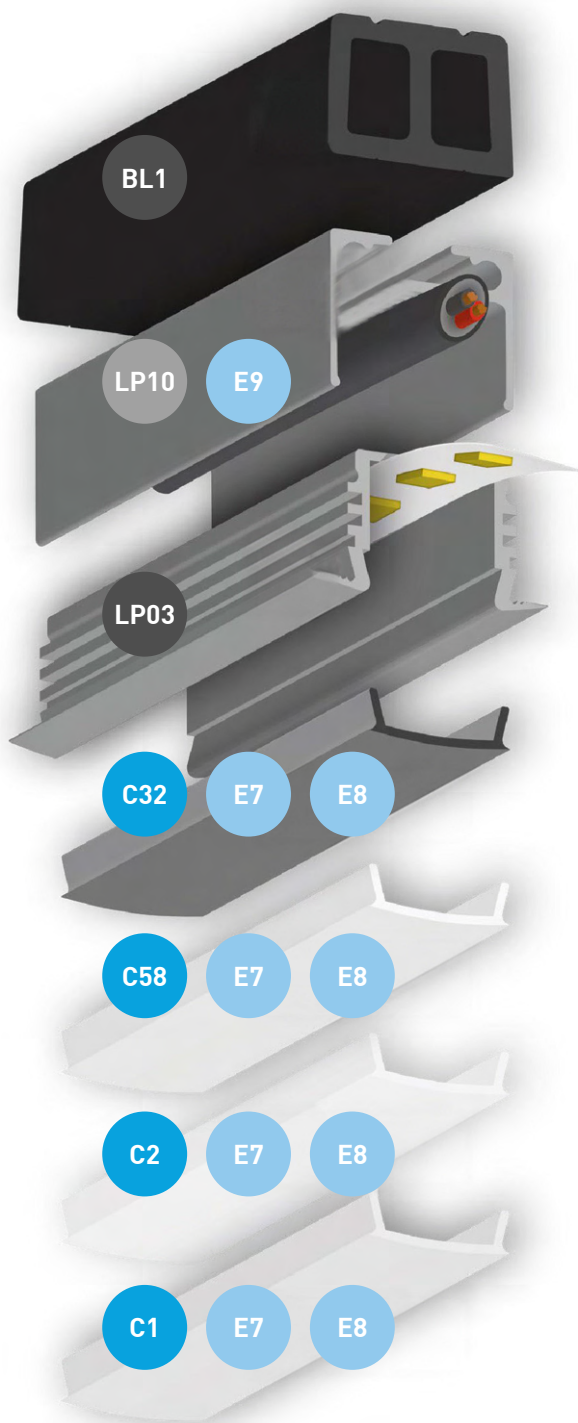

LP08

ENCASTRAR | RECESSED





12mm
WIDTH MAX.




82g/m
WEIGHT




200cm
LENGTH

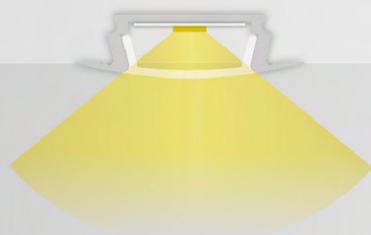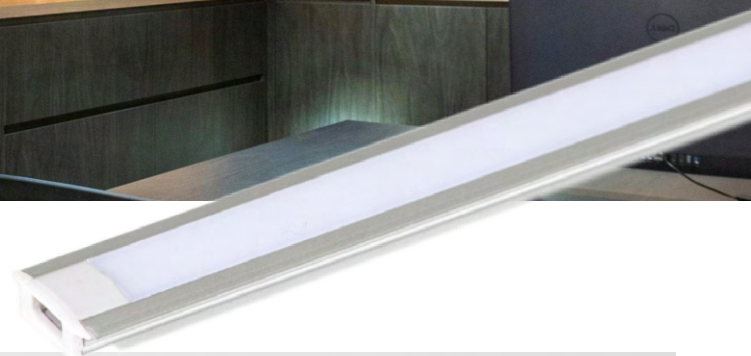

LP08 + C2


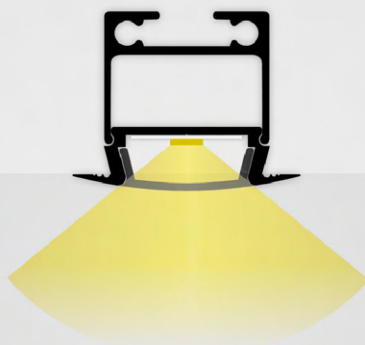


LP08 + LP10 + C32

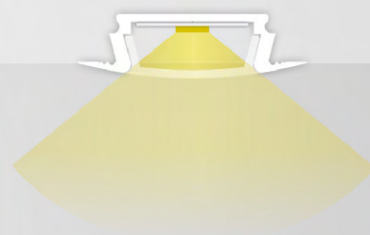

LP08 + C1

PERFIS PROFILES			
LP08	AL	G810-6082	
LP08	WH	G810-6088	●
LP08	BL	G810-6089	●
DIFUSORES DIFFUSERS			
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
TOPOS END CAPS			
E25 E25W E25B		G810-6085 G810-6086 G810-6087	● ● ●
E26 E26W E26B		G810-6080 G810-6083 G810-6084	● ● ●
E27		G810-6045	
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE			
LP10	AL WH BL	G810-7012 G810-7013 G810-7014	● ● ●
Z10		G830-1504	
Z11		G830-1505	
ACESSÓRIOS ACCESSORIES			
Z01	AL WH BL	G810-6210 G810-6212 G810-6211	● ● ●
LP10.1	10cm 200cm	G810-1085 G810-1080	

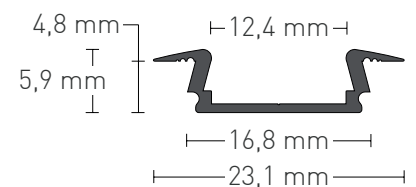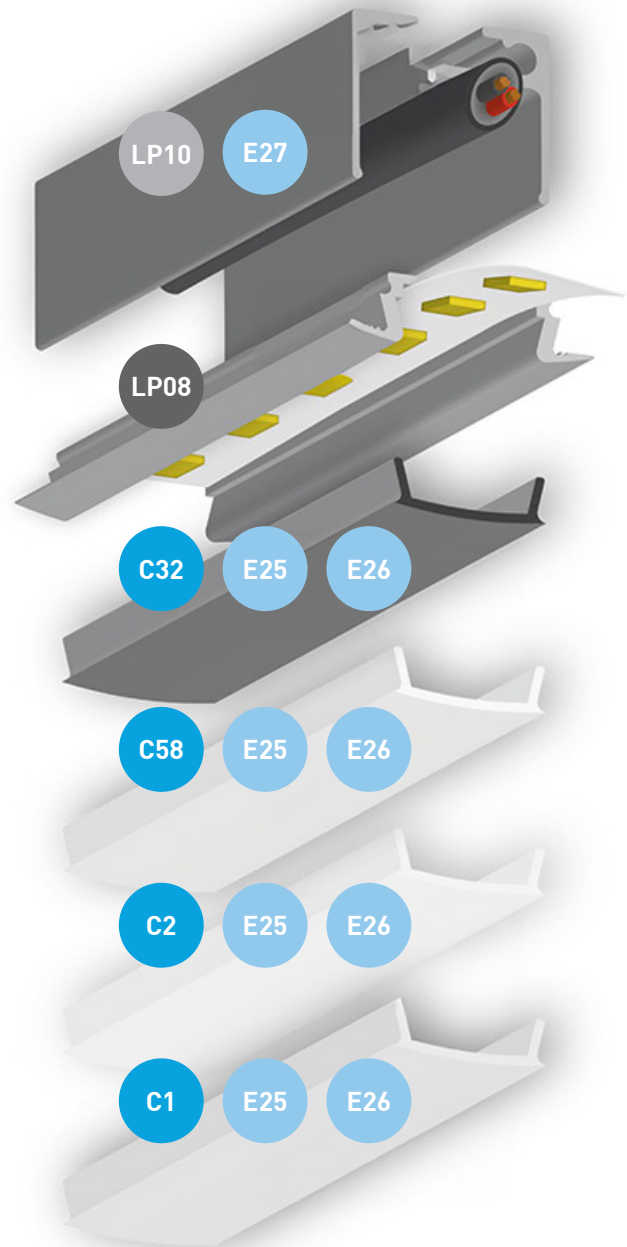

NP05

ENCASTRAR | RECESSED

PERFIS DE ALUMÍNIO

brilumen




22mm
WIDTH MAX.



236g/m
WEIGHT



200cm
LENGTH

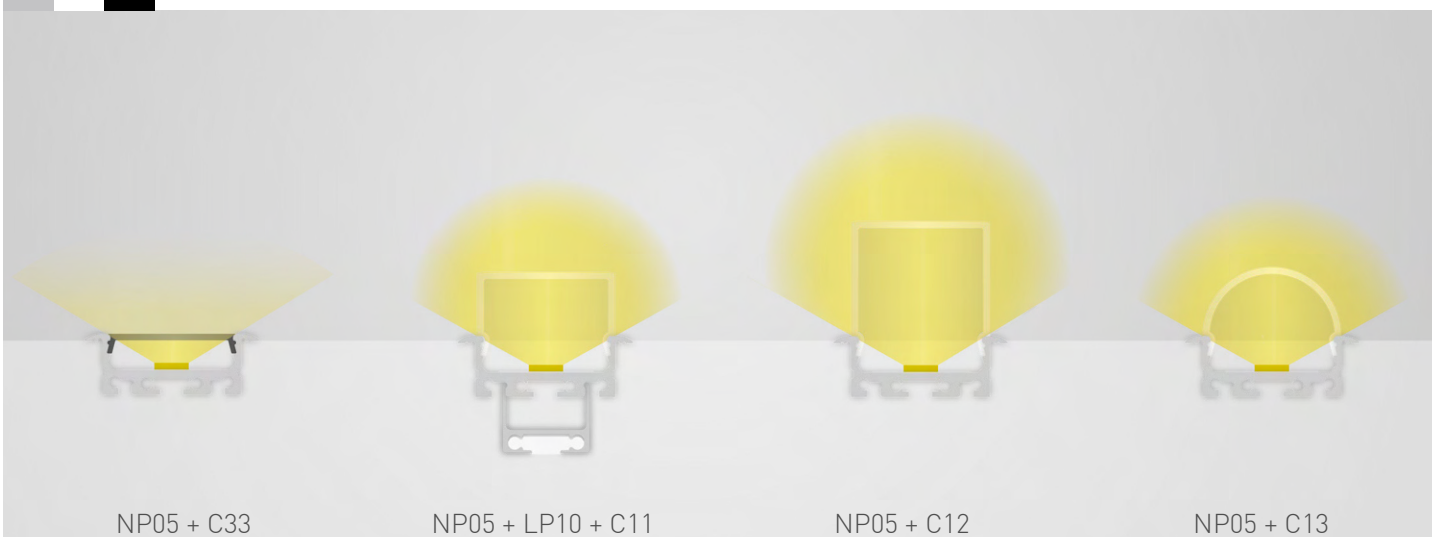


NP05 + C33

NP05 + LP10 + C11

NP05 + C12

NP05 + C13

PERFIS PROFILES		
NP05	AL	G820-6012
NP05	WH	G820-6014 ●
NP05	BL	G820-6013 ●
DIFUSORES DIFFUSERS		
C30	65%	G860-0077 ●
C47	75%	G860-0099 ●
C10	65%	G860-0017
C19	75%	G860-0036 ●
C36	75%	G860-0078 ●
C18	85%	G860-0035 ●
C33	25%	G860-0072 ●
C11	65%	G860-0018
C35	85%	G860-0063 ●
C12	65%	G860-0019
C31	85%	G860-0068 ●
C13	65%	G860-0020
TOPOS END CAPS		
E43		G820-1011
E43W		G820-1015 ●
E43B		G820-1016 ●
E44		G820-2011
E44W		G820-2012 ●
E44B		G820-2013 ●
E45		G820-3011
E45W		G820-3012 ●
E45B		G820-3013 ●
E46		G820-4011
E46W		G820-4012 ●
E46B		G820-4013 ●
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
	WH	G810-7013 ●
	BL	G810-7014 ●
Z10		G830-1504
Z11		G830-1505
ACESSÓRIOS ACCESSORIES		
LP10.1	10 cm	G810-1085
LP10.1	200 cm	G810-1080
Z24		G830-1510
Z45		G830-1517
Z46		G830-1518
Z44		G830-4038

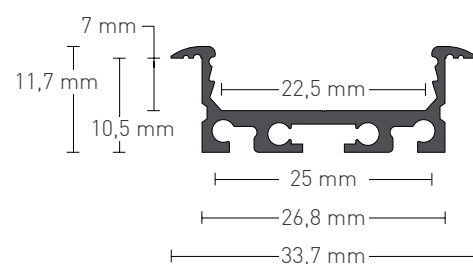

● Sob consulta | Under request

NP07 V2

ENCASTRAR | RECESSED




20mm
WIDTH MAX.




352g/m
WEIGHT



200cm
LENGTH



NP07 V2 + C10

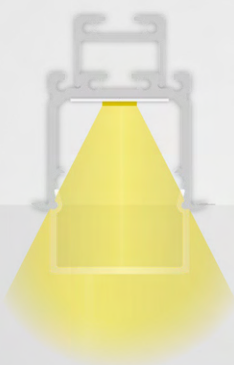

NP07 V2 + LP10 + C11





NP07 V2 + C12



NP07 V2 + C13

PERFIS PROFILES		
NP07 V2	AL	G830-5015
NP07 V2	WH	G830-5016 ●
NP07 V2	BL	G830-5017 ●
DIFUSORES DIFFUSERS		
C30	65%	G860-0077 ●
C47	75%	G860-0099 ●
C10	65%	G860-0017
C19	75%	G860-0036 ●
C36	75%	G860-0078 ●
C18	85%	G860-0035 ●
C33	25%	G860-0072 ●
C11	65%	G860-0018
C35	85%	G860-0063 ●
C12	65%	G860-0019
C31	85%	G860-0068 ●
C13	65%	G860-0020
TOPOS END CAPS		
E47		G830-1011
E47W		G830-1015 ●
E47B		G830-1016 ●
E48		G830-2011
E48W		G830-2012 ●
E48B		G830-2013 ●
E49		G830-3011
E49W		G830-3012 ●
E49B		G830-3013 ●
E50		G830-4011
E50W		G830-4012 ●
E50B		G830-4013 ●
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
	WH	G810-7013 ●
	BL	G810-7014 ●
Z10		G830-1504
Z11		G830-1505
ACESSÓRIOS ACCESSORIES		
LP10.1	10 cm	G810-1085
LP10.1	200 cm	G810-1080
Z24		G830-1510
Z45		G830-1517
Z46		G830-1518
Z44		G830-4038

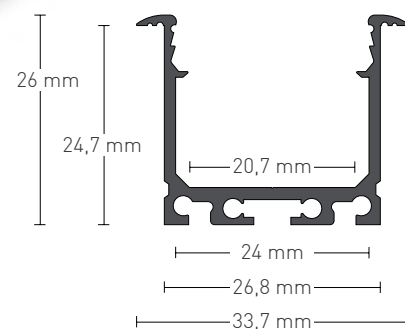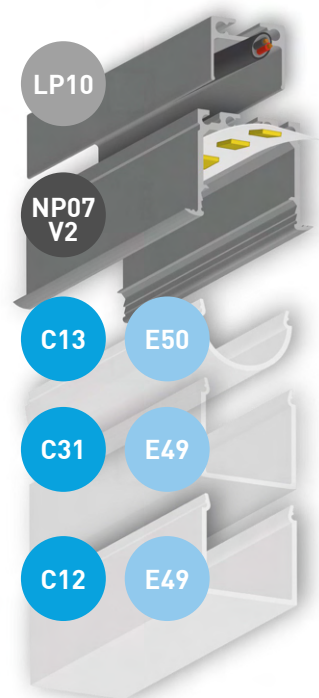

● Sob consulta | Under request

NP21

ENCASTRAR | RECESSED




20mm
WIDTH MAX.




300g/m
WEIGHT



200cm
LENGTH





NP21 + C26



NP21 + LP10 + C26

PERFIS PROFILES		
NP21	AL	G810-2211
DIFUSORES DIFFUSERS		
C26	65%	G860-0111
TOPOS END CAPS		
E72		G810-2013
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE		
LP10	AL	G810-7012
Z10		G830-1504
Z11		G830-1505
ACESSÓRIOS ACCESSORIES		
LP10.1		10 cm G810-1085
LP10.1		200 cm G810-1080
Z48		G830-1519
Z49		G830-1520
Z21		G810-2015
Z44		G830-4038

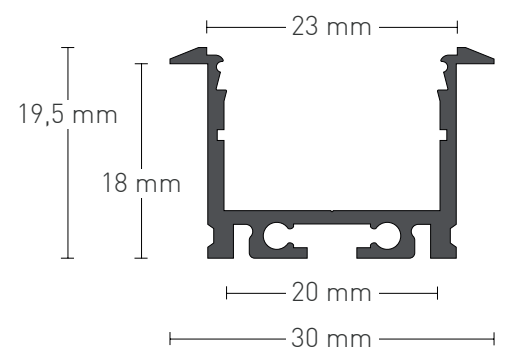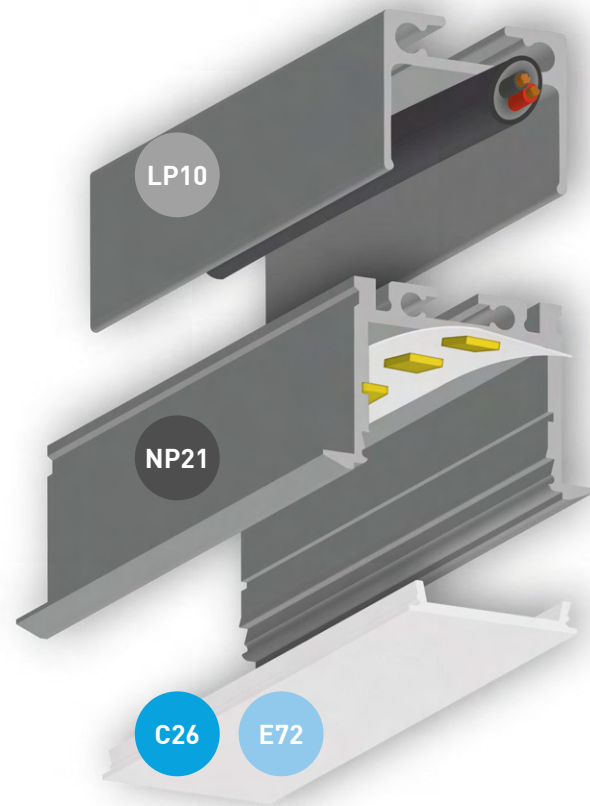

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

MONTAGEM | MOUNTING





LP10

MONTAGEM | MOUNTING

PERFIS DE ALUMÍNIO

brilum




131g/m
WEIGHT




200cm
LENGTH




LP02 + LP10 + C1

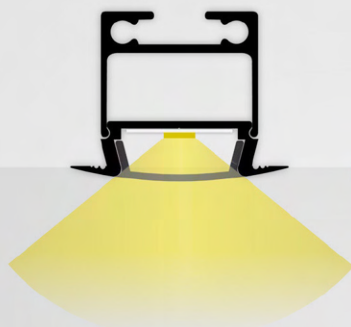

LP08 + LP10 + C32


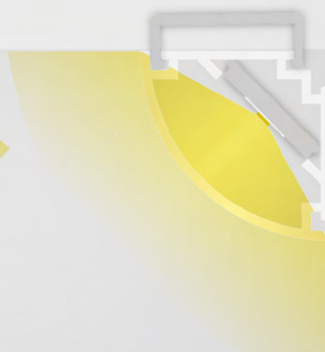


NP10 + NP33 + LP10.1

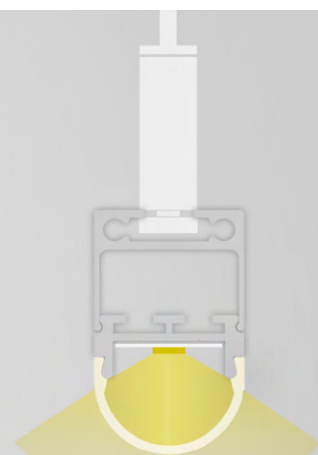

LP06 + LP10 + C5 + Z03

PERFIS PROFILES		
LP10	AL	G810-7012
LP10	WH	G810-7013 ●
LP10	BL	G810-7014 ●
ACESSÓRIOS ACCESSORIES		
Z10		G830-1504
Z11		G830-1505
Z03		G830-1502
Z03W		G830-1512 ●
Z03B		G830-1511 ●
Z05		G830-1501

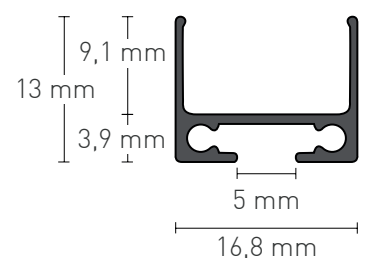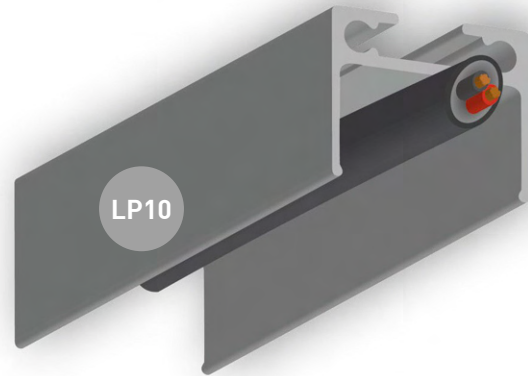

● Sob consulta | Under request

LP10.1

MONTAGEM | MOUNTING

PERFIS DE ALUMÍNIO


brilumen





70g/m
WEIGHT



200cm
LENGTH

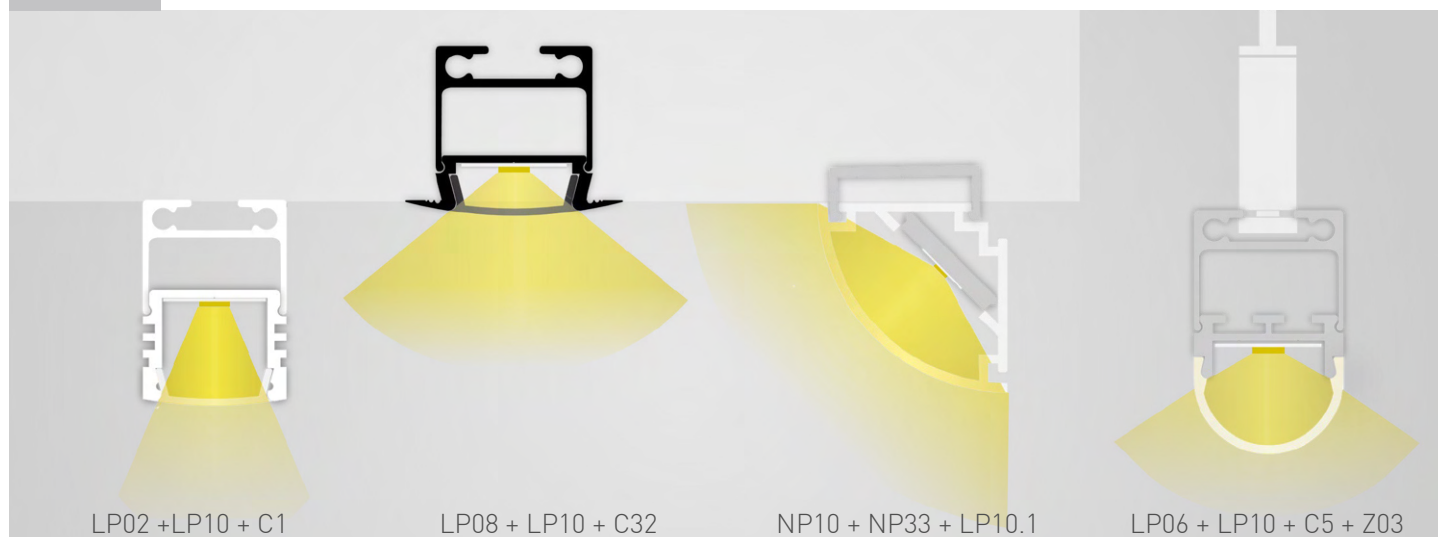

LP10.1	PERFIS PROFILES 200cm G810-1080
LP10.1 10cm	ACESSÓRIOS ACCESSORIES 10cm G810-1085

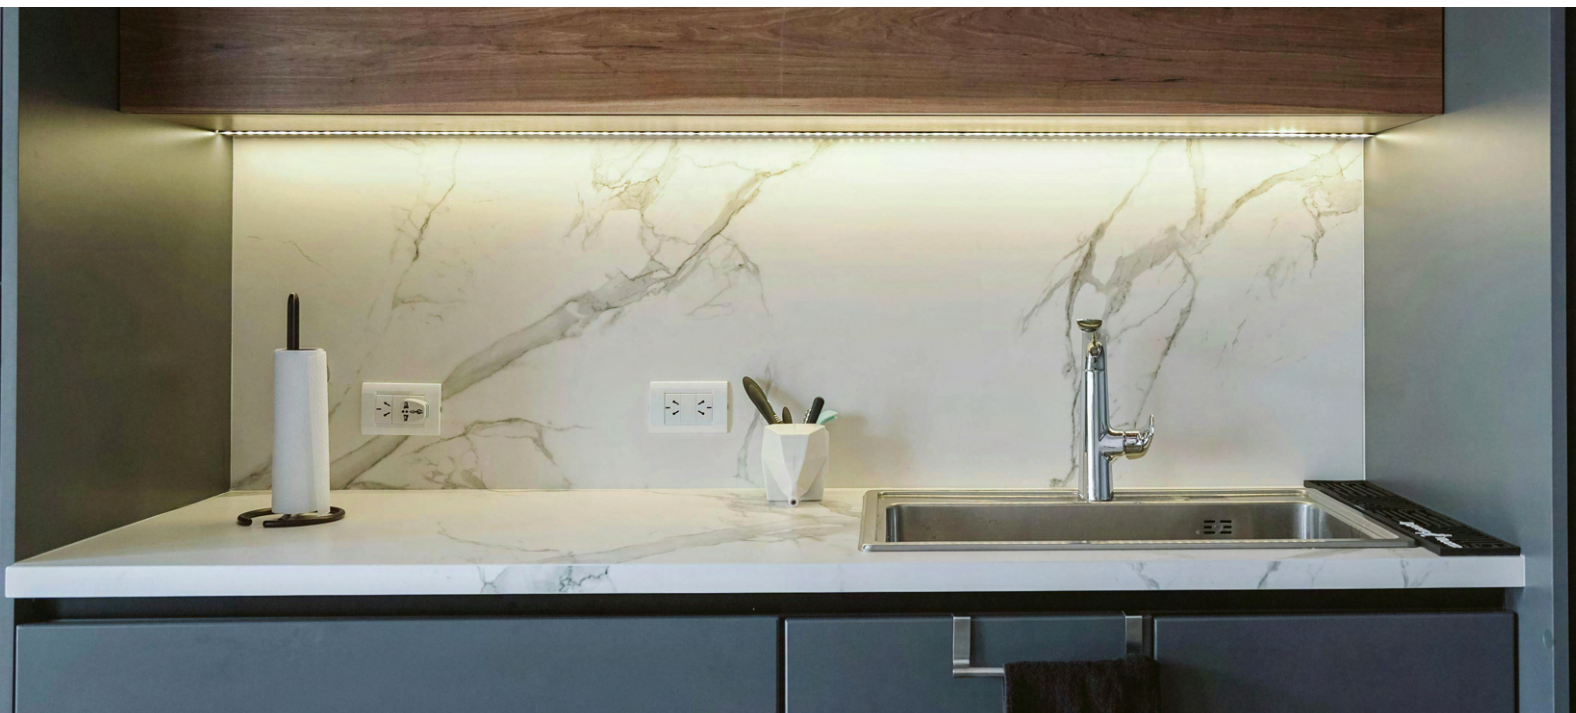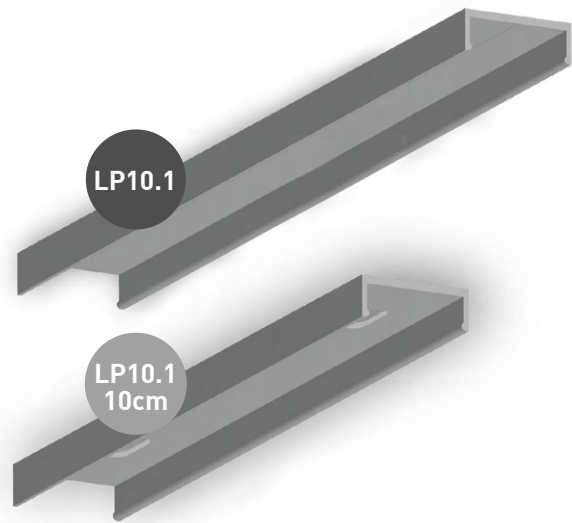

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

CANTO | CORNER





LN10

CANTO | CORNER



10mm
WIDTH MAX.



57g/m
WEIGHT







200cm
LENGTH



LN10 + C49

PERFIS PROFILES		
LN10	AL	G812-1400
DIFUSORES DIFFUSERS		
C49	65%	G860-0101
TOPOS END CAPS		
E87		G812-1450
E88		G812-1451
ACESSÓRIOS ACCESSORIES		
Z38		G812-1460

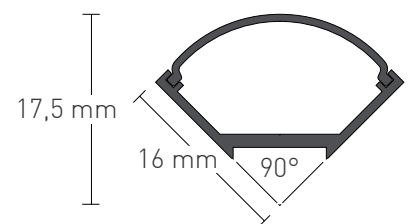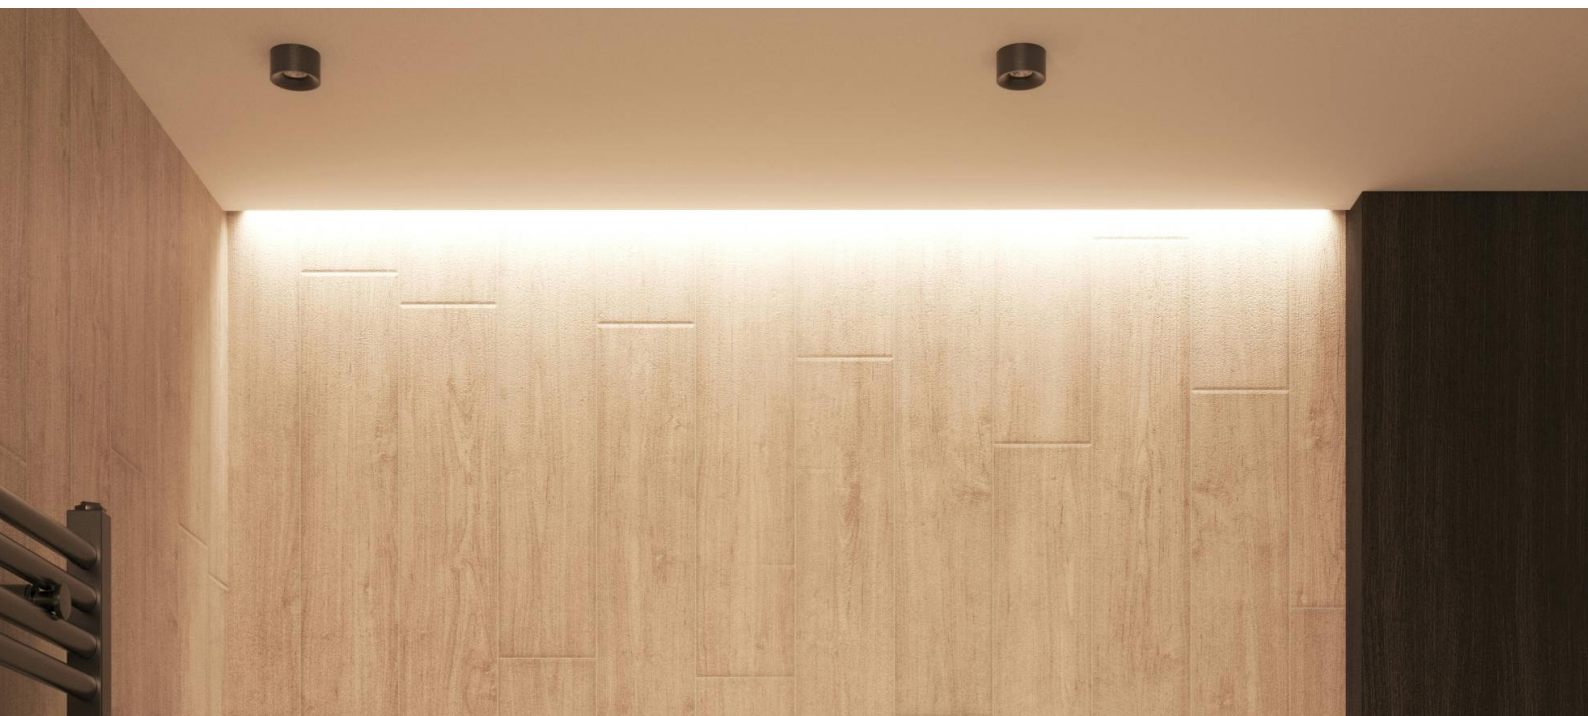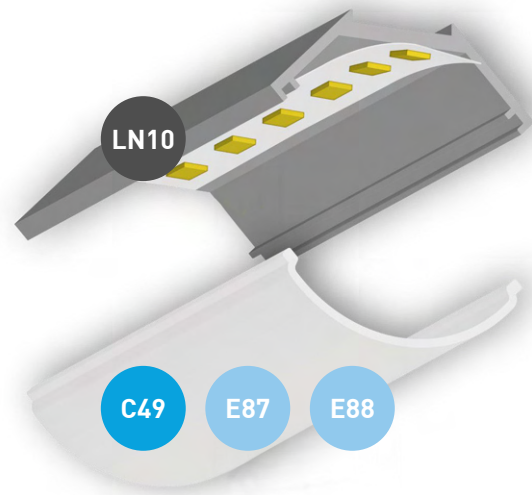

NP10

CANTO | CORNER



13mm
WIDTH MAX.




77g/m
WEIGHT



200cm
LENGTH



NP10 + NP33


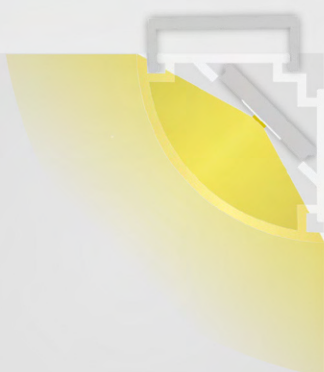


NP10 + NP33 + LP10.1



NP10 + NP33 + LP10

PERFIS PROFILES		
NP33	AL	G810-5050
DIFUSORES DIFFUSERS		
NP10	65%	G860-0043
TOPOS END CAPS		
E67		G810-1075
E68		G810-1076
ACESSÓRIOS ACCESSORIES		
LP10.1		10 cm
		200 cm
LP10	AL	G810-7012
	WH	G810-7013 ●
	BL	G810-7014 ●

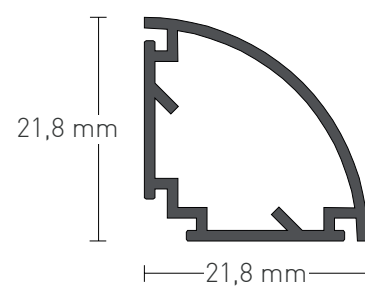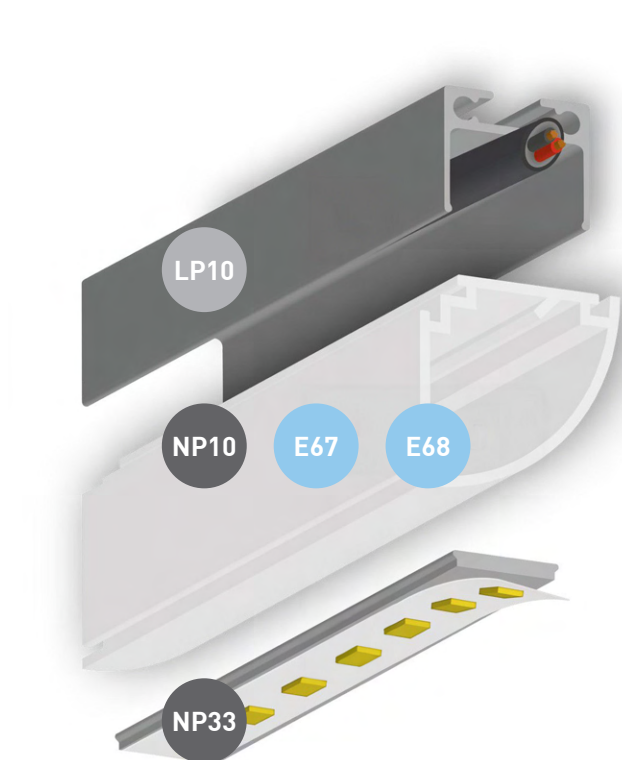

NP19 V3

CANTO | CORNER



20mm
WIDTH MAX.




496g/m
WEIGHT



200cm
LENGTH





NP19 V3 + C16



NP19 V3 + C17

PERFIS PROFILES		
NP19 V3	AL	G812-3359
DIFUSORES DIFFUSERS		
C16	65%	G860-0023
C17	65%	G860-0024
TOPOS END CAPS		
E52	C16	G810-6075
E55	C17	G810-6077
ACESSÓRIOS ACCESSORIES		
Z10		G830-1504
Z11		G830-1505
Z50		G812-3360

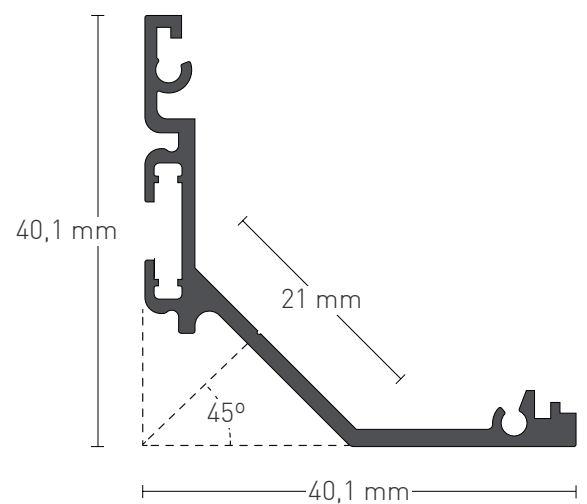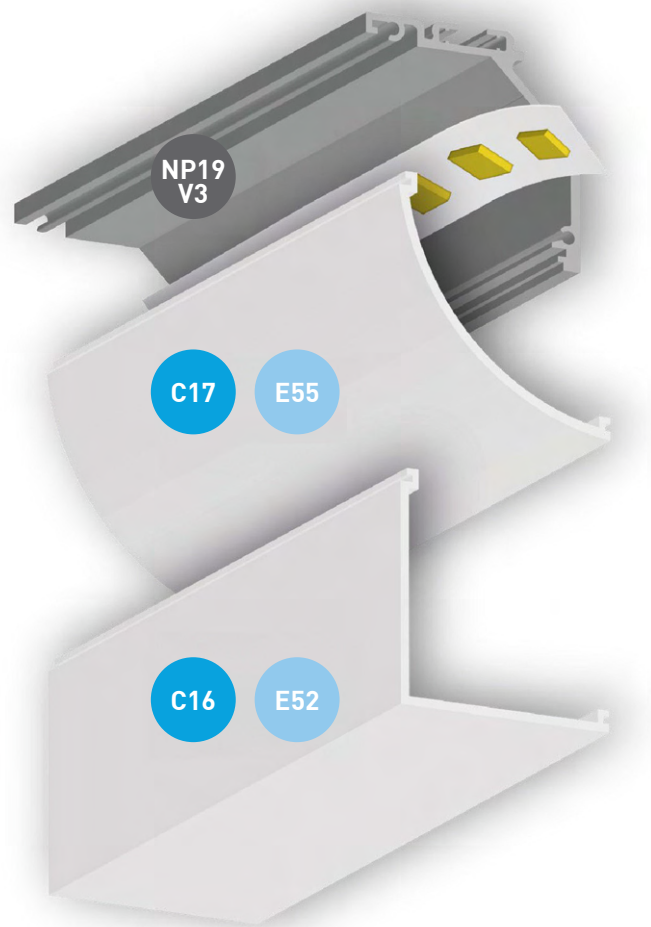

OP05

CANTO | CORNER



12mm
WIDTH MAX.



107g/m
WEIGHT






200cm
LENGTH



OP05 + C45

PERFIS PROFILES		
OP05	AL	G812-3100
DIFUSORES DIFFUSERS		
C45	65%	G860-0097
C46	75%	G860-0098 ●
TOPOS END CAPS		
E84		G812-3150

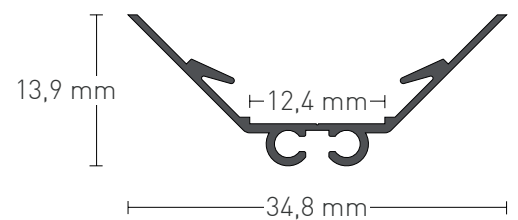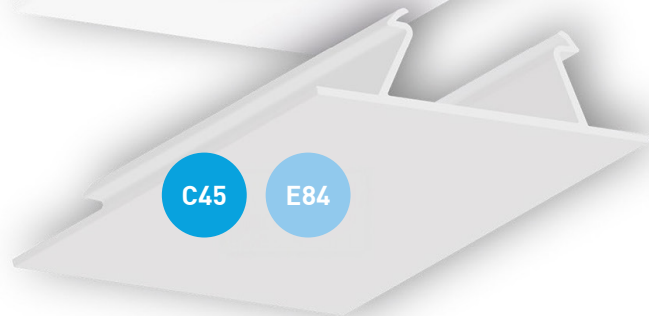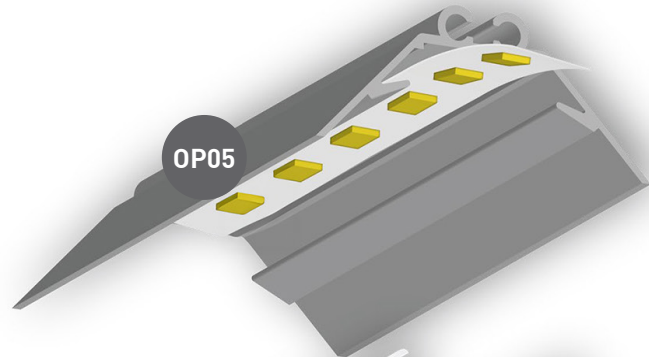

OP23 V2

CANTO | CORNER




11mm
WIDTH MAX.



129g/m
WEIGHT



200cm
LENGTH



OP23 V2 + C54





OP23 V2 + C55



OP23 V2 + C55

PERFIS PROFILES		
OP23V2	AL	G810-4060
OP23V2	WH	G810-4062 ●
OP23V2	BL	G810-4064 ●
DIFUSORES DIFFUSERS		
C54	65%	G860-0119
C55	85%	G860-0120 ●
TOPOS END CAPS		
E96		G810-4070
E96W		G810-4072 ●
E96B		G810-4074 ●
E97		G810-4071
E97W		G810-4073 ●
E97B		G810-4075 ●
ACESSÓRIOS ACCESSORIES		
Z02		G810-4050
Z47		AL G830-4039
		WH G830-4041 ●
		BL G830-4040 ●

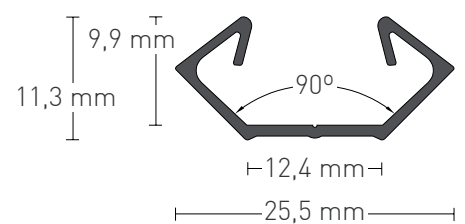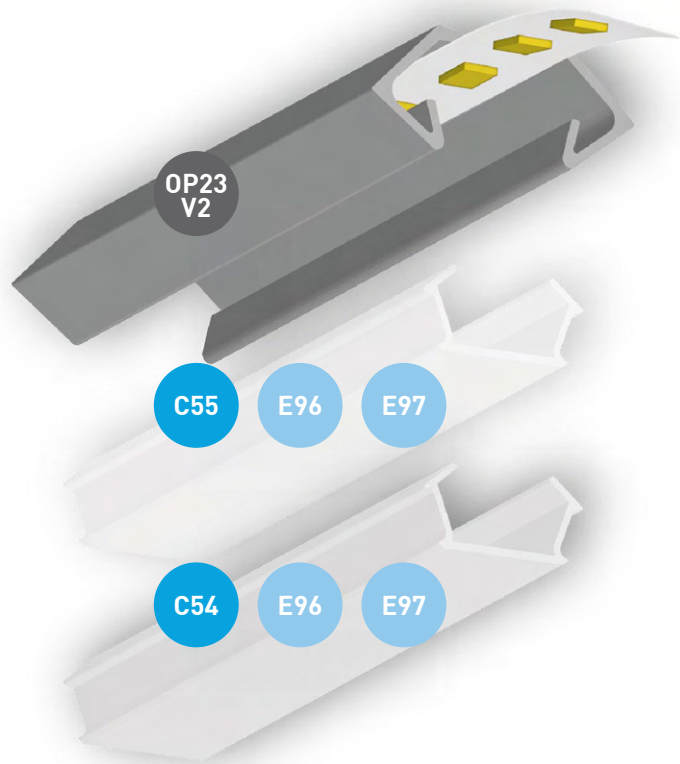

PW01

CANTO | CORNER

PERFIS DE ALUMÍNIO

brilumen




18mm
WIDTH MAX.





186g/m
WEIGHT



200cm
LENGTH

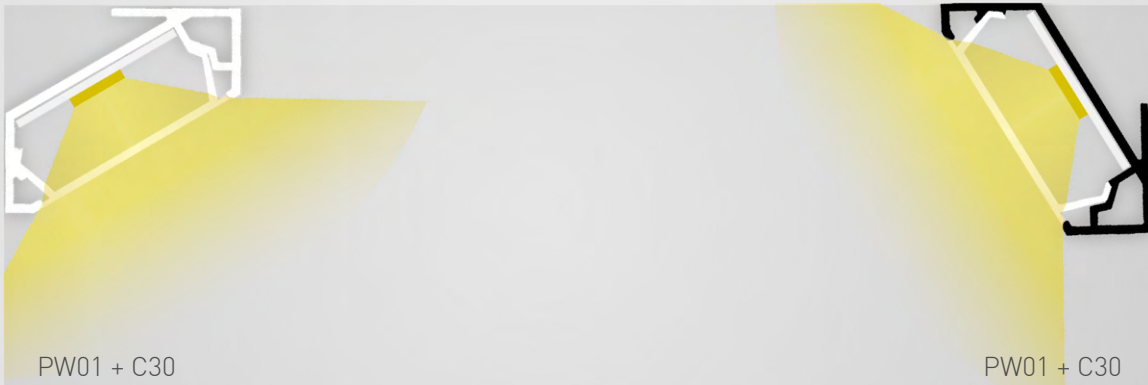

PERFIS PROFILES			
PW01	WH	G810-2085	●
PW01	BL	G810-2084	●
DIFUSORES DIFFUSERS			
C30	65%	G860-0077	
C47	75%	G860-0099	●
TOPOS END CAPS			
E110	L-W	G830-4015	●
	L-B	G830-4016	●
	R-W	G830-4043	●
	R-B	G830-4044	●
E111	L-W	G830-4017	●
	L-B	G830-4018	●
	R-W	G830-4045	●
	R-B	G830-4046	●

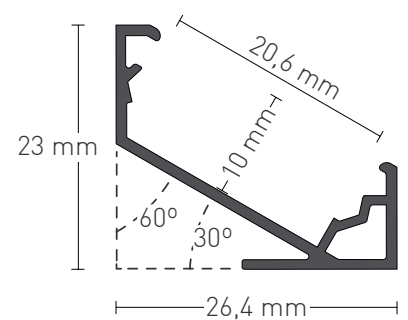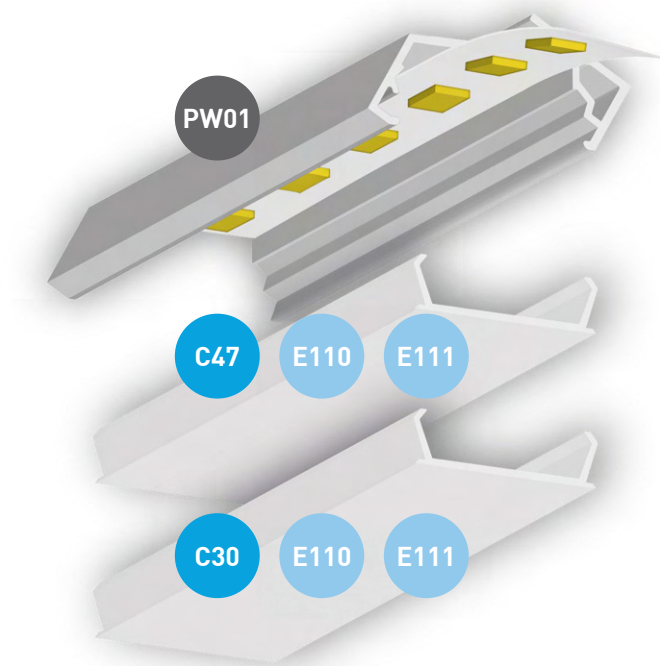

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES
INDIRETO | INDIRECT





AV02

INDIRETO | INDIRECT

PERFIS DE ALUMÍNIO



16mm
WIDTH MAX.



563g/m
WEIGHT



200cm
LENGTH





AV02 + C51 + Z36



AV02 + C51 + Z36

PERFIS PROFILES		
AV02	AL	G812-3154
AV02	WH	G812-3156 ●
AV02	BL	G812-3155 ●
DIFUSORES DIFFUSERS		
C50	65%	G860-0104
C51	85%	G860-0105 ●
TOPOS END CAPS		
E90		G812-3183
E90W		G812-3185 ●
E90B		G812-3184 ●
ACESSÓRIOS ACCESSORIES		
Z36		G812-3201

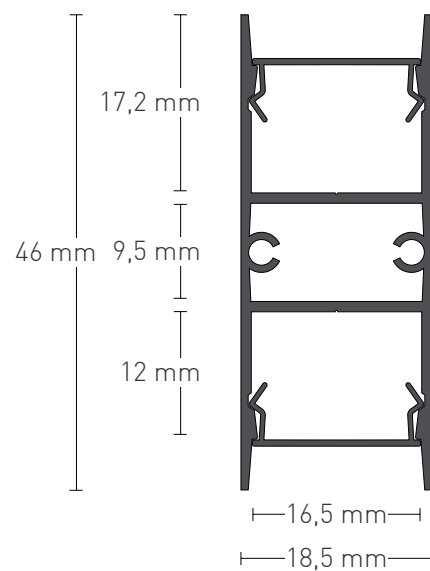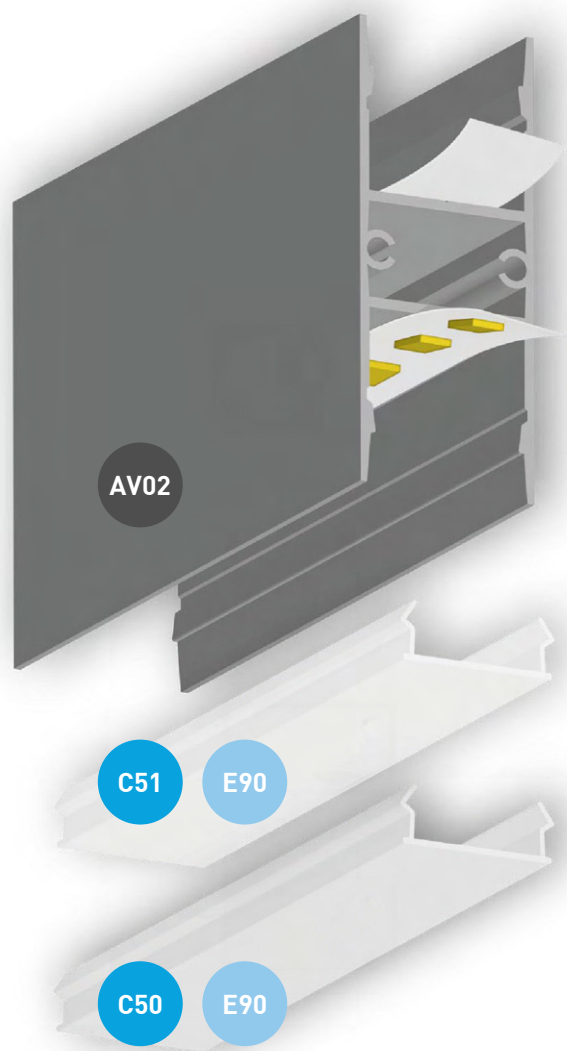

AV03

INDIRETO | INDIRECT

PERFIS DE ALUMÍNIO



16mm
WIDTH MAX.



622g/m
WEIGHT



200cm
LENGTH




AV03 + C50

AV03 + C50

AV03 + C50

PERFIS PROFILES		
AV03	AL	G812-3157
AV03	WH	G812-3159 ●
AV03	BL	G812-3158 ●
DIFUSORES DIFFUSERS		
C50	65%	G860-0104
C51	85%	G860-0105 ●
TOPOS END CAPS		
E91		G812-3186
E91W		G812-3188 ●
E91B		G812-3187 ●
ACESSÓRIOS ACCESSORIES		
Z35		G812-3200
Z51		G812-3362
Z10		G830-1504
Z11		G830-1505

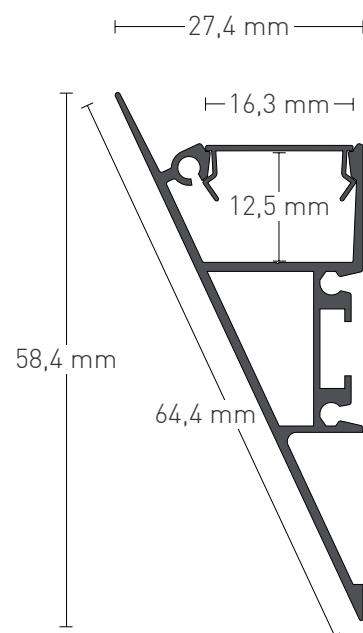

AV04

INDIRETO | INDIRECT



16/14mm
WIDTH MAX.



615g/m
WEIGHT



200cm
LENGTH



AV04 + C50




AV04 + C50



AV04 + C50

PERFIS PROFILES		
AV04	AL	G812-3160
AV04	WH	G812-3162 ●
AV04	BL	G812-3161 ●
DIFUSORES DIFFUSERS		
C50	65%	G860-0104
C51	85%	G860-0105 ●
TOPOS END CAPS		
E92		G812-3189
E92W		G812-3191 ●
E92B		G812-3190 ●
ACESSÓRIOS ACCESSORIES		
Z35		G812-3200
Z51		G812-3362
Z10		G830-1504
Z11		G830-1505

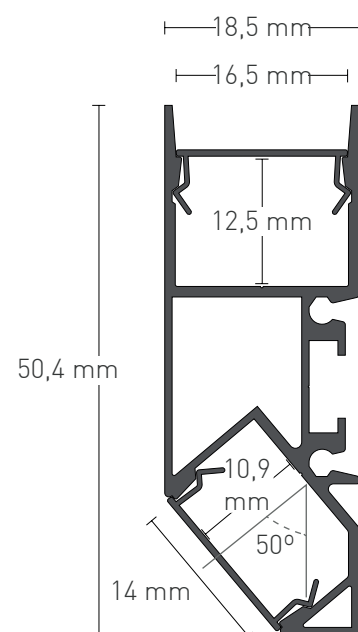

AV05

INDIRETO | INDIRECT



16mm
WIDTH MAX.



763g/m
WEIGHT



200cm
LENGTH



AV05 + C50





AV05 + C50



AV05 + C50

PERFIS PROFILES		
AV05	AL	G812-3163
AV05	WH	G812-3165 ●
AV05	BL	G812-3164 ●
DIFUSORES DIFFUSERS		
C50	65%	G860-0104
C51	85%	G860-0105 ●
TOPOS END CAPS		
E93		G812-3192
E93W		G812-3194 ●
E93B		G812-3193 ●
ACESSÓRIOS ACCESSORIES		
Z35		G812-3200
Z51		G812-3362
Z10		G830-1504
Z11		G830-1505

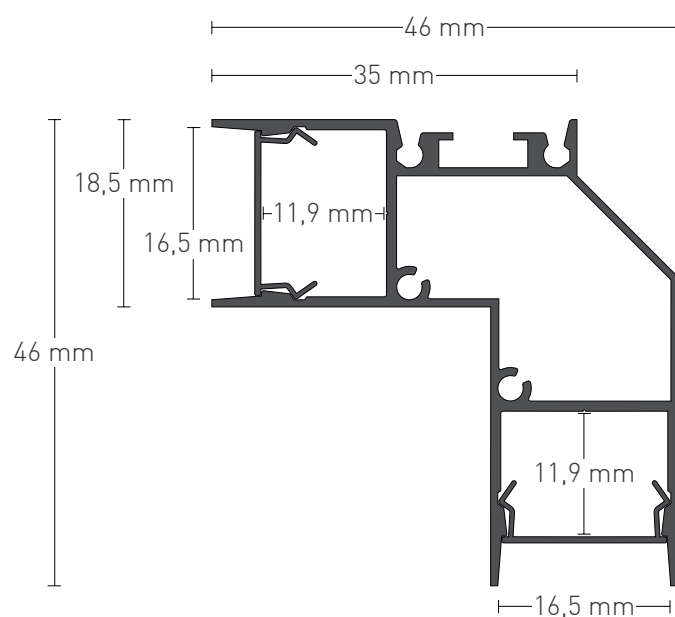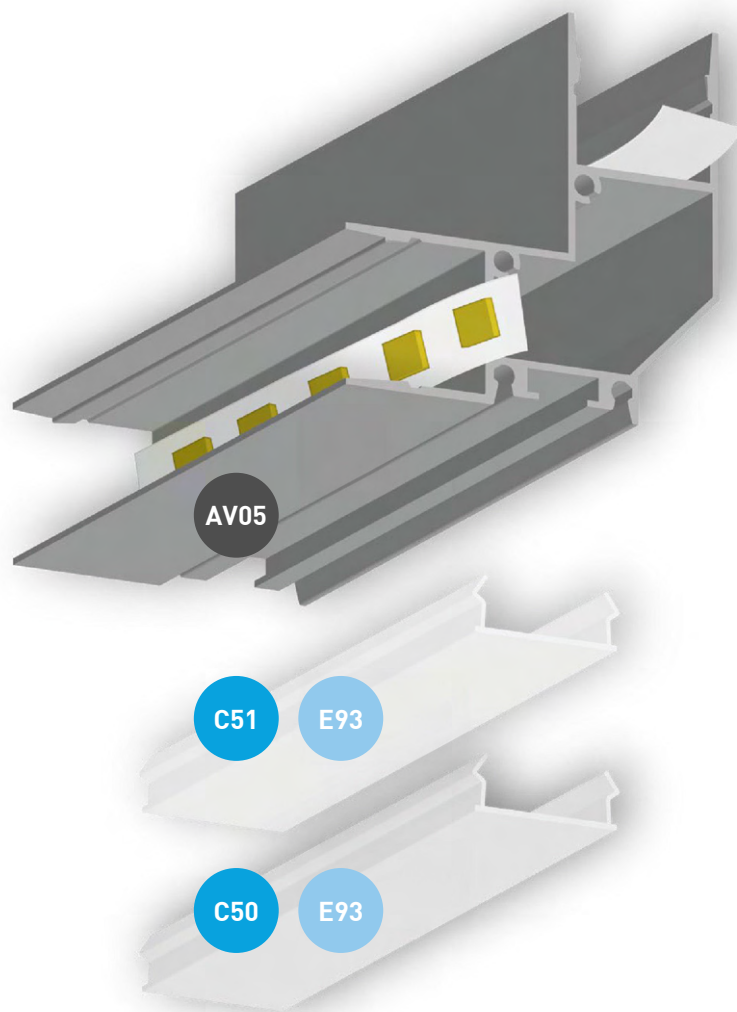

AV06

INDIRETO | INDIRECT



12/16mm
WIDTH MAX.



971g/m
WEIGHT



200cm
LENGTH

PERFIS DE ALUMÍNIO

brilumen





AV06 + C27



AV06 + C27



PERFIS PROFILES			
AV06	WH	G812-3166	●
AV06	BL	G812-3167	●
DIFUSORES DIFFUSERS			
C27	65%	G860-0084	
TOPOS END CAPS			
E94W		G812-3196	●
E94B		G812-3195	●
ACESSÓRIOS ACCESSORIES			
Z35		G812-3200	
Z51		G812-3362	
Z10		G830-1504	
Z11		G830-1505	

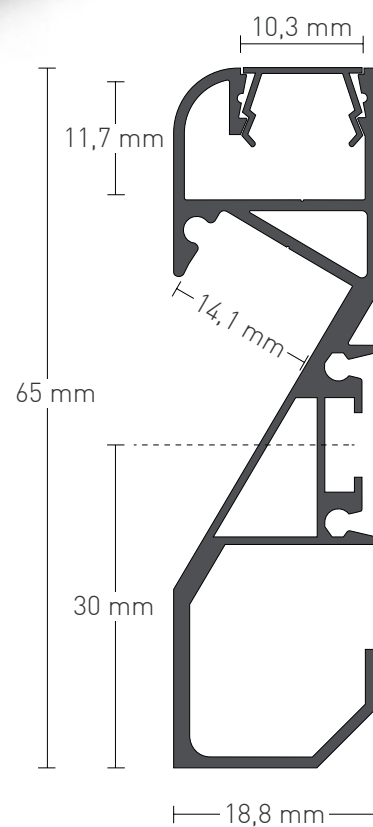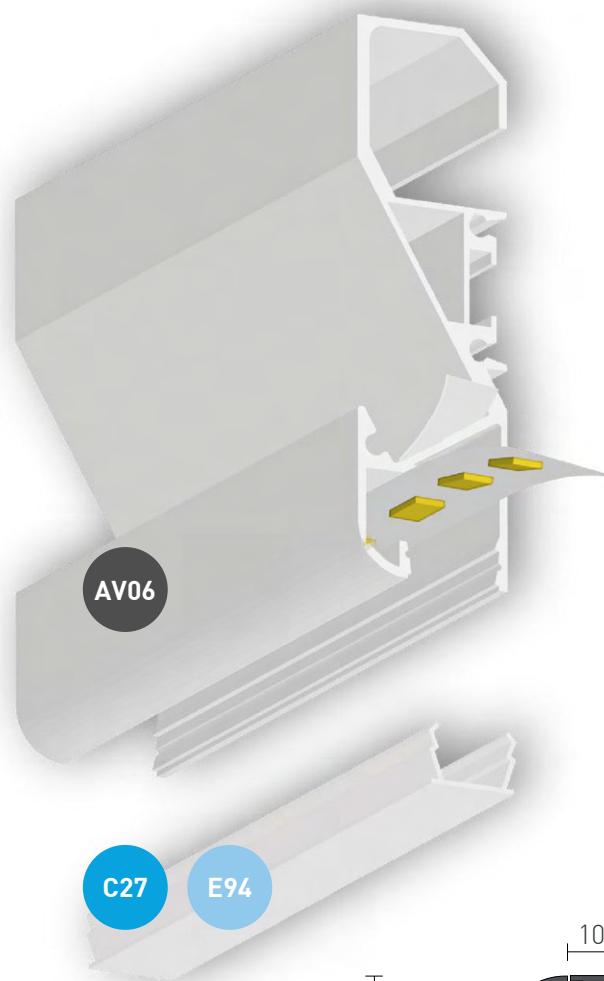

LP13

INDIRETO | INDIRECT



12mm
WIDTH MAX.



623g/m
WEIGHT




200cm
LENGTH



LP13 + C2 + LP10.1





LP13 + LP10.1 + C32

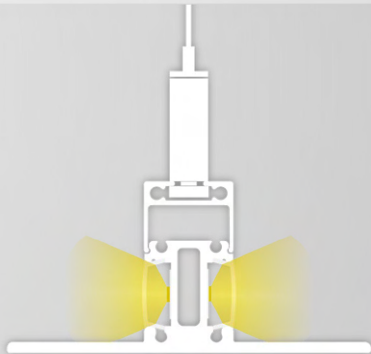


LP13 + C2 + LP10 + Z03W

PERFIS PROFILES			
LP13	AL	G810-1004	
LP13	WH	G810-1003	●
LP13	BL	G810-1002	●
DIFUSORES DIFFUSERS			
C1	65%	G860-0004	
C2	85%	G860-0003	●
C58	75%	G860-0154	●
C32	25%	G860-0070	●
TOPOS END CAPS			
E66		G810-1005	
E66W		G810-1006	●
E66B		G810-1007	●
LUMINÁRIA LINEAR SUSPENSÃO LINEAR SUSPENSION LUMINAIRE			
LP10	AL	G810-7012	
LP10	WH	G810-7013	●
LP10	BL	G810-7014	●
Z10		G830-1504	
Z11		G830-1505	
Z03		G830-1502	
Z03W		G830-1512	●
Z03B		G830-1511	●
Z05		G830-1501	
ACESSÓRIOS ACCESSORIES			
LP10.1	10cm	G810-1085	
	200cm	G810-1080	

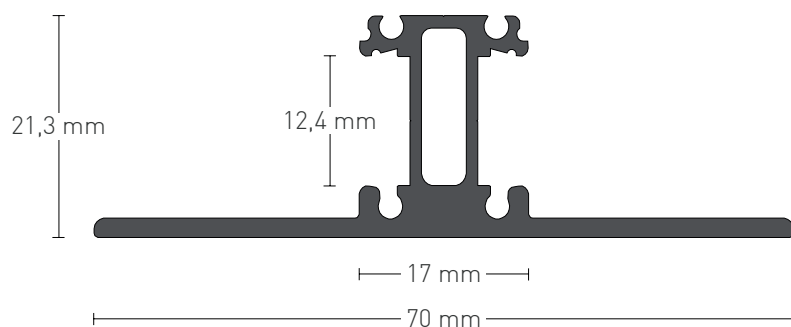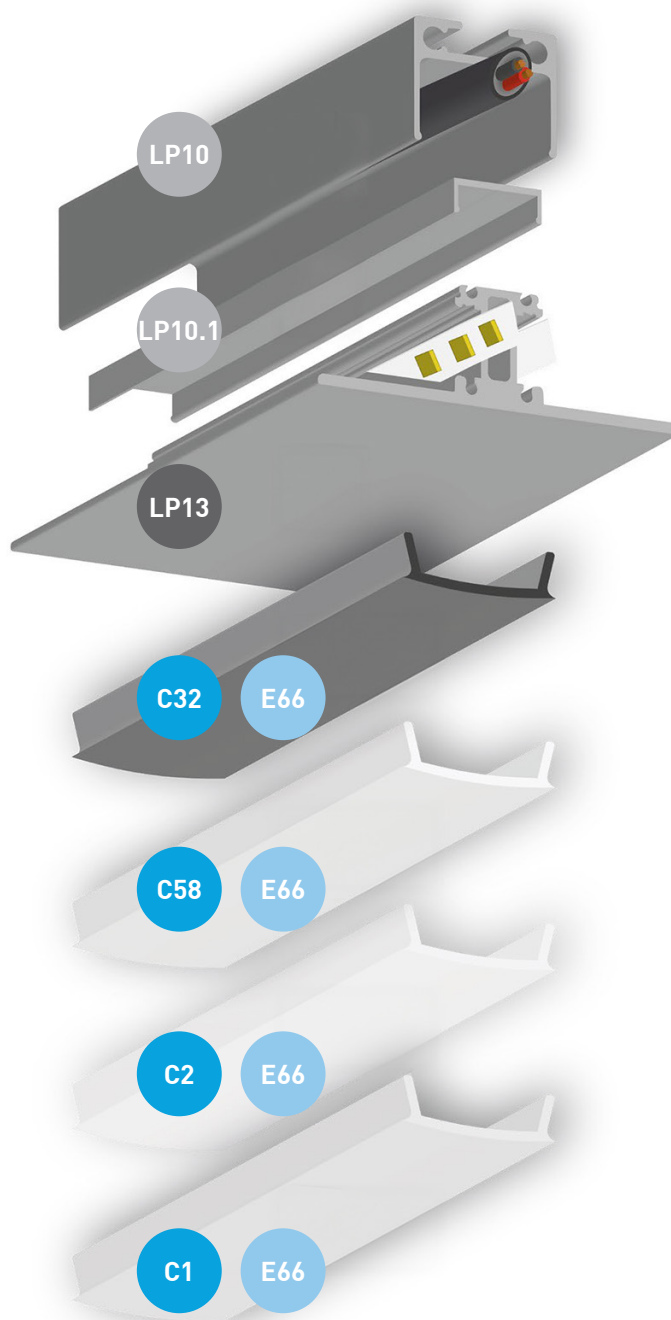

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES
GESSO CARTONADO | DRYWALL

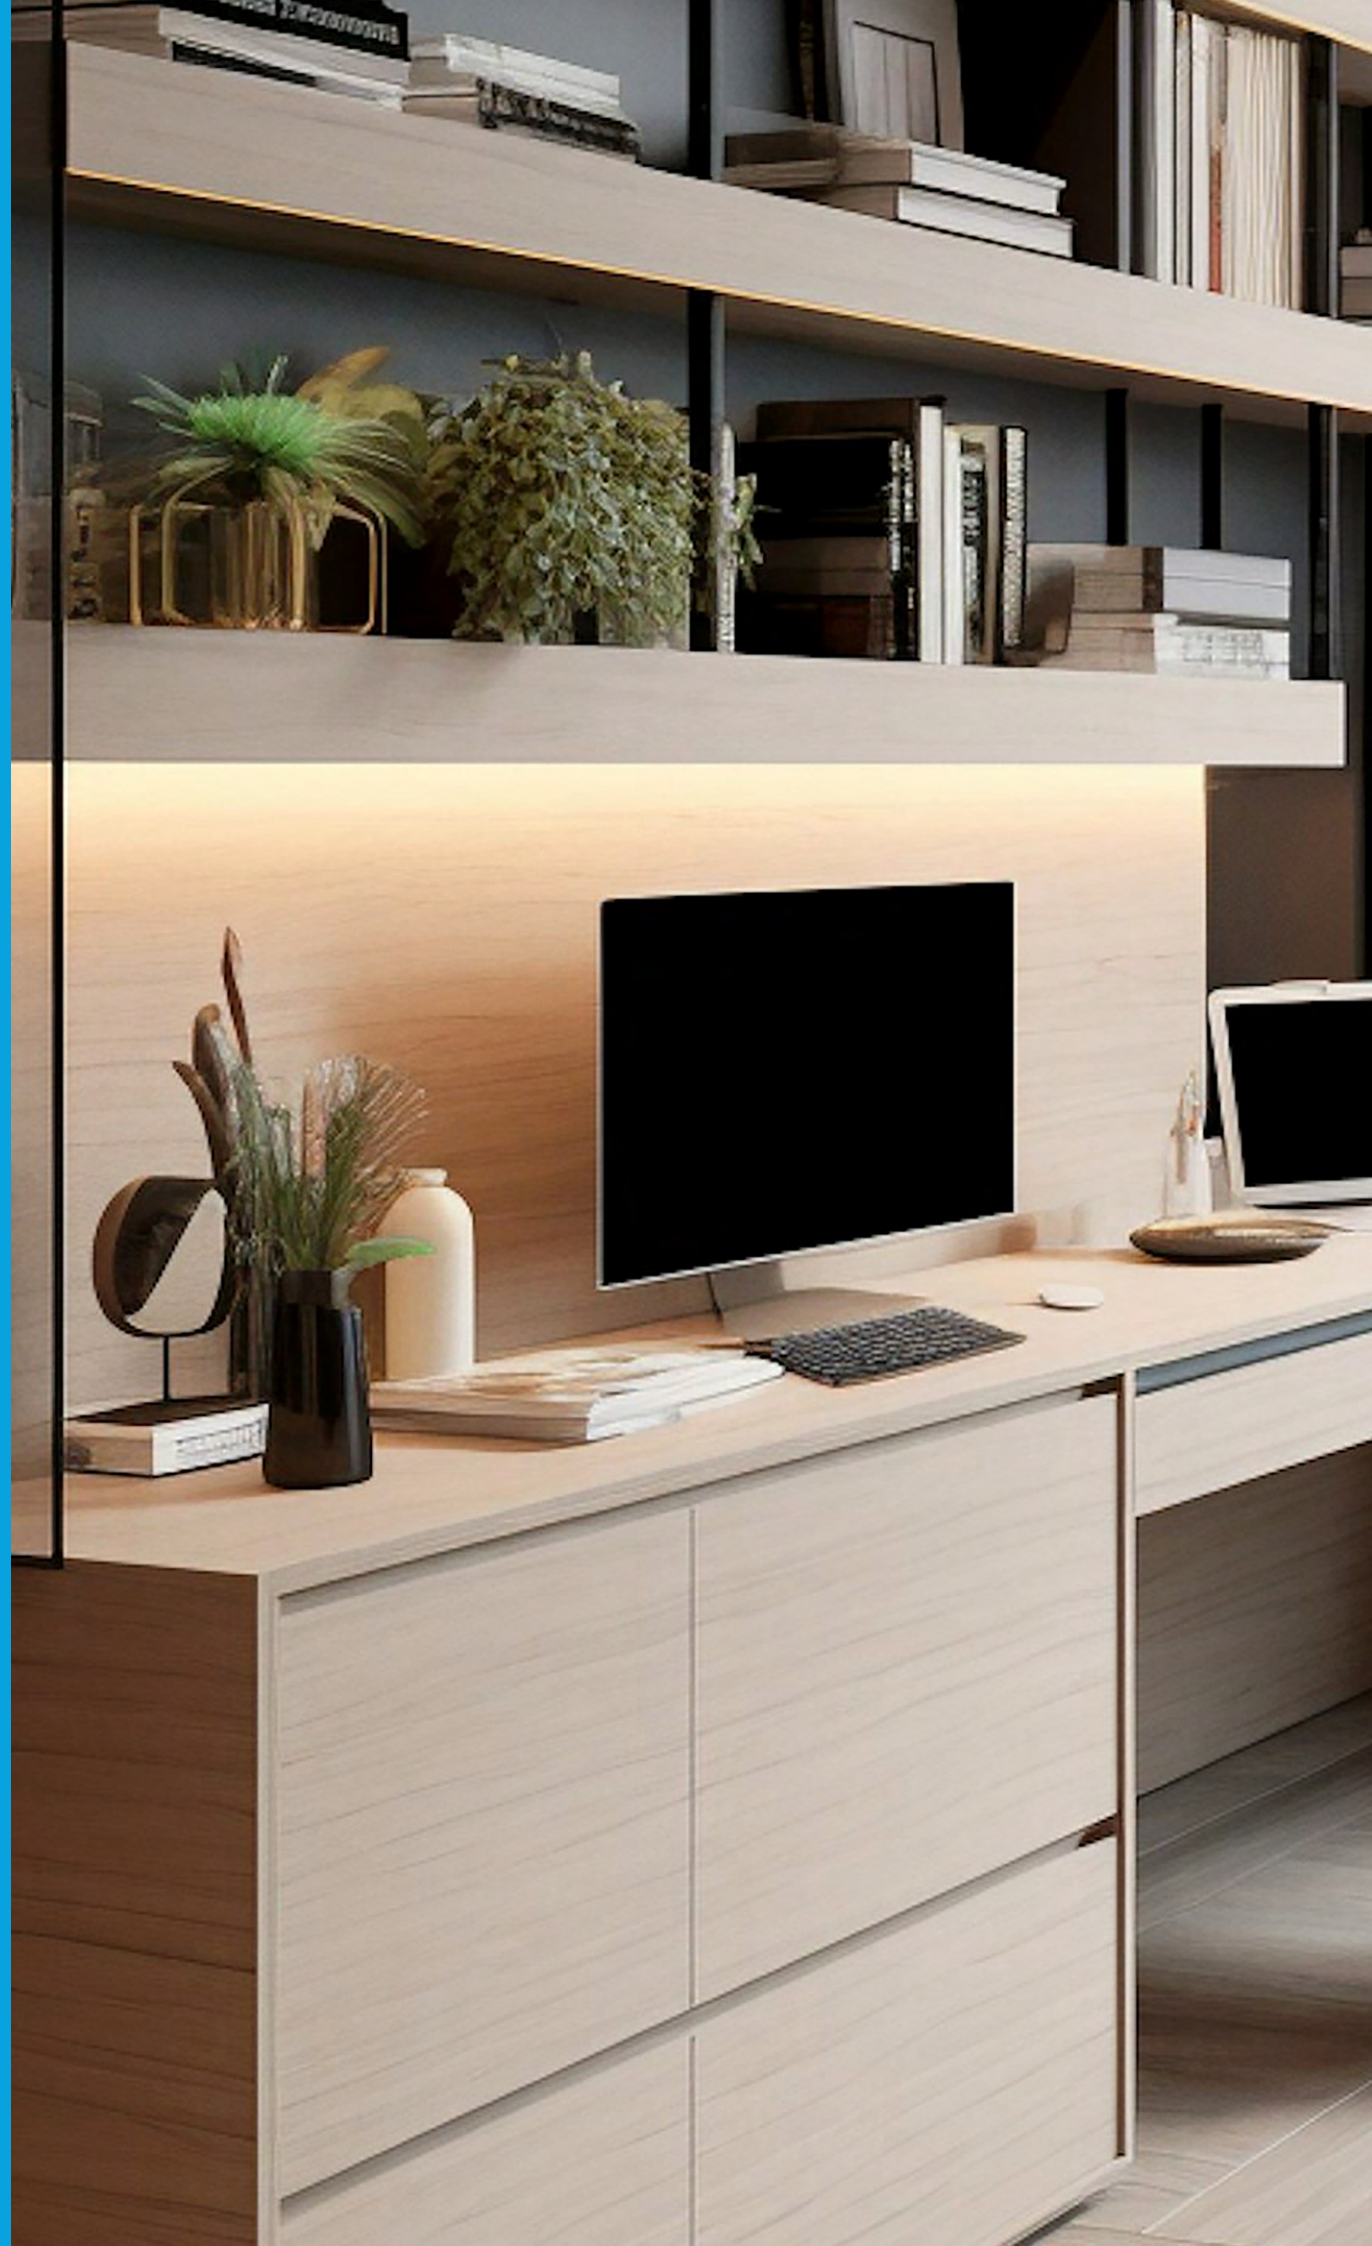



BTP01

GESSO CARTONADO | DRYWALL

PERFIS DE ALUMÍNIO



6mm

WIDTH MAX.




327g/m

WEIGHT





200cm

LENGTH

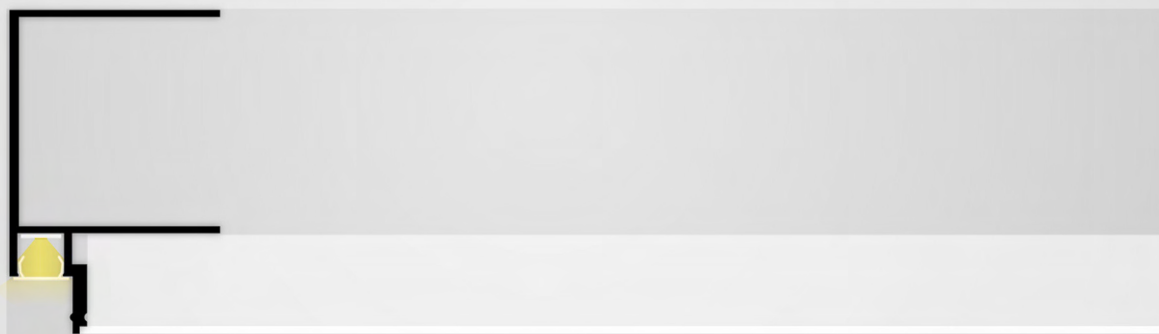

BTP01 + C24

BTP01 BTP01	PERFIS PROFILES	
	AL	G810-2050
	BL	G810-2056 ●
C24	DIFUSORES DIFFUSERS	
	65%	G860-0106

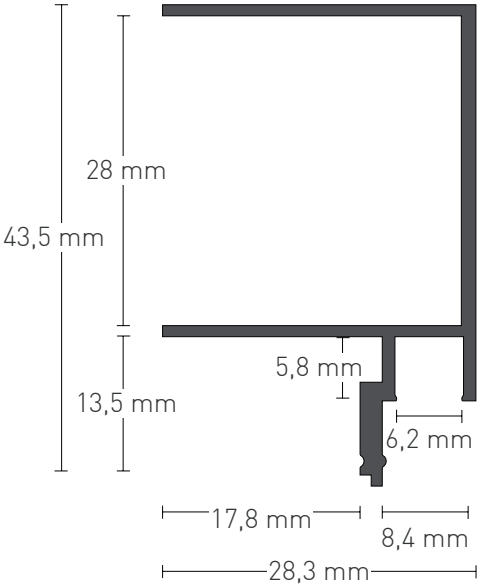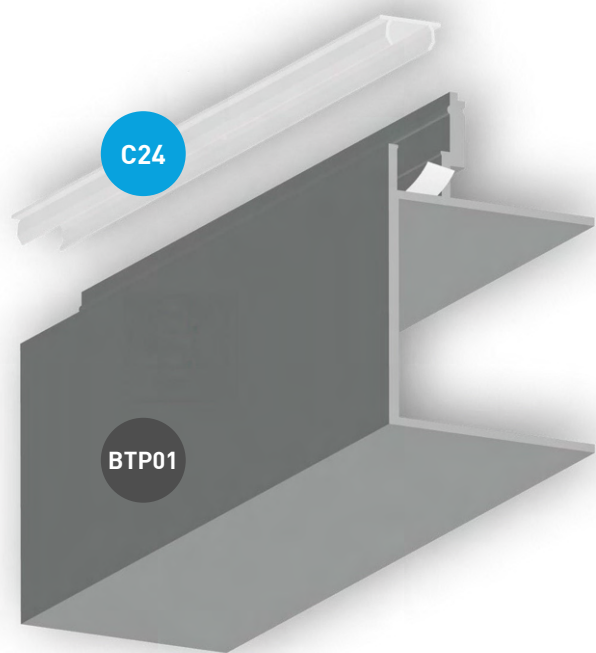

BTP02

GESSO CARTONADO | DRYWALL

PERFIS DE ALUMÍNIO

brilumen



11mm
WIDTH MAX.



433g/m
WEIGHT





200cm
LENGTH



BTP02 + C27

BTP02 BTP02	PERFIS PROFILES	
	AL	G810-2040
	WH	G810-3040 ●
C27	DIFUSORES DIFFUSERS	
	65%	G860-0084

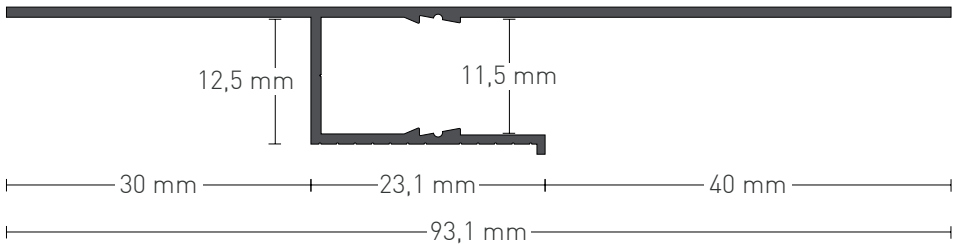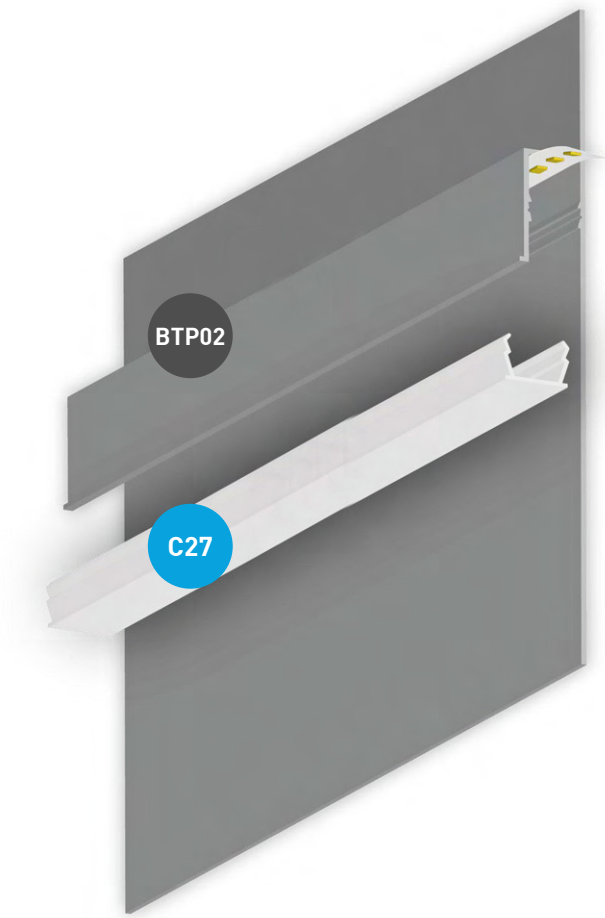

BTP03

GESSO CARTONADO | DRYWALL



14mm
WIDTH MAX.



283g/m
WEIGHT





200cm
LENGTH

BTP03 + C32

BTP03 + C2

PERFIS PROFILES		
BTP03	AL	G810-2051
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E208 		G810-23009
E209 		G810-23010
ACESSÓRIOS ACCESSORIES		
C1S 		G860-0065

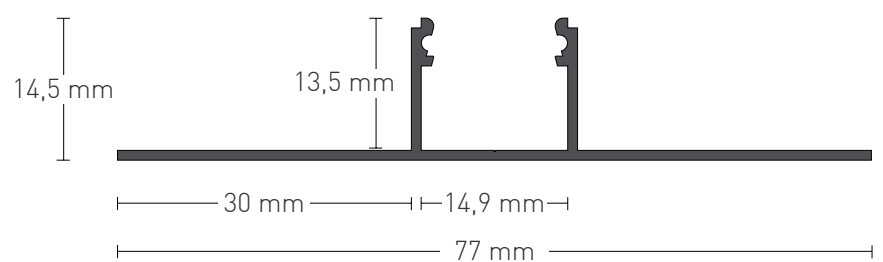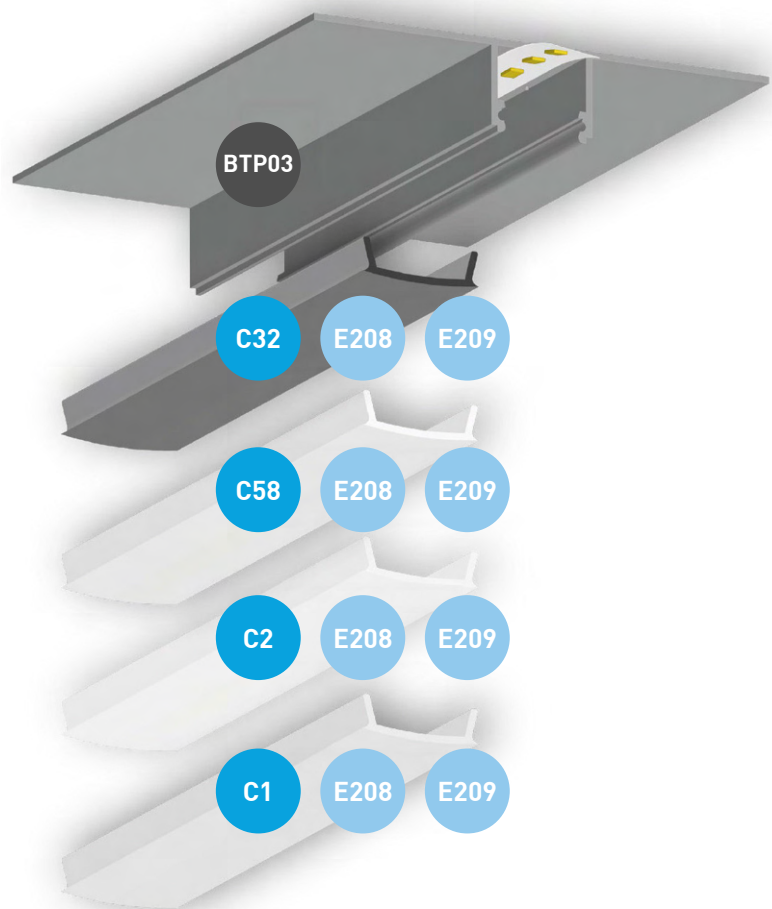

BTP04

GESSO CARTONADO | DRYWALL



14mm
WIDTH MAX.



209g/m
WEIGHT



200cm
LENGTH





BTP04 + C32



BTP04 + C2

PERFIS PROFILES		
BTP04	AL	G810-2042
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E210		G810-23011
E211		G810-23012
ACESSÓRIOS ACCESSORIES		
C1S		G860-0065

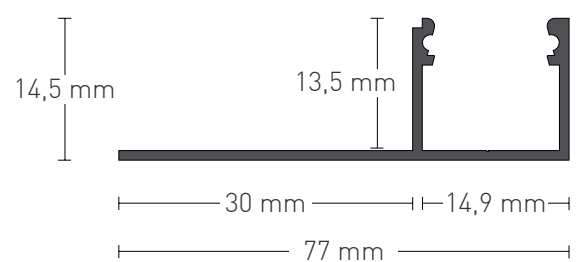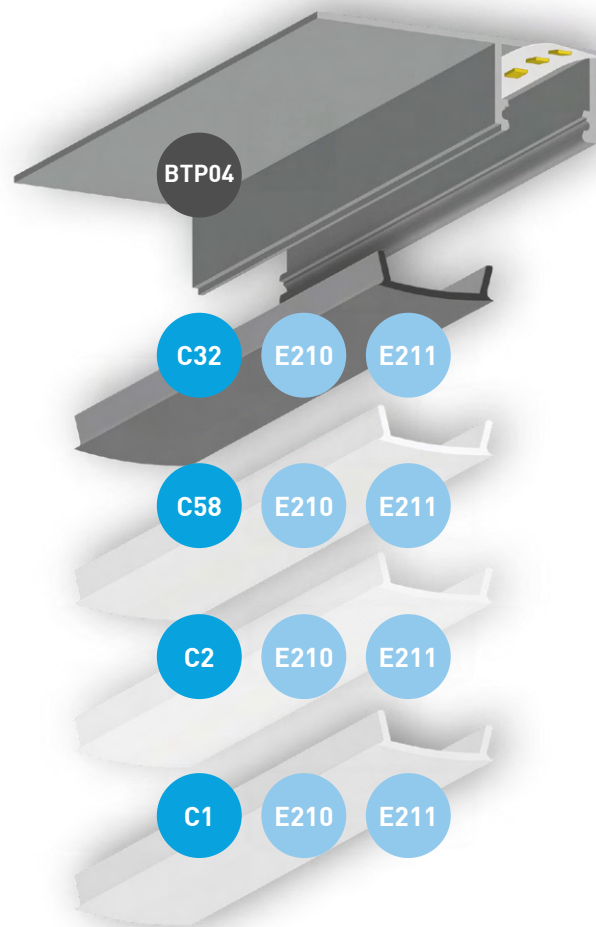

BTP05

GESSO CARTONADO | DRYWALL




20mm
WIDTH MAX.





383g/m
WEIGHT



200cm
LENGTH

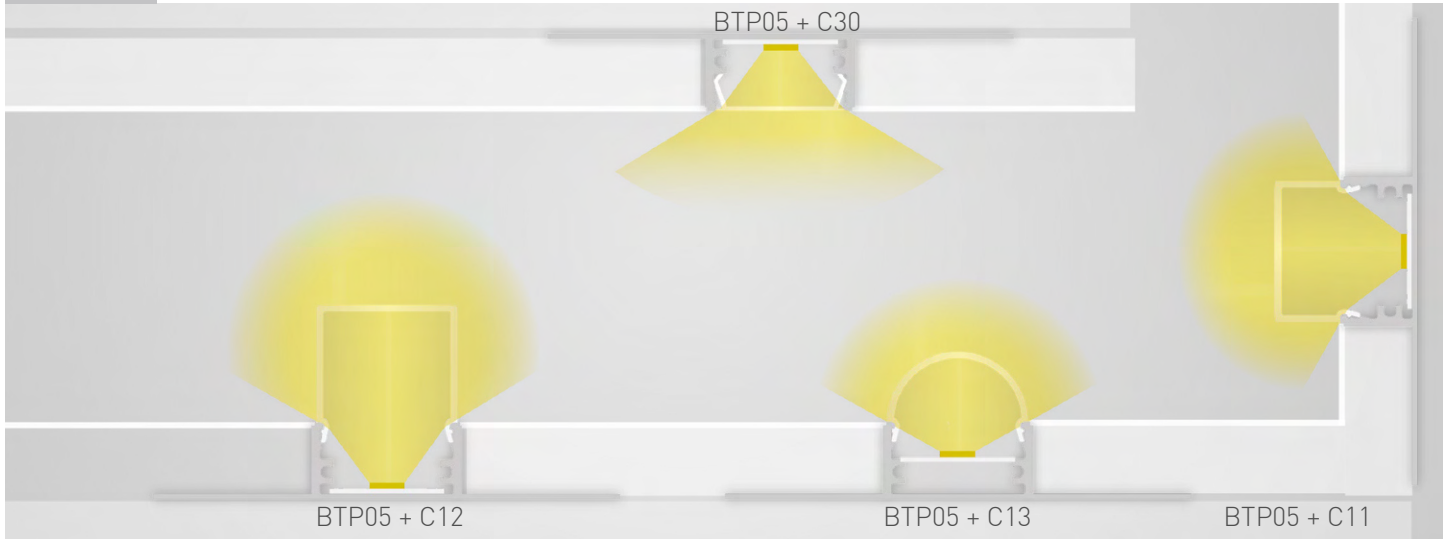

PERFIS PROFILES		
BTP05	AL	G810-2043
DIFUSORES DIFFUSERS		
C30	65%	G860-0077
C47	75%	G860-0099 ●
C11	65%	G860-0018
C35	85%	G860-0063 ●
C12	65%	G860-0019
C31	85%	G860-0068 ●
C13	65%	G860-0020 ●
TOPOS END CAPS		
E43 E43W E43B	C30 / C47	G820-1011
		G820-1015 ●
		G820-1016 ●
E44 E44W E44B	C11 / C35	G820-2011
		G820-2012 ●
		G820-2013 ●
E45 E45W E45B	C12 / C31	G820-3011
		G820-3012 ●
		G820-3013 ●
E46 E46W E46B	C13	G820-4011
		G820-4012 ●
		G820-4013 ●
E212		G810-23013
E213		G810-23014
ACESSÓRIOS ACCESSORIES		
C10S		G860-0066

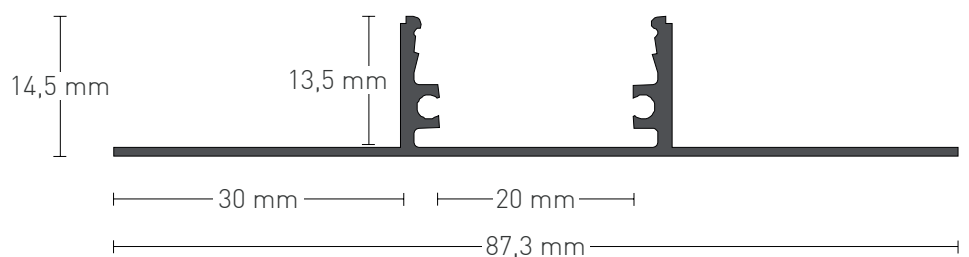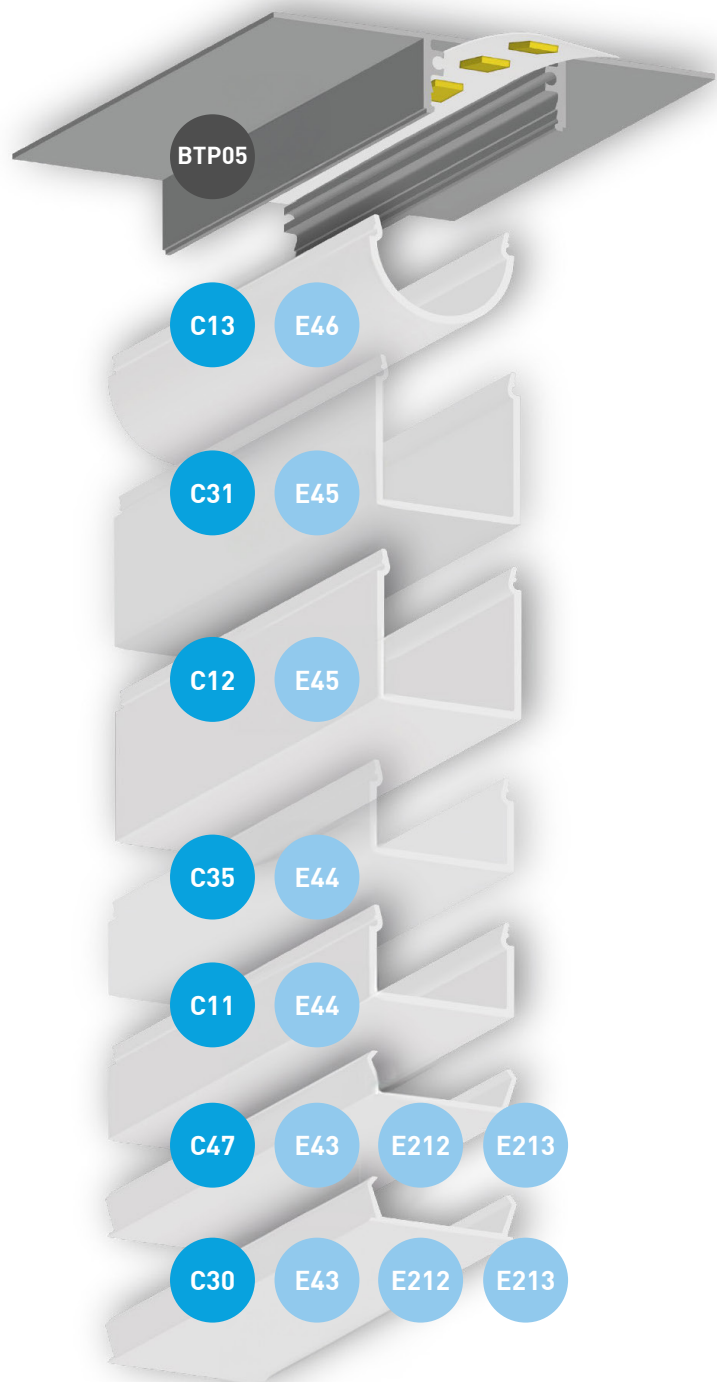

BTP06

GESSO CARTONADO | DRYWALL





14mm
WIDTH MAX.



471g/m
WEIGHT





200cm
LENGTH

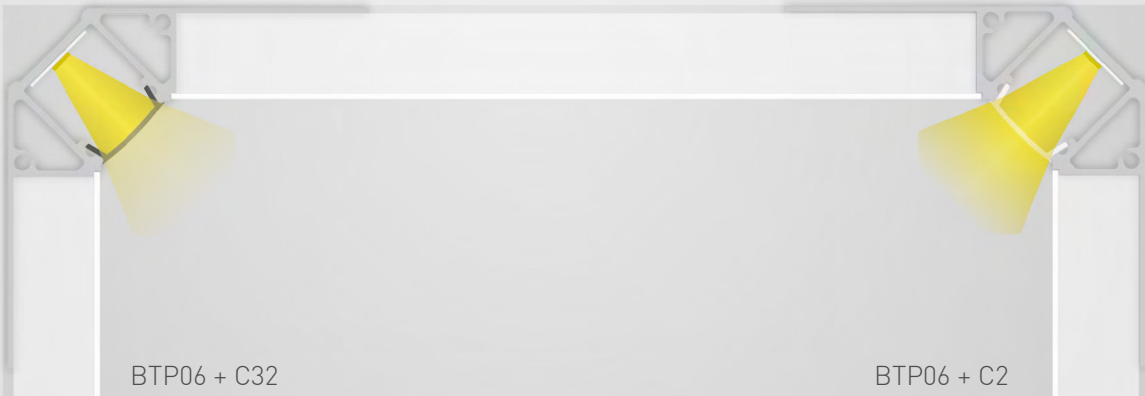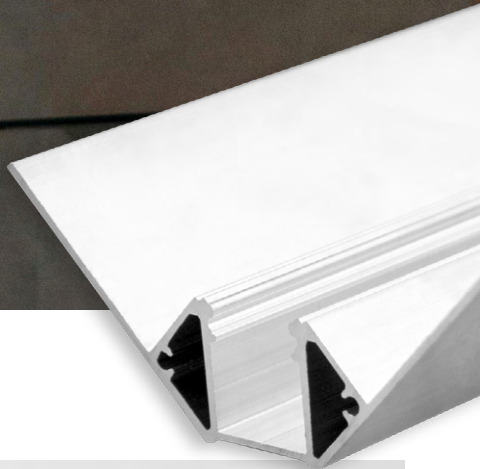

BTP06 + C32

BTP06 + C2

PERFIS PROFILES		
BTP06	AL	G810-2044
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E214 		G810-23015
E215 		G810-23016
ACESSÓRIOS ACCESSORIES		
C1S 		G860-0065

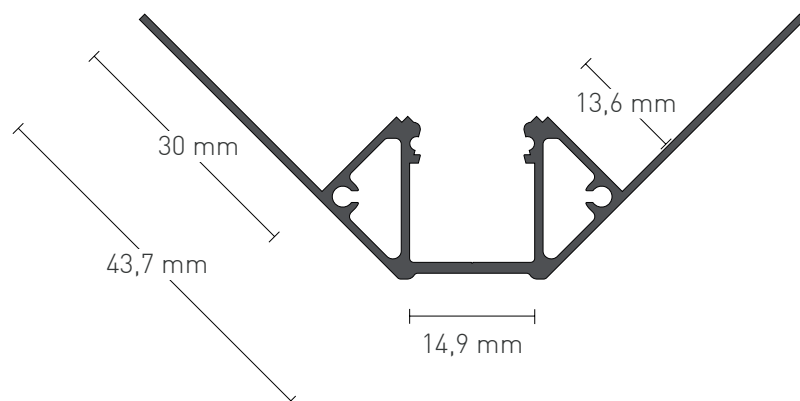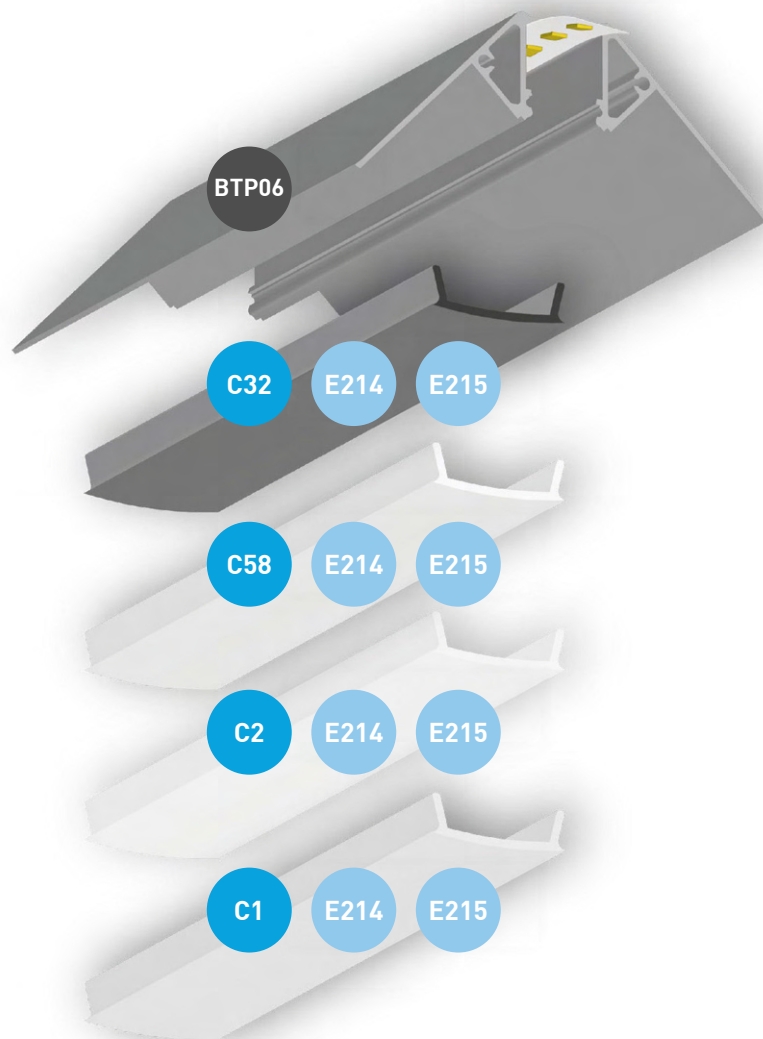

BTP07

GESSO CARTONADO | DRYWALL



12mm
WIDTH MAX.



344g/m
WEIGHT



200cm
LENGTH





BTP07 + C32



BTP07 + C2

PERFIS PROFILES		
BTP07	AL	G810-2045
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E216		G810-23017
E217		G810-23018
ACESSÓRIOS ACCESSORIES		
C15		G860-0065

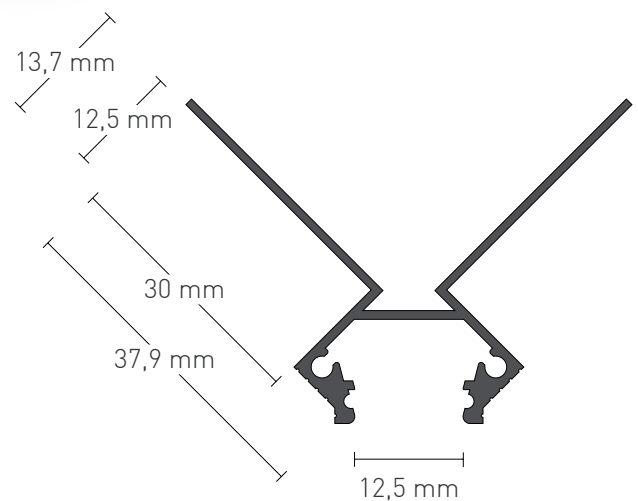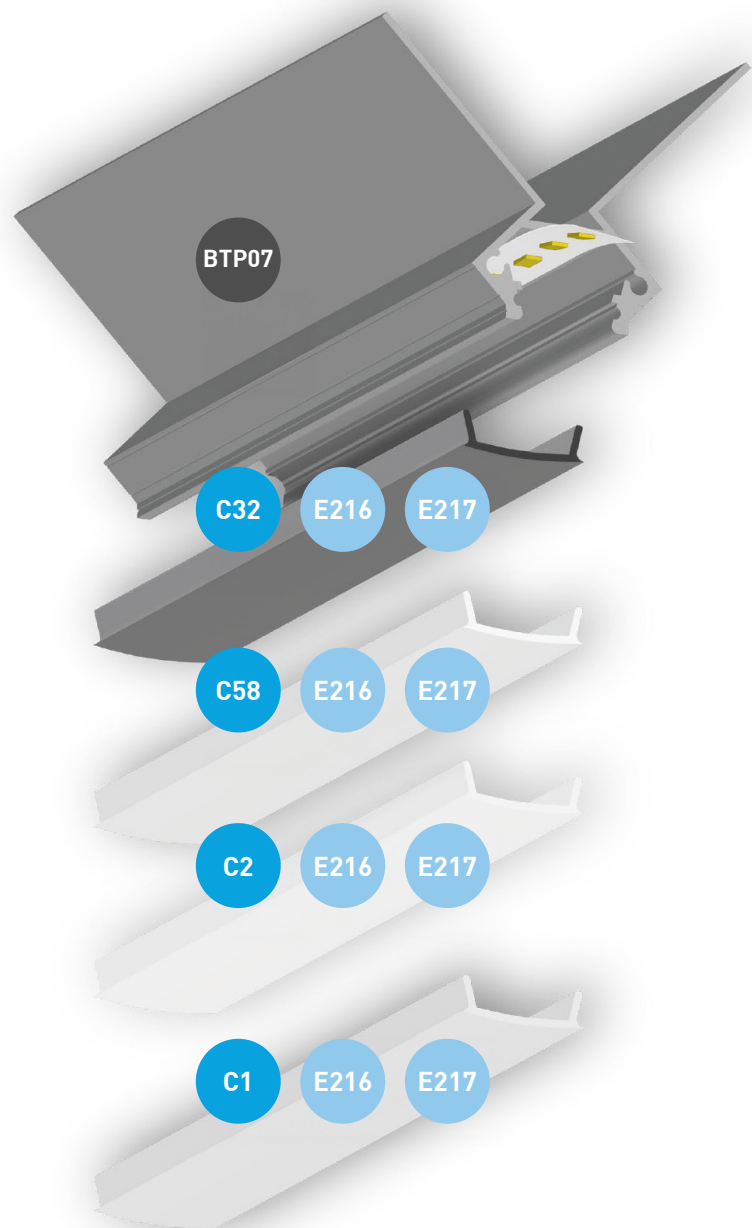

BTP10

GESSO CARTONADO | DRYWALL



11mm
WIDTH MAX.




273g/m
WEIGHT



716g/m
WEIGHT



200cm
LENGTH






BTP10 + BTP08 + C27 + C27

PERFIS | PROFILES

BTP10	AL	G810-2047	
BTP10	WH	G810-3047	●
BTP10	BL	G810-2053	●
BTP08	AL	G810-2046	
BTP08	WH	G810-3046	●
BTP08	BL	G810-2052	●

DIFUSORES | DIFFUSERS

C27	65%	G860-0084
-----	-----	-----------

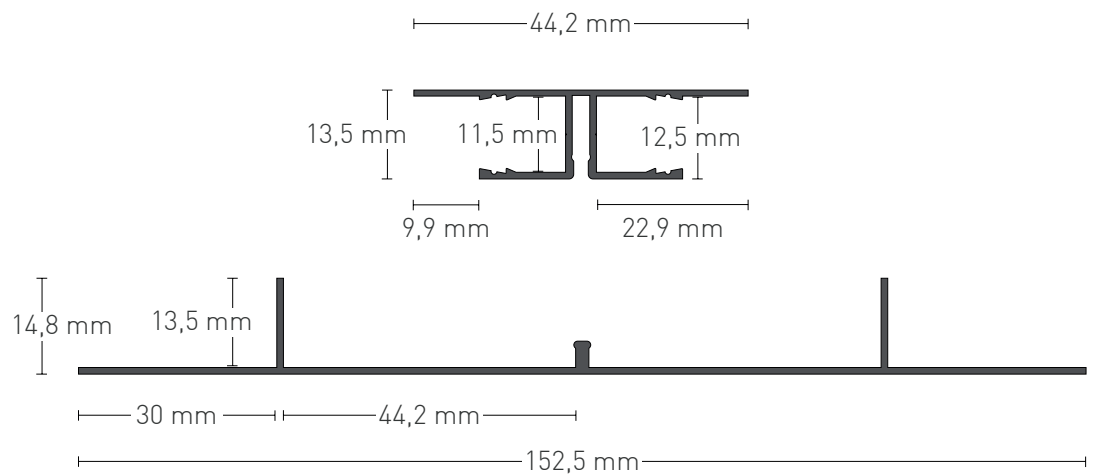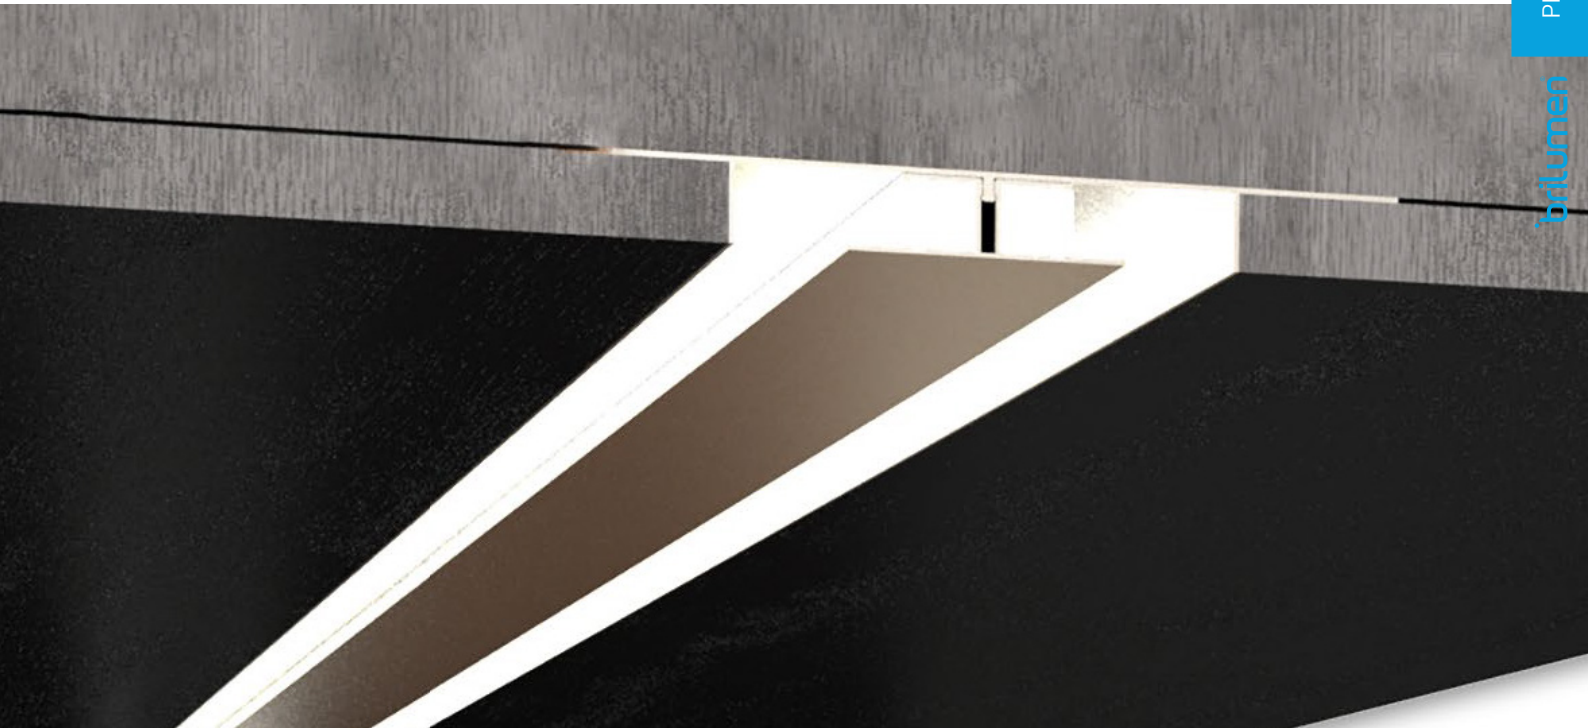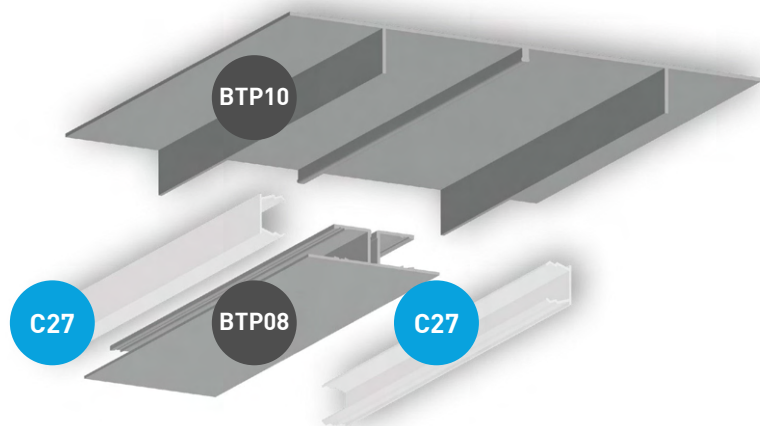

BTP11

GESSO CARTONADO | DRYWALL



11mm
WIDTH MAX.



273g/m
WEIGHT



1545g/m
WEIGHT





200cm
LENGTH



BTP11 + BTP08 +C27 + C27

PERFIS PROFILES		
BTP11	AL	G810-2048
BTP11	WH	G810-3048 ●
BTP11	BL	G810-2054 ●
BTP08	AL	G810-2046
BTP08	WH	G810-3046 ●
BTP08	BL	G810-2052 ●
DIFUSORES DIFFUSERS		
C27	65%	G860-0084
ACESSÓRIOS ACCESSORIES		
Z10		G830-1504
Z11		G830-1505

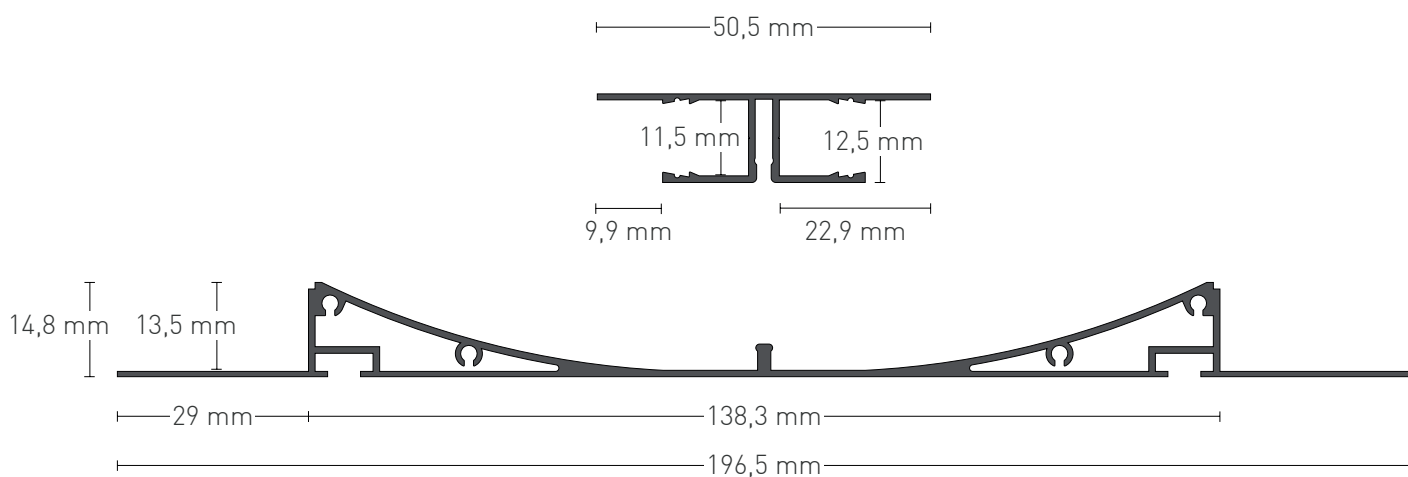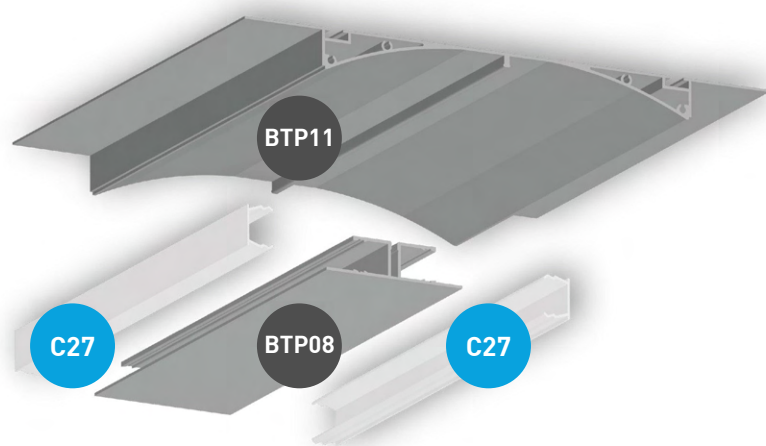

BTP12

GESSO CARTONADO | DRYWALL



11mm
WIDTH MAX.



990g/m
WEIGHT





200cm
LENGTH



BTP12 + C27

PERFIS PROFILES		
BTP12	AL	G810-2049
BTP12	WH	G810-3049 ●
BTP12	BL	G810-2055 ●
DIFUSORES DIFFUSERS		
C27	65%	G860-0084
ACESSÓRIOS ACCESSORIES		
Z10		G830-1504
Z11		G830-1505

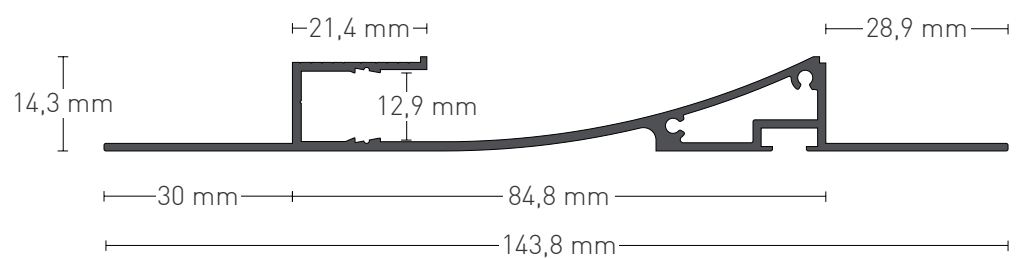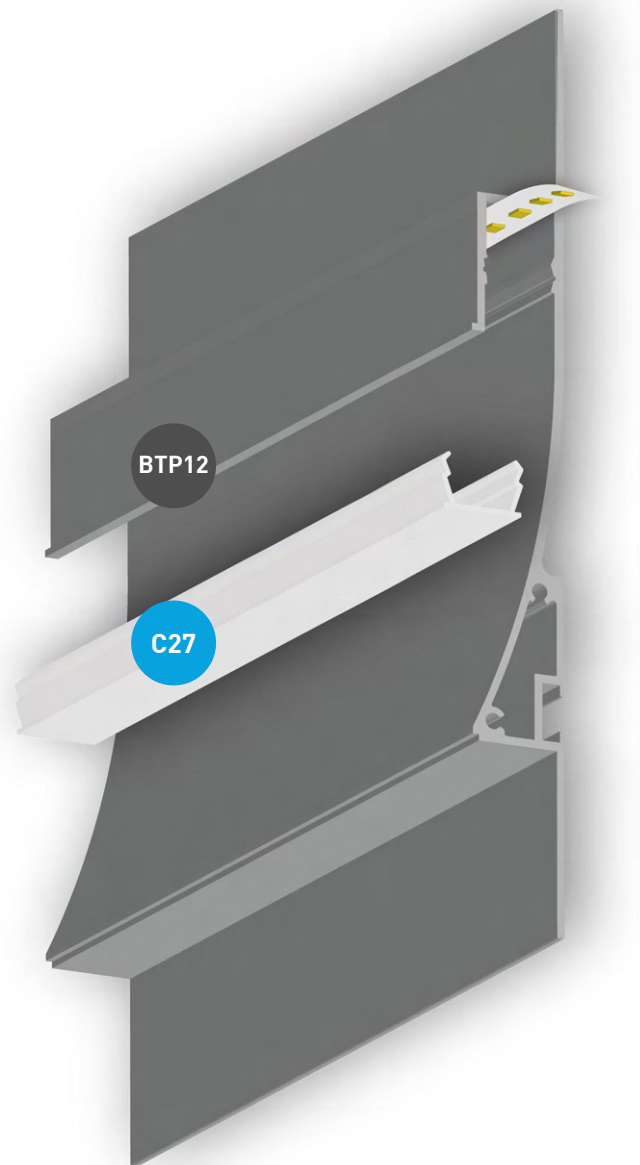

BTP13

GESSO CARTONADO | DRYWALL




21mm
WIDTH MAX.



544g/m
WEIGHT





200cm
LENGTH

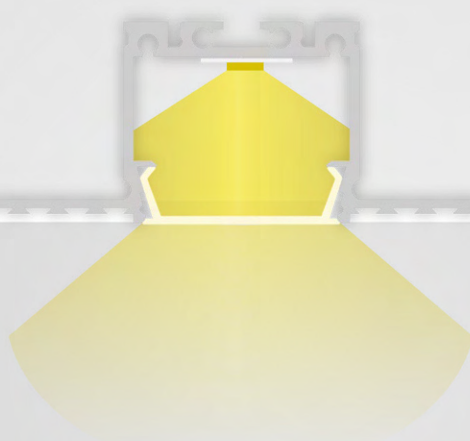

BTP13 + C30

PERFIS PROFILES		
BTP13	AL	G810-3090
DIFUSORES DIFFUSERS		
C30	65%	G860-0077
C47	75%	G860-0099 ●
C11	65%	G860-0018
C35	85%	G860-0063 ●
C12	65%	G860-0019
C31	85%	G860-0068 ●
C13	65%	G860-0020 ●
ACESSÓRIOS ACCESSORIES		
C10S		G860-0066
Z22		G830-1508
Z23		G830-1509

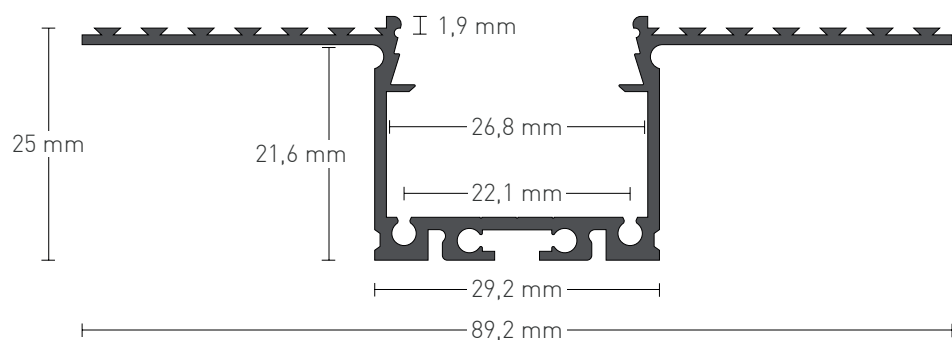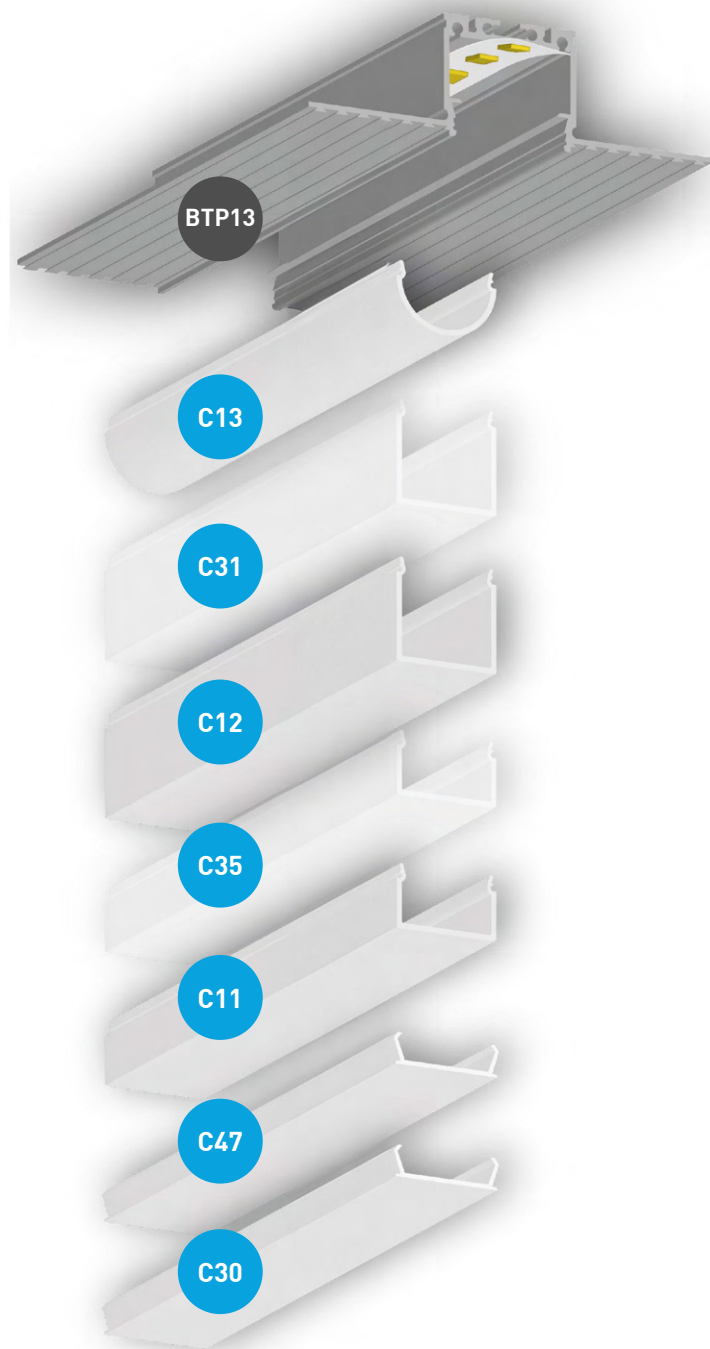

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES

AZULEJO | TILE





PF01

AZULEJO | TILE




12mm
WIDTH MAX.



150g/m
WEIGHT





200cm
LENGTH

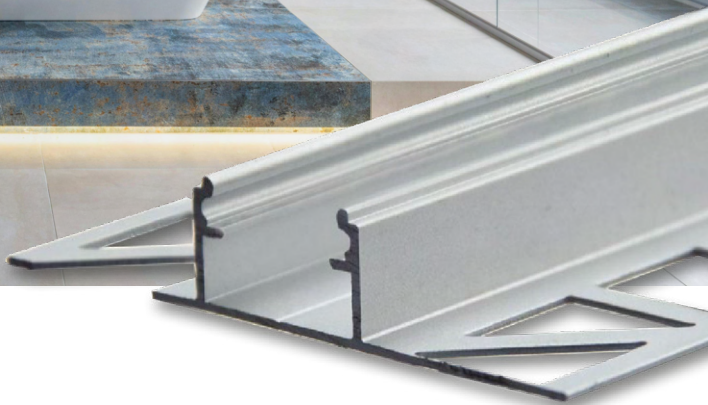

PF01 + C1

PERFIS PROFILES		
PF01	AL	G810-2032
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E200		G810-23001
E201		G810-23002
ACESSÓRIOS ACCESSORIES		
C1S		G860-0065

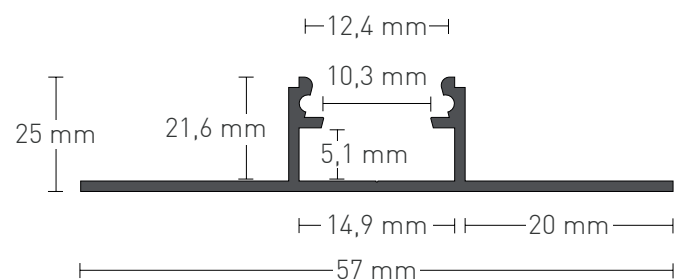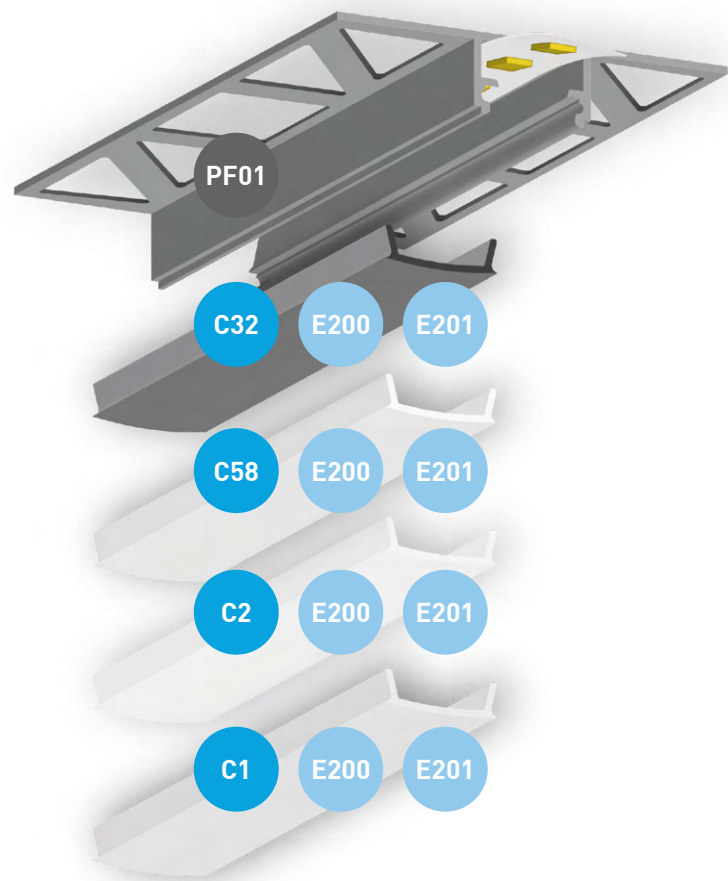

PF02

AZULEJO | TILE



12mm
WIDTH MAX.



140g/m
WEIGHT





200cm
LENGTH



PF02 + C1

PERFIS PROFILES		
PF02	AL	G810-2034
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E202		G810-23003
E203		G810-23004
ACESSÓRIOS ACCESSORIES		
C15		G860-0065

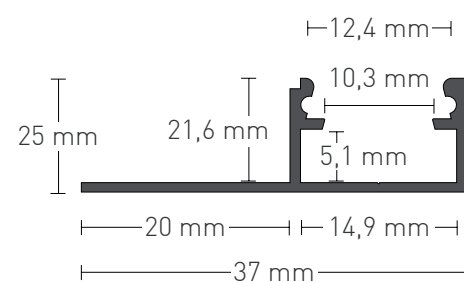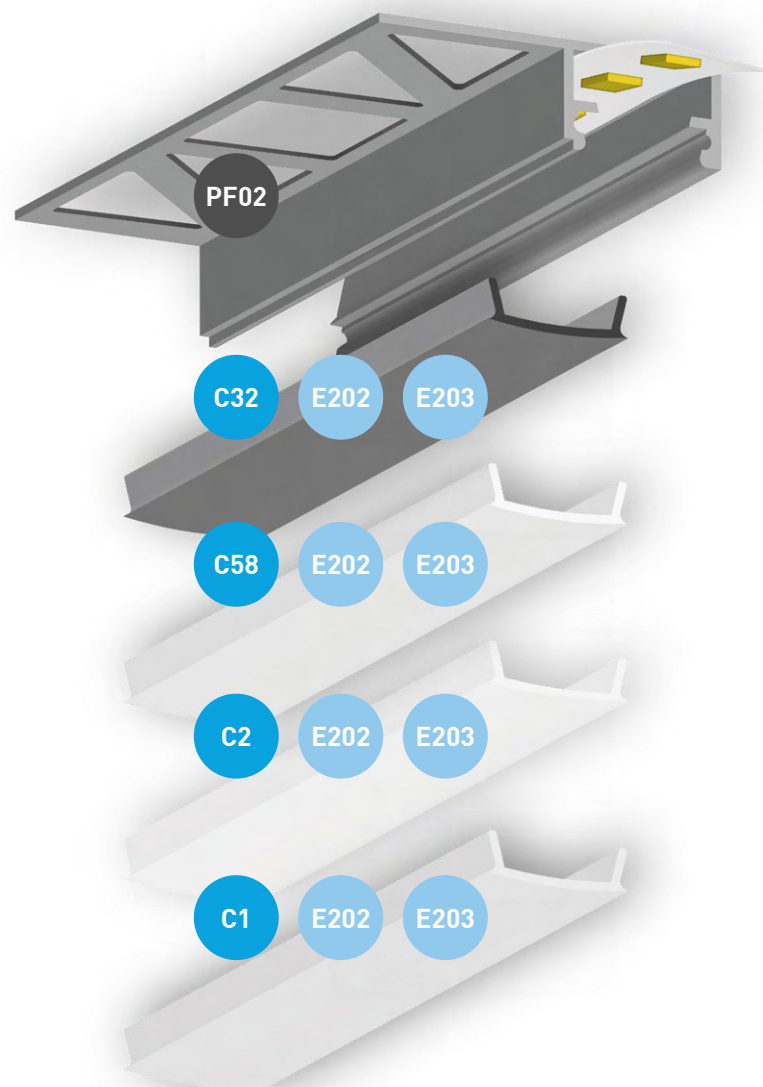

PF03

AZULEJO | TILE



8mm
WIDTH MAX.



86g/m
WEIGHT



200cm
LENGTH





PF03 + C23



PF03 + C34

PERFIS PROFILES		
PF03	AL	G812-3174
PF03	WH	G812-3322 ●
DIFUSORES DIFFUSERS		
C23	65%	G860-0046
C34	25%	G860-0074 ●
TOPOS END CAPS		
E218		G810-2319
E218W		G830-4022 ●
E219		G810-2320
E219W		G830-4023 ●

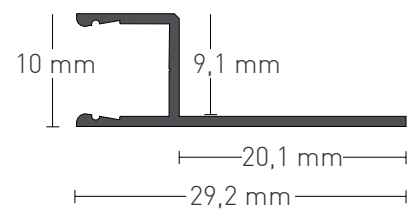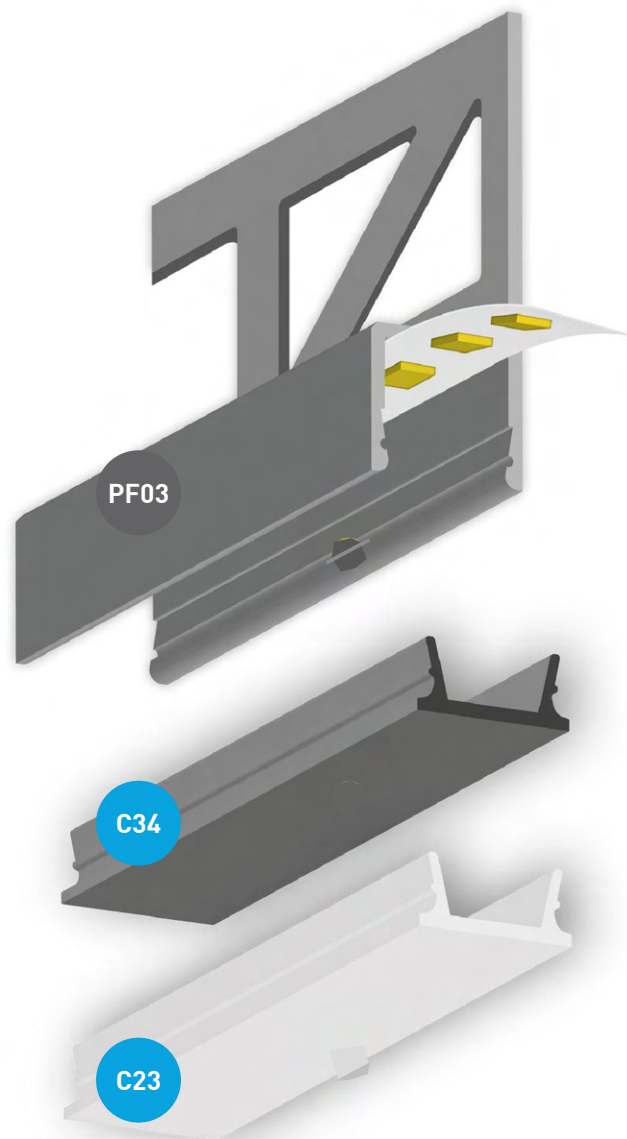

PF04

AZULEJO | TILE




10mm
WIDTH MAX.



129g/m
WEIGHT



200cm
LENGTH


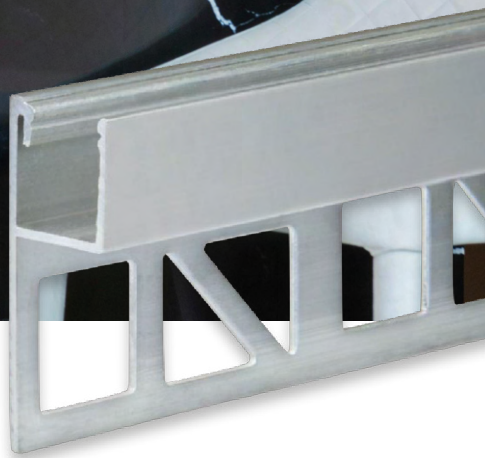


PF04 + C34



PF04 + C23

PERFIS PROFILES		
PF04	AL	G812-3176
PF04	WH	G812-3320 ●
DIFUSORES DIFFUSERS		
C23	65%	G860-0046
C34	25%	G860-0074 ●
TOPOS END CAPS		
E220 E220W		G810-2321
		G830-4024 ●
E221 E221W		G810-2322
		G830-4025 ●

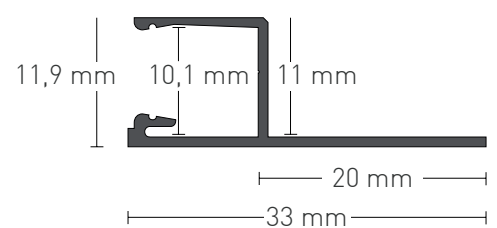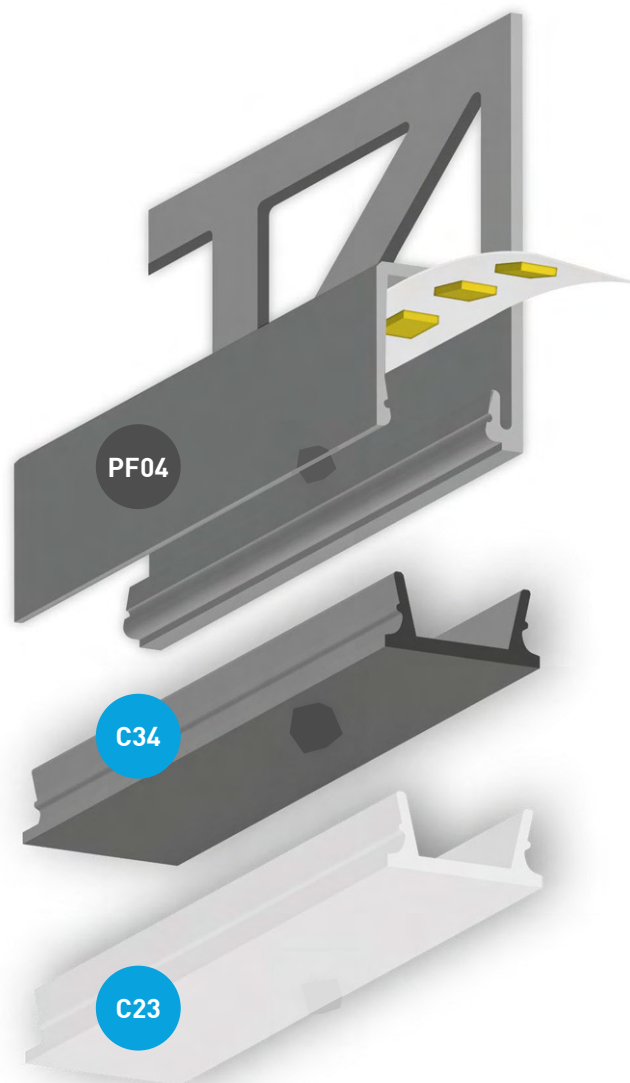

● Sob consulta | Under request

PF05

AZULEJO | TILE




12mm
WIDTH MAX.



224g/m
WEIGHT





200cm
LENGTH



PF05 + C1

PERFIS PROFILES		
PF05	AL	G810-2036
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E204 		G810-23005
E205 		G810-23006
ACESSÓRIOS ACCESSORIES		
C15 		G860-0065

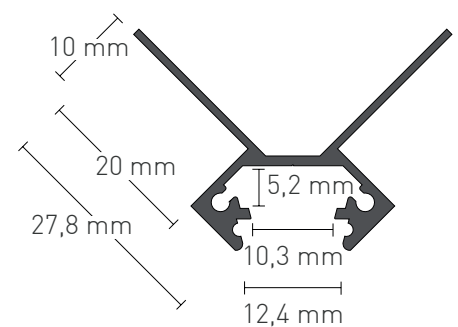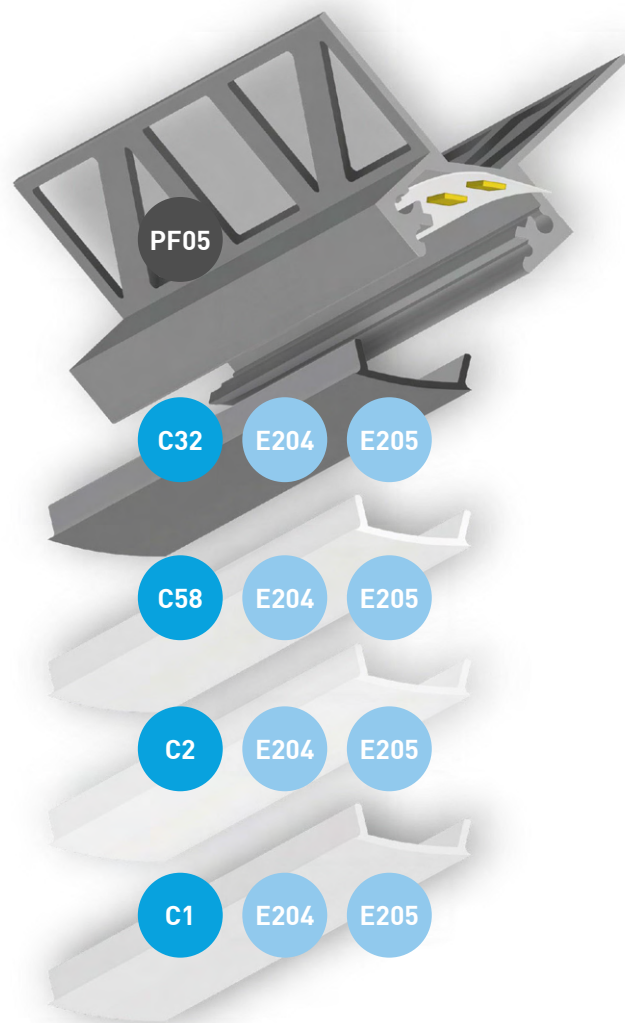

PF08 V2

AZULEJO | TILE



12mm
WIDTH MAX.



403g/m
WEIGHT





200cm
LENGTH



PF08 V2 + C1

PERFIS PROFILES		
PF08 V2	AL	G810-2230
DIFUSORES DIFFUSERS		
C1	65%	G860-0004
C2	85%	G860-0003 ●
C58	75%	G860-0154 ●
C32	25%	G860-0070 ●
TOPOS END CAPS		
E206		G810-23007
E207		G810-23008
ACESSÓRIOS ACCESSORIES		
C1S		G860-0065

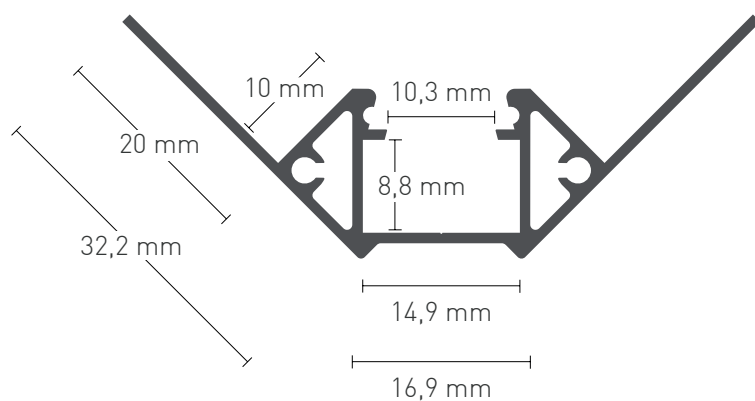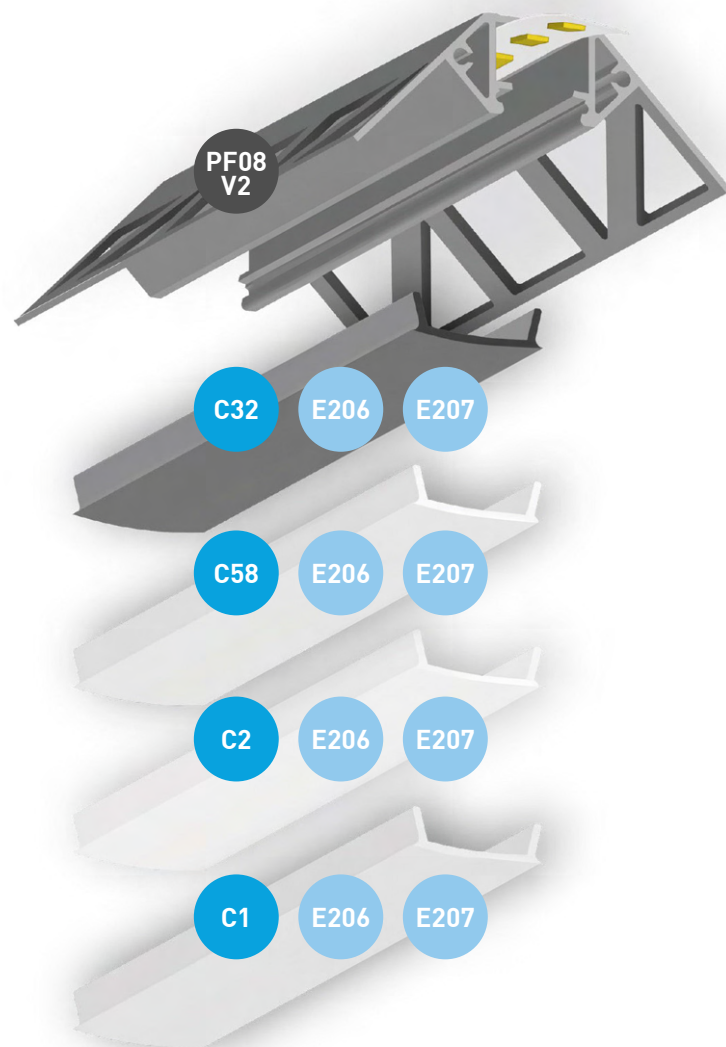

PERFIS DE ALUMÍNIO | ALUMINIUM PROFILES
ESPECIAL | SPECIAL





NP33

DISSIPADOR | COOLING

PERFIS DE ALUMÍNIO


brilumén




14mm
WIDTH MAX.


77g/m
WEIGHT


200cm
LENGTH

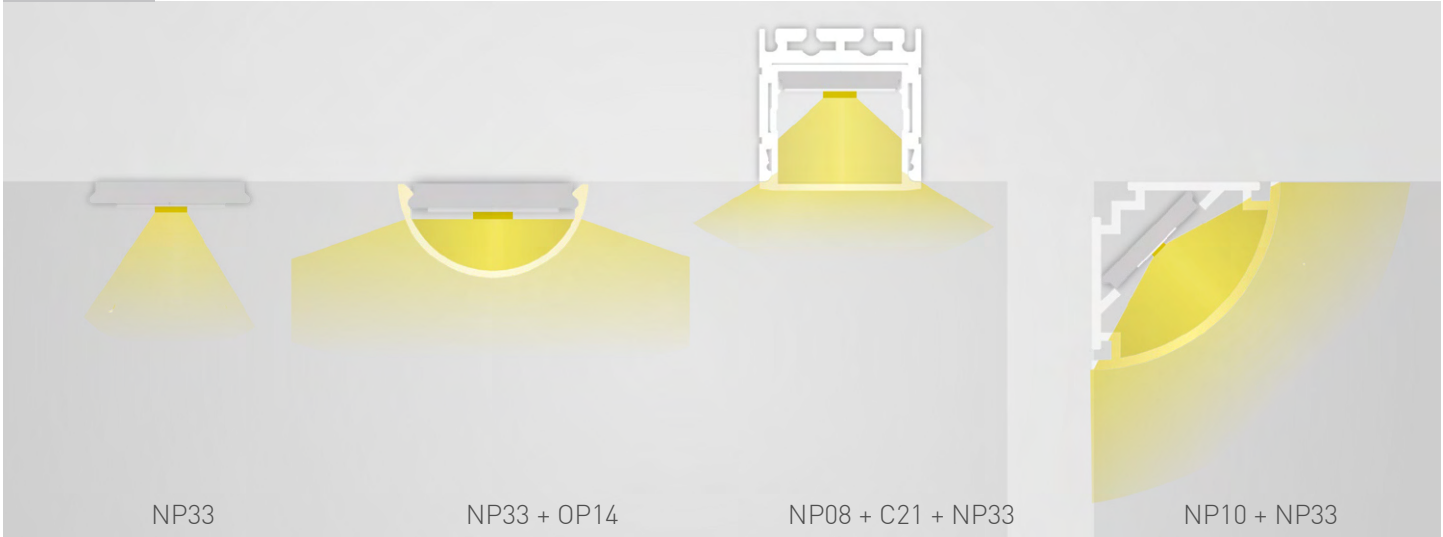

NP33

NP33 + OP14

NP08 + C21 + NP33


NP10 + NP33

PERFIS | PROFILES

NP33

AL

G810-5050

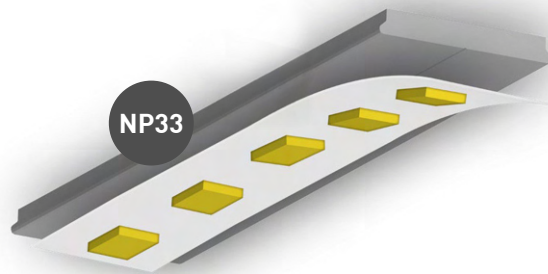

2 mm I 
14,6 mm

PB02

PAVIMENTO | WALKABLE




12mm
WIDTH MAX.



110g/m
WEIGHT






200cm
LENGTH



PB02 + C57

PERFIS PROFILES		
PB02	AL	G810-2083
DIFUSORES DIFFUSERS		
C57	65%	G860-0137
TOPOS END CAPS		
E98	WH	G830-4014
E99	WH	G830-4047

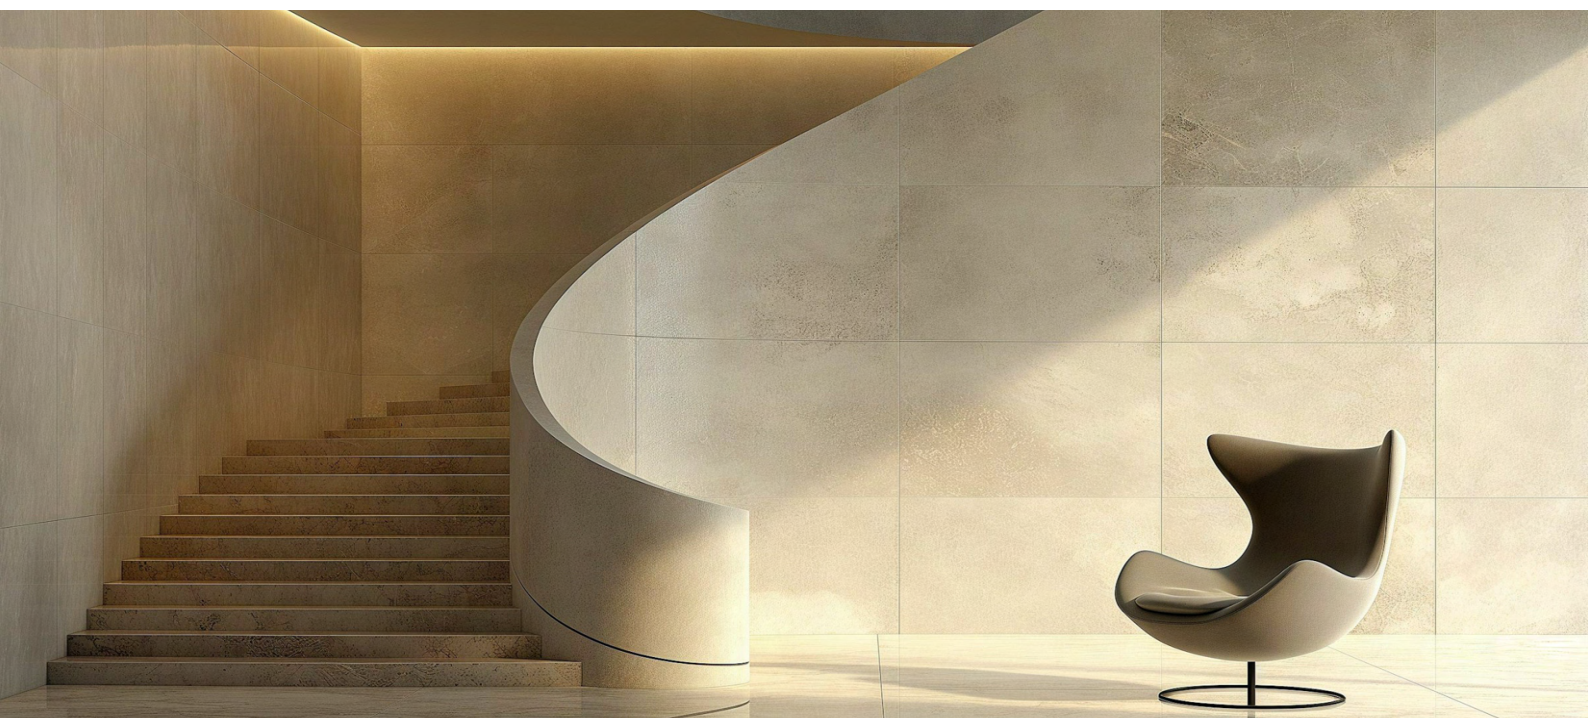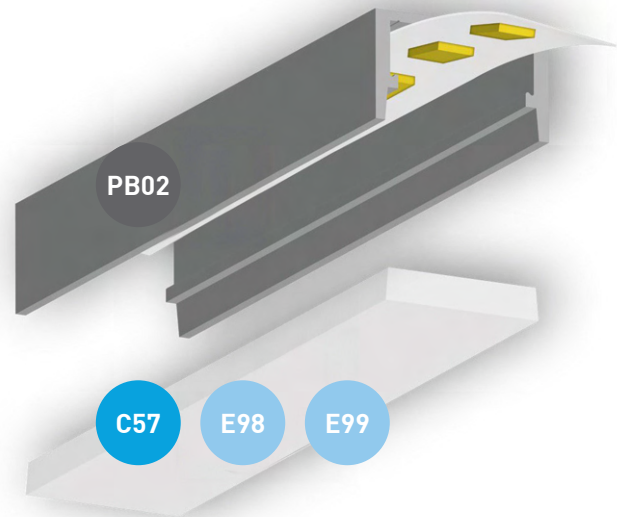

PM01

MOBILIÁRIO | FURNITURE




6mm
WIDTH MAX.



155g/m
WEIGHT






200cm
LENGTH

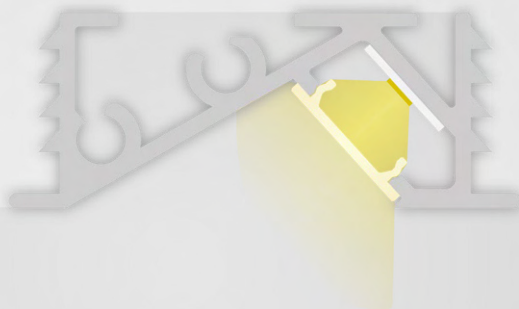

PM01 + C24

PERFIS PROFILES		
PM01	AL	G812-3168
PM01	WH	G812-3170 ●
PM01	BL	G812-3169 ●
DIFUSORES DIFFUSERS		
C24	65%	G860-0106
TOPOS END CAPS		
E95	AL	G812-3197
	WH	G812-3199 ●
	BL	G812-3198 ●
ACESSÓRIOS ACCESSORIES		
Z37		G812-3202

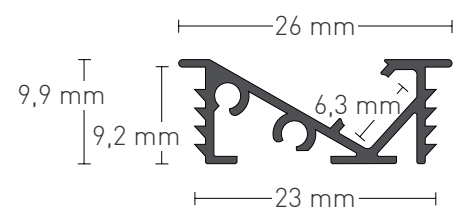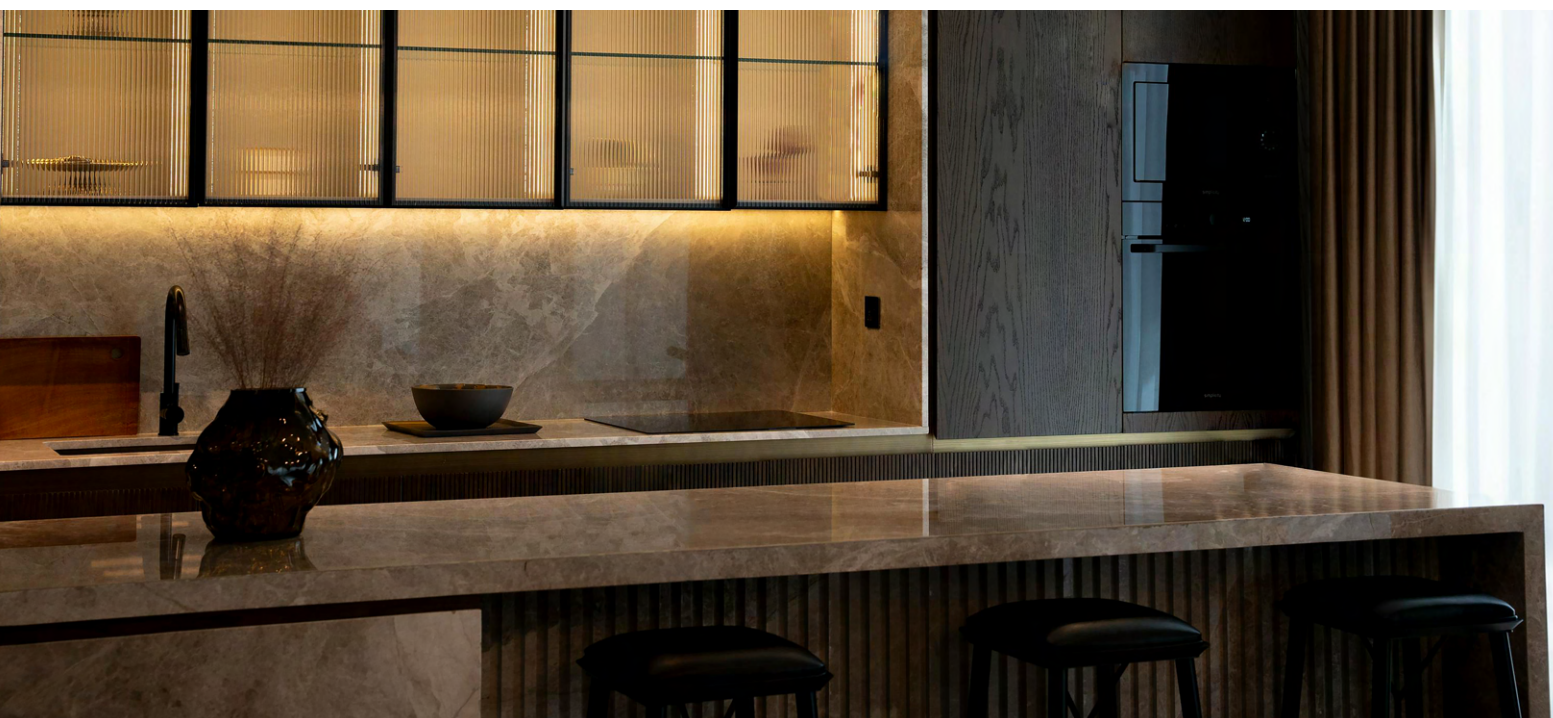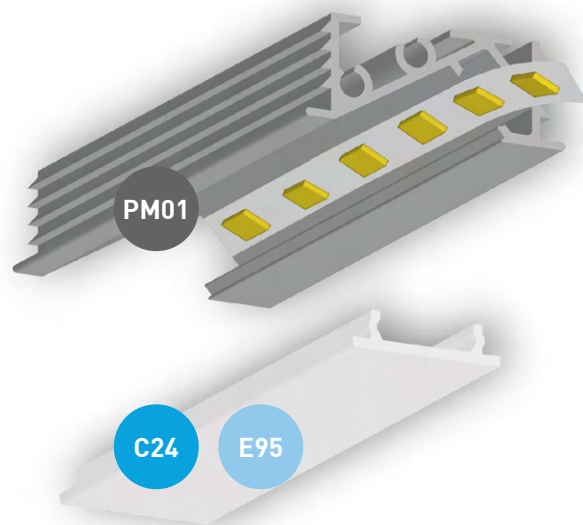

PM02

MOBILIÁRIO | FURNITURE



6mm
WIDTH MAX.



153g/m
WEIGHT






200cm
LENGTH



PM02 + C24

PM02 + C24

PERFIS PROFILES		
PM02	AL	G812-3171
PM02	WH	G812-3173 ●
PM02	BL	G812-3172 ●
DIFUSORES DIFFUSERS		
C24	65%	G860-0106
TOPOS END CAPS		
E95	AL	G812-3197
	WH	G812-3199 ●
	BL	G812-3198 ●
ACESSÓRIOS ACCESSORIES		
Z37		G812-3202

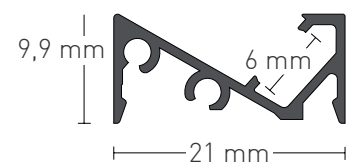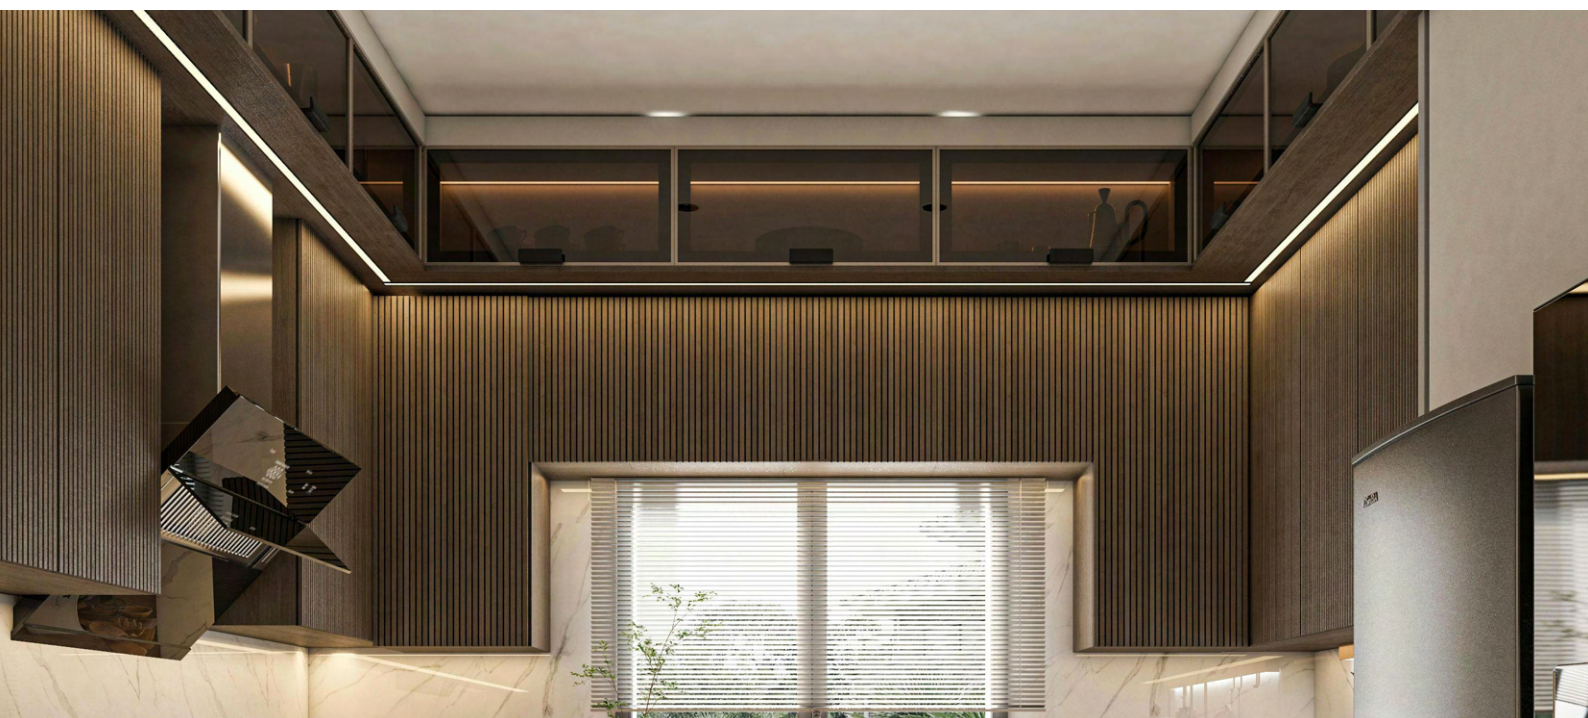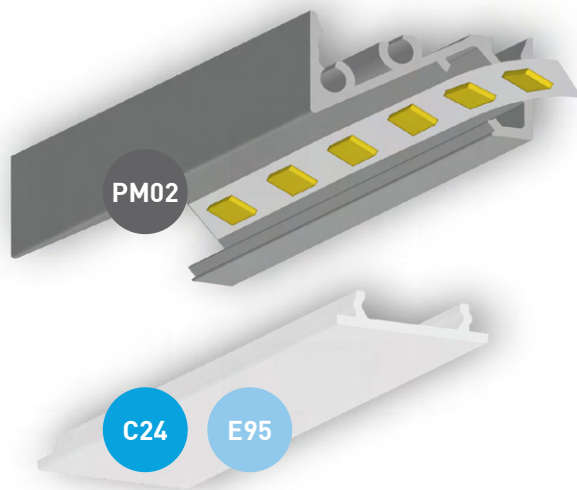

PS01

ESCADAS | STAIRS

PERFIS DE ALUMÍNIO

brilumen





13mm
WIDTH MAX.



497g/m
WEIGHT





200cm
LENGTH

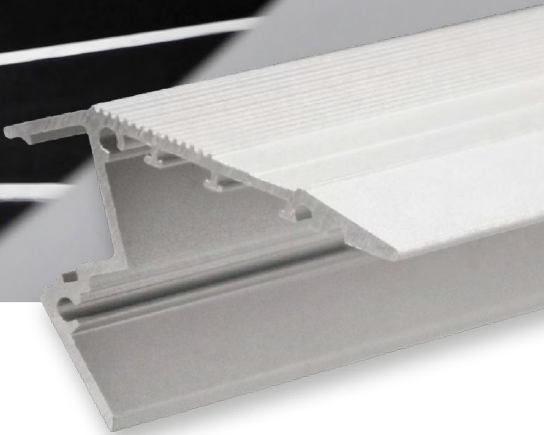

PS01 + C40

PERFIS PROFILES		
PS01	AL	G812-2100
DIFUSORES DIFFUSERS		
C40	65%	G860-0085
C41	85%	G860-0088 ●
C48	85%	G860-0100 ●
C53	75%	G860-0155 ●
TOPOS END CAPS		
E83 	AL	G812-2151

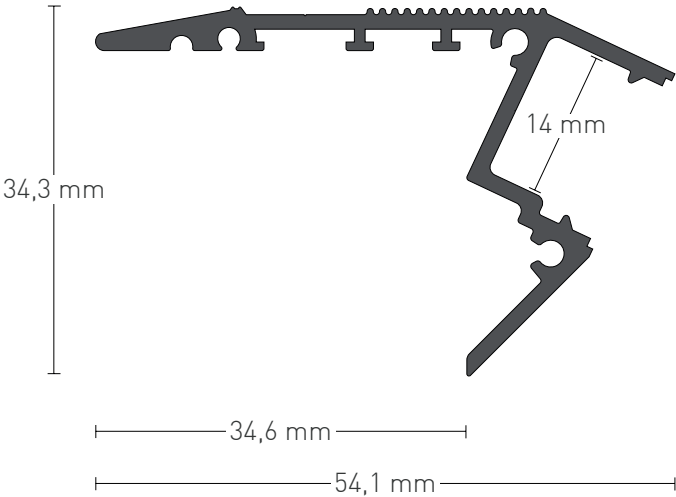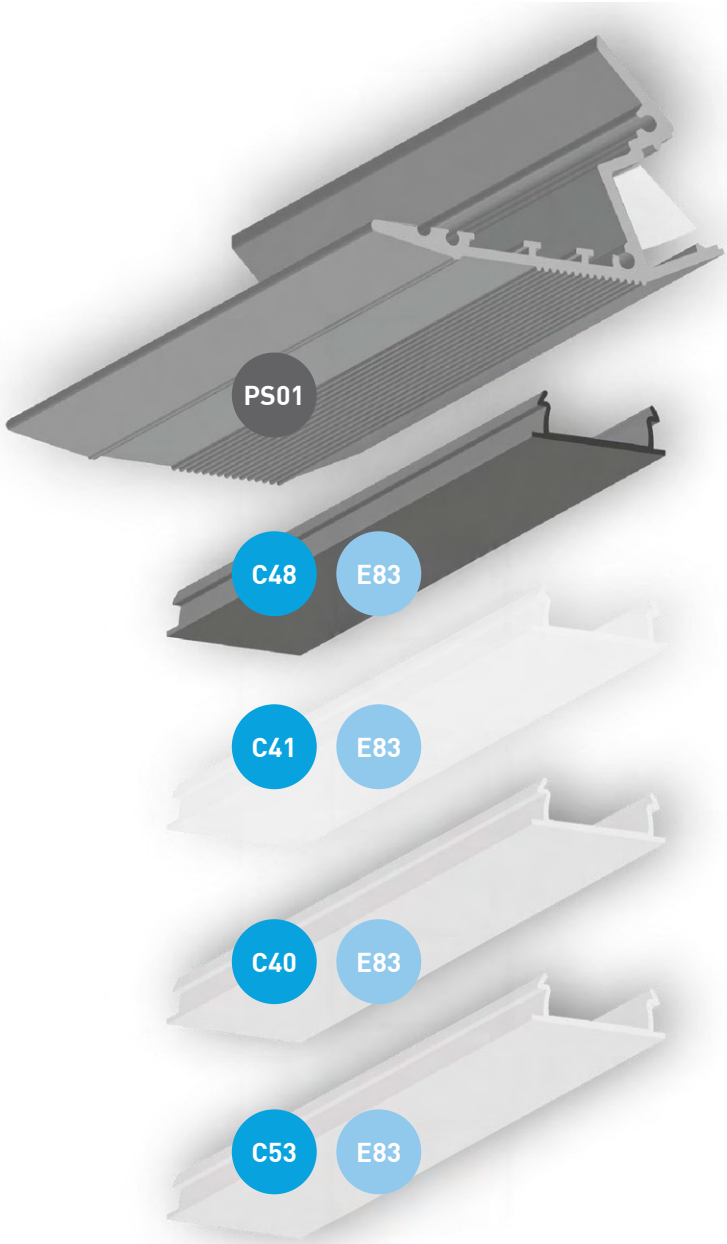

● Sob consulta | Under request

FONTES E CONTROLADORES | POWER SUPPLY AND CONTROLLERS





FONTES ALIMENTAÇÃO
POWER SUPPLY




IP20


CLASS I


3
YEARS
WARRANTY


CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	25 W	8011-2404
			60 W	8011-2419
			100 W	8011-2420
			150 W	8011-2421
			200 W	8011-2422
			250 W	8011-2423




IP20


CLASS II


5
YEARS
WARRANTY


CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	30 W	8011-2425
			60 W	8011-2426
			120 W	8011-2427
			180 W	8011-2428




IP20


CLASS II


5
YEARS
WARRANTY


CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	18 W	TD87500932
			35 W	TD87501054
			60 W	TD87501055
			100 W	TD87501056
			200 W	TD87501057




IP67


CLASS II


3
YEARS
WARRANTY


CE

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	ON/OFF	24V	36 W	8011-2437
			60 W	8011-2438
			100 W	8011-2439
			150 W	8011-2440



DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	DALI-2	24V	30 W	8011-2429
			60 W	8011-2430
			100 W	8011-2431
			150 W	8011-2432
			250 W	8011-2433



DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	DALI-2	24V	35 W	TD28001920
			60 W	TD28001921
			100 W	TD28001922
			150 W	TD28001923



DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	TRIAC	24V	36 W	8011-2434
			75 W	8011-2435
			150 W	8011-2436



FONTES ALIMENTAÇÃO
POWER SUPPLY





IP20



CLASS II



5 YEARS WARRANTY



CE



CASAMBI

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	BLUETOOTH (CASAMBI)	24V	35 W	TD28002677
			60 W	TD28002674
			100 W	TD28002675
			150 W	TD28002678





IP20



CLASS II



5 YEARS WARRANTY



CE



MATTER

DESCRIPTION	CONTROL	VOLTAGE	POWER	ORDER CODE
Fonte Alimentação Power Supply	MATTER	24V	35 W	TD28004489
			60 W	TD28004490
			100 W	TD28004491
			150 W	TD28004492





IP20



CLASS II



5 YEARS WARRANTY



CE

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Fonte Alimentação Power Supply	BLUETOOTH (TUYA)	24V	1	75 W	8011-2441
			2	100 W	8011-2442






DESCRIPTION	CONTROL	COMMISSIONING	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
sceneCOM S DALI-2	DALI-2	BLUETOOTH APP	4	28004922



DESCRIPTION	CURRENT	VOLTAGE	ORDER CODE
Fonte alimentação DALI-2 DALI-2 power supply	70mA	230VAC	8030-0873



DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
Módulo DALI-2 XC para botão de pressão DALI-2 XC module for Push-button	DALI-2	4	28002877

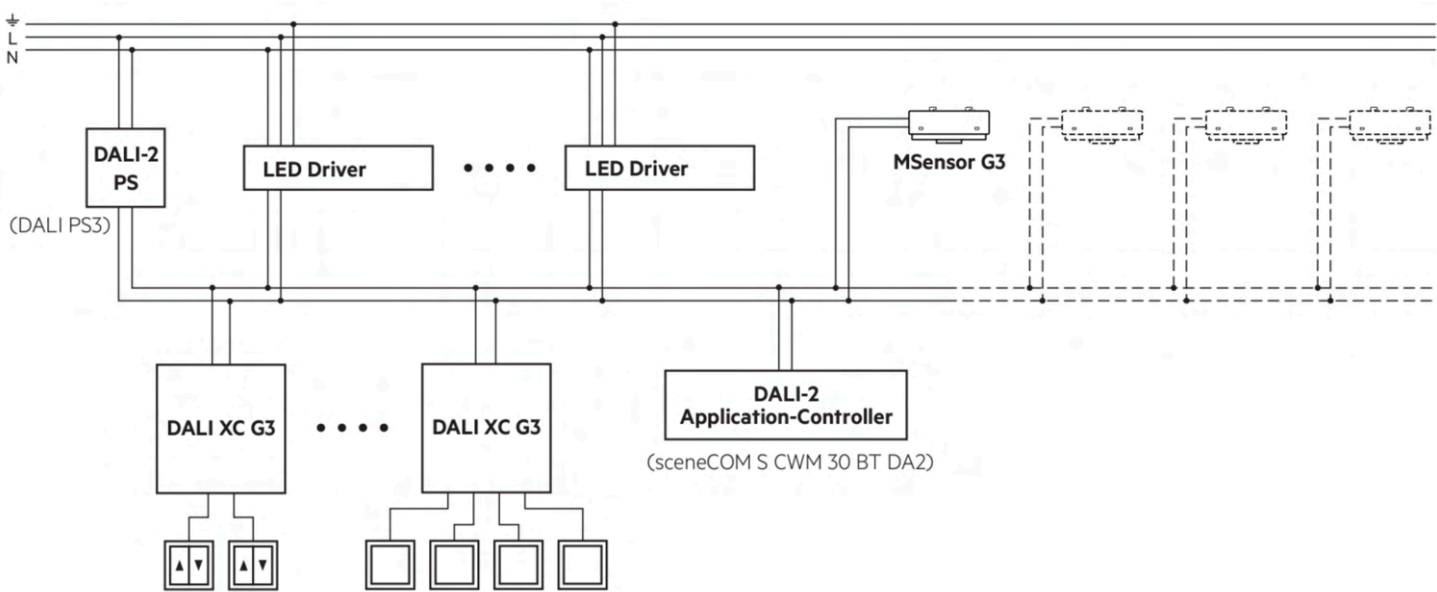

CONTROLADORES - CASAMBI
CONTROLLERS - CASAMBI



DESCRIPTION	CONTROL	MAXIMUM NUMBER DRIVERS CONNECTED	VOLTAGE	ORDER CODE
Módulo ativo CASAMBI Active module CASAMBI	BLUETOOTH (CASAMBI)	1 50	230VAC	CBU-ASD-LR CBU-DA-1P



DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	MAXIMUM NUMBER DRIVERS CONNECTED	VOLTAGE	ORDER CODE
Módulo Ativo Wireless basicDIM G2 TRIDONIC basicDIM Wireless Active module G2 TRIDONIC	BLUETOOTH (CASAMBI)	1	4	230VAC	28003540




DESCRIPTION	CONTROL	MAXIMUM DALI SENSOR CONNECTED	ORDER CODE
Módulo passivo CASAMBI Passive module CASAMBI	BLUETOOTH (CASAMBI)	1	CBU-DCS



DESCRIPTION	CONTROL	MAXIMUM PUSH-BUTTON CONNECTED	ORDER CODE
Módulo Passivo Wireless basicDIM G2 TRIDONIC basicDIM Wireless Passive module G2 TRIDONIC	BLUETOOTH (CASAMBI)	4	28003541



DESCRIPTION	CONTROL	ORDER CODE
Bluetooth sensor TRIDONIC	BLUETOOTH (CASAMBI)	8030-2801
Caixa saliente para sensor bluetooth Surface housing for bluetooth sensor	—	8030-2802

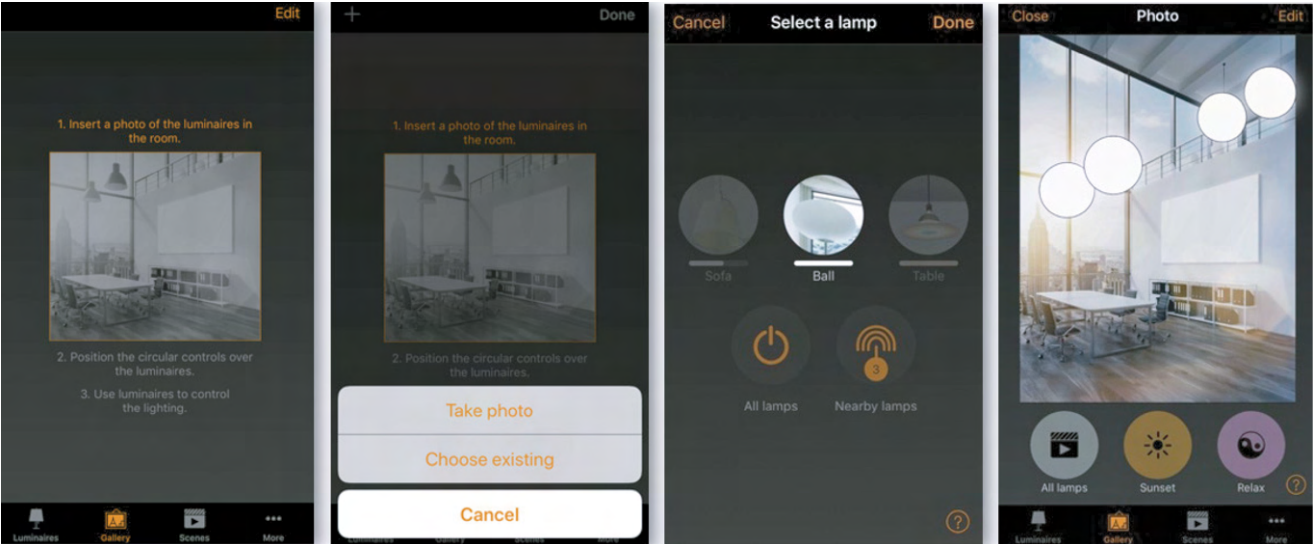

CONTROLADORES - CASAMBI
CONTROLLERS - CASAMBI





IP20

5 YEARS WARRANTY

CE

CASAMBI

DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Módulo CASAMBI para RGBW + Tunable White CASAMBI module for RGBW + Tunable White	BLUETOOTH (CASAMBI)	24V	4	144W	CBU-PWM4

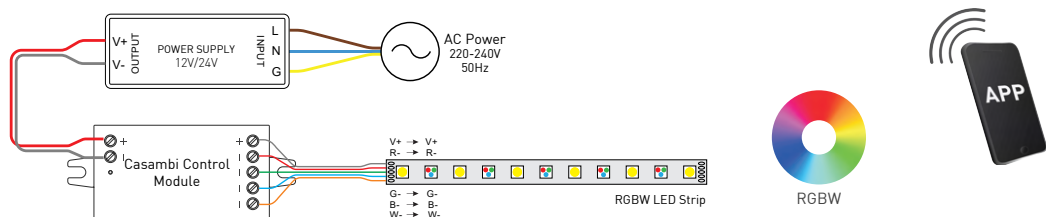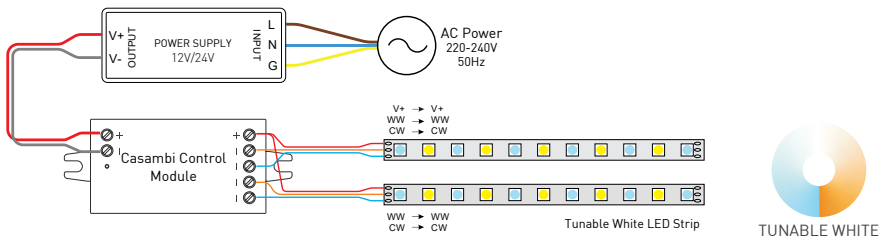


IP20

5 YEARS WARRANTY

CE

CASAMBI

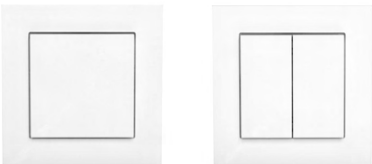

DESCRIPTION	CONTROL	ORDER CODE
Interruptor branco CASAMBI - 1 tecla CASAMBI White Switch - 1 way rocker	BLUETOOTH (CASAMBI)	1051W
Interruptor branco CASAMBI - 2 teclas CASAMBI White Switch - 2 way rocker		1052WN

IP20

5 YEARS WARRANTY

CE

CASAMBI



DESCRIPTION	CONTROL	ORDER CODE
Painel interface CASAMBI - preto CASAMBI user panel interface - black	BLUETOOTH (CASAMBI)	8030-2213
Painel interface CASAMBI - branco CASAMBI user panel interface - white		8030-2420



DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador RGBW + Comando RF (A) RGBW controller + RF remote control (A)	RF	24V	4	480W	8012-0100
Controlador RGBW + Comando RF (B) RGBW controller + RF remote control (B)					8012-0101



DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador TC + Comando RF CT controller + RF remote control	RF	24V	2	216W	8012-0102



DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Dimmer +Comando RF Dimmer controller + RF remote control	RF	24V	1	216W	8012-0103




DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Amplificador Amplifier	RF	24V	1	192W	8012-0104
			4	480W	8012-0105



CONTROLADORES - WI-FI
CONTROLLERS - WI-FI



DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Wi-Fi Wi-Fi controller	WI-FI / RF	24V	4	384W	8012-0106




DESCRIPTION	CONTROL	VOLTAGE	CHANNEL	POWER	ORDER CODE
Controlador Wi-Fi/RF Wi-Fi/ RF controller	RF	24V	4	480W	8012-0107






DESCRIPTION	CONTROL	ORDER CODE
Comando - Cor única Remote Controller- Single color	RF	8012-0108
Comando - RGB Remote Controller- RGB	WI-FI / RF	8012-0109



DESCRIPTION	CONTROL	ORDER CODE
Painel Touch - Cor única Touch Panel- Single color	RF	8012-0110
Painel Touch - RGBW Touch Panel- RGBW		8012-0111

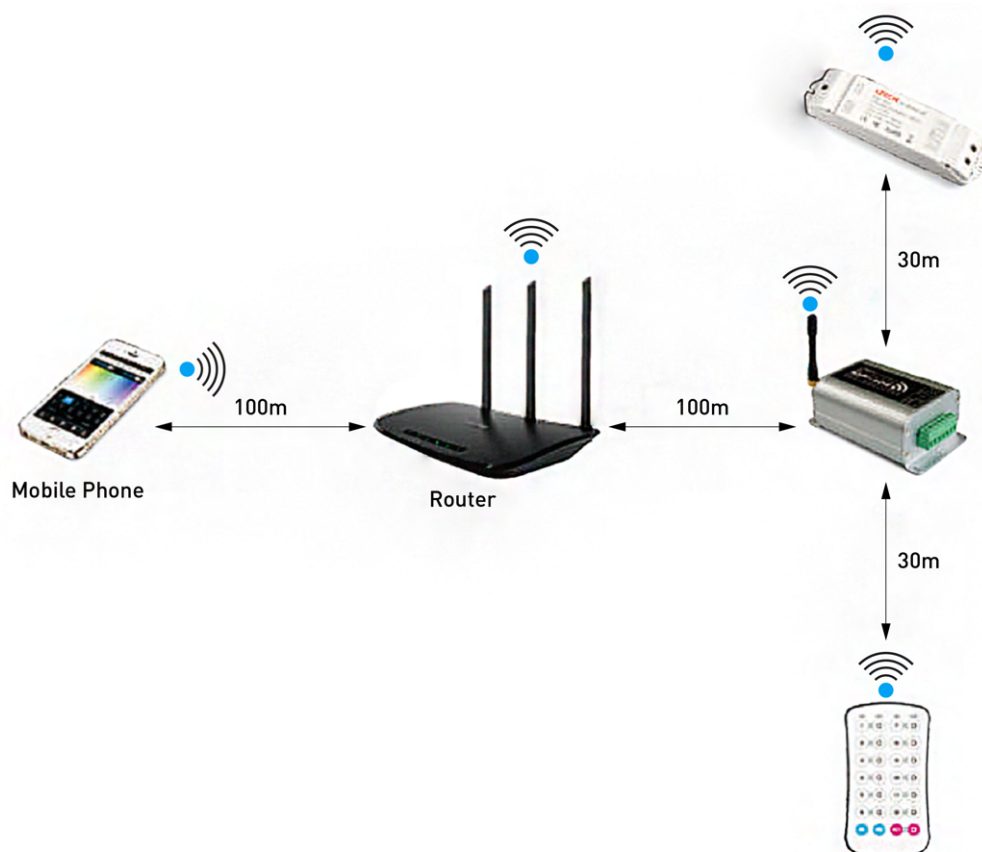

LUMINÁRIAS | LIGHTINGS





FOLLOW-ME EVO

FOLLOW-ME EVO

brilumen



1,5W

230V

IK04

LED



IP20



CLASS II



ISO
3864

EN 60598-2-22



24m

A FOLLOW ME EVO é uma luminária de indicação de saída de emergência com pictograma de leitura dupla face. Permite a instalação no teto de forma SALIENTE, ENCASTRADA, SUSPensa ou aplicada na PAREDE. O corpo é em alumínio com acabamento termolacado branco e o painel retroiluminado é em acrílico transparente, onde é aplicado o pictograma que sinaliza a saída.

A FOLLOW-ME EVO permite, na mesma luminária, definir o modo de funcionamento "permanente" ou "não permanente", no local da instalação. De base está configurada para "não permanente", mas basta ligar uma linha de fase no terminal "SL" (Switched Line) para a tornar "permanente". Isto proporciona conveniência e economia, eliminando a necessidade de encomendar luminárias diferentes para cada modo de operação.

FOLLOW-ME EVO is an emergency exit luminaire with a double-sided pictogram. Allows installation as SURFACE, RECESSED, SUSPENDED, or WALL MOUNTED. The body is made of aluminum with a white thermo lacquered finish, and the backlit panel is made of clear acrylic, where the exit signaling pictogram is applied.

FOLLOW ME EVO offers the possibility, within the same luminaire, to define a "maintained" or "non-maintained" operating mode at the installation site. By default, it is configured as "non-maintained," but simply connecting a phase line to "SL" (Switched Line) terminal makes it "maintained". This provides convenience and savings, eliminating the need to order different luminaires for each operating mode.



PERMANENTE | MAINTAINED

Ligada permanentemente. | Continuously ON.
Potência: 1,5W (no funcionamento normal ou de emergência). | Power: 1,5W (in normal or emergency operation).



NÃO PERMANENTE | NON-MAINTAINED

Ligada apenas em caso de falha de energia. | ON only in case of a power failure.
Potência: 0,5W em standby e 1,5W em modo de emergência. | Power: 0,5W in standby mode and 1,5W in emergency mode.



GENERAL INFORMATION

RATED LUMINOUS FLUX

110 lm

INPUT VOLTAGE

220-240 VAC

FREQUENCY

50/60 Hz

REMOTE CONTROL VOLTAGE RANGE

5-20 VDC

BATTERY TYPE

Li-ion 3.6V 2500mAh

DISCHARGING TIME

3h

VISIBILITY

24m

CHARGING TIME

8h

OPERATING TEMPERATURE

0°C ~ 40°C

BATTERY LIFETIME

1500 cycles

DIMENSIONS

284x215x35 mm

PICTOGRAMS



MATERIALS

LUMINÁRIA | FIXTURE

Alumínio | Aluminium

SINALIZAÇÃO | SIGNALLING

Acrílico | Acrylic

PCB - CEM-1 RETARDANTE DA CHAMA |
PCB - CEM-1 FLAME-RETARDANT



ILUMINAÇÃO DE EMERGÊNCIA
EMERGENCY LIGHTING




ORDER CODES	APPLICATION		TYPE	POWER	ORDER CODE
	#	Versão básica Basic Version*	Permanente ou Não Permanente Maintained or Not Maintained	1.5W or 0.5W	612.XX.PI
	A	Suspensão Suspended**			613.XX.PI
	B	Saliente Surface			614.XX.PI
	C	Encastrado Recessed			615.XX.PI
	D	Parede Bandeirola Wall Flag			616.XX.PI
	E	Colocação na parede Wall Mounted			617.XX.PI

* Kit de instalação não fornecido | No installation kit supplied
** Incluir o acessório para a aplicação no teto: saliente ou encastrado. | Please include the ceiling application: surface or recessed.

CONTROL TYPE		XX	PICTOGRAM		PI	ACCESSORIES SUSPENDED	
Modo de descanso Rest Mode	RM			0011		Saliente Surface	
				0012			50041020.TW 50041020.TB
Opção DALI DALI option	DL			0013		Encastrado Recessed	
				0014			
				0015			
				0016			
				0017			

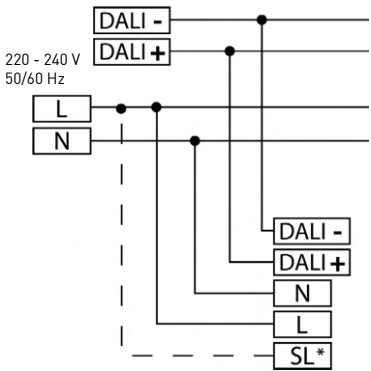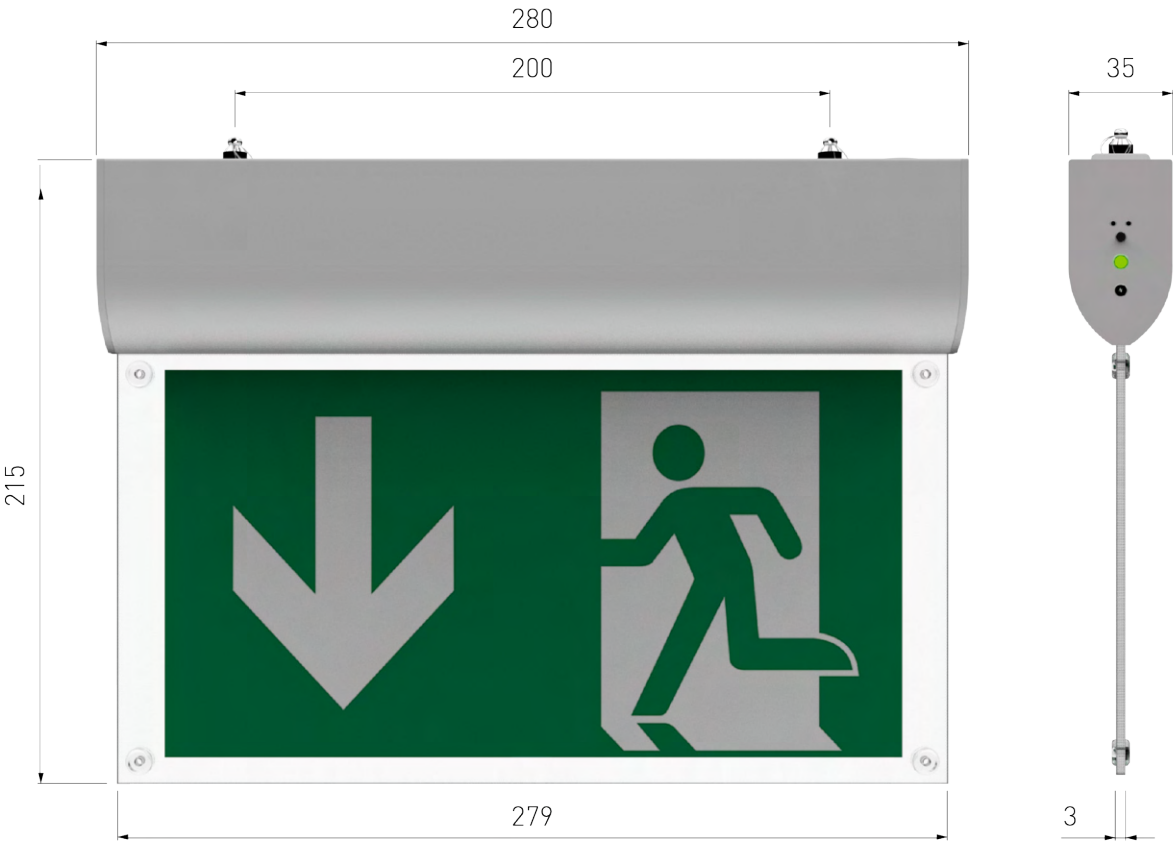

OPÇÃO DALI | DALI OPTION

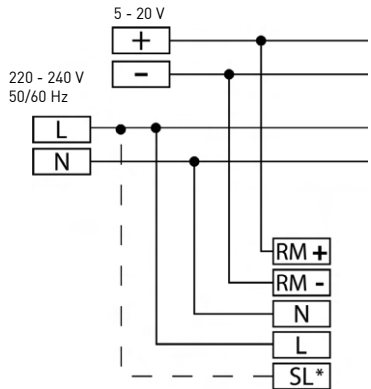

MODO DE DESCANSO | REST MODE

*Ligar uma linha de fase no terminal "SL" (Switched Line) para a tornar "Permanente" | *Connect a phase line to the "SL" (Switched Line) terminal to make it "Maintained".



SOFTIS

SOFTIS

brilumen



>80
CRI


230V

IK09




3
STEPS
MacAdam


50000h

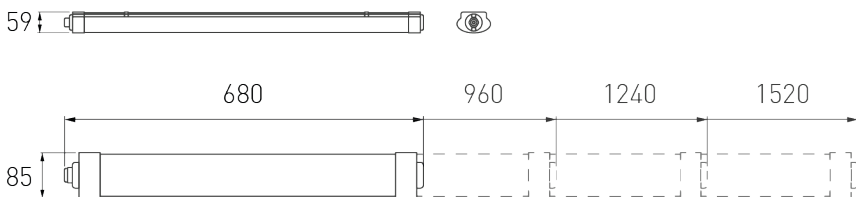

SURFACE



SUSPENDED

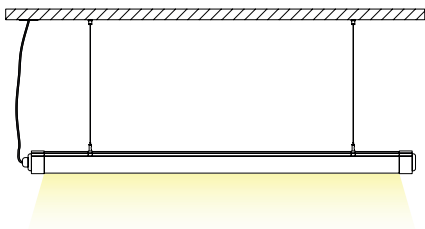

PT

A luminária SOFTIS apresenta uma elevada eficiência, até 211lm/W. Esta luminária é a solução ideal para iluminar áreas com grandes dimensões e propósitos muito diferentes, como estacionamento, áreas técnicas, áreas industriais, hipermercados, linhas de montagem e pavilhões desportivos.

EN

The SOFTIS is a highly efficient luminaire with up to 211lm/W. This luminaire is the ideal solution for lighting large areas with very different purposes, such as parking lots, technical areas, industrial areas, hypermarkets, assembly lines and sports halls.



Select your preferred option

Selecione a sua opção preferida
Sélectionnez votre option préférée

CONTROL TYPE	XX
ON/OFF	NF
DALI PUSH DIM	DA

SOFTIS CRI >80

LENGTH	POWER	CCT	LED LUMENS	LUMINAIRE LM	LED EFFICACY	INPUT CABLE	INPUT + OUTPUT CABLE
680 mm	13,3 W	3000k	2698 lm	2293 lm	202 lm/W	760XX.06.830	761XX.06.830
		4000k	2818 lm	2395 lm	211 lm/W	760XX.06.840	761XX.06.840
960 mm	20 W	3000k	4047 lm	3440 lm	202 lm/W	760XX.09.830	761XX.09.830
		4000k	4227 lm	3593 lm	211 lm/W	760XX.09.840	761XX.09.840
1240 mm	26,7 W	3000k	5396 lm	4587 lm	202 lm/W	760XX.12.830	761XX.12.830
		4000k	5636 lm	4791 lm	211 lm/W	760XX.12.840	761XX.12.840
1520 mm	33,4 W	3000k	6745 lm	5733 lm	202 lm/W	760XX.15.830	761XX.15.830
		4000k	7045 lm	5988 lm	211 lm/W	760XX.15.840	761XX.15.840

KIT EMERGÊNCIA | EMERGENCY KIT



Kit de Emergência Tridonic 150W 50-200VDC 1H 4 células
Tridonic emergency kit 150W 50-200VDC 1H 4 cells
6080-006



Kit de Emergência Tridonic 150W 50-200VDC 3H 4 células
Tridonic emergency kit 150W 50-200VDC 3H 4 cells
6080-007



KIT SUSPENSÃO | SUSPENSION KIT



80303017.SL 1,5m
80303018.SL 3m
80303019.SL 5m

ACABAMENTO | FINISHING



Silver Coated

FI

SL

TECHNICAL SPECIFICATIONS
ESPECIFICAÇÕES TÉCNICAS
SPÉCIFICATIONS TECHNIQUES



CORRIDOR FUNCTION



DALI PUSH DIM



DALI



ON.OFF



Cutting diameter

Diâmetro de corte / Diamètre de coupe



Color rendering index (CRI)


Índice de restituição cromática (CRI)

Indice de Reproduction Chromatique (CRI)



Beam angle

Ângulo de feixe / Angle de faisceau



Direction angle

Ângulo de oscilação / Angle d'oscillation



IP - Luminaire ingress protection rating

IP - Índice de estanqueidade e proteção da luminária

IP - Indice d'étanchéité et de protection



Unified Glare Rating .

Taxa de encandeamento / Taux d'éblouissement



Operating temperature

Temperatura de funcionamento

Température de fonctionnement

COLOUR FINISHES

CORES DE ACABAMENTO

COULEURS DE FINITION



Black . Preto / Noir



Textured Black . Preto texturado / Noir texturé



White . Branco / Blanc



Textured White Branco texturado / Blanc texturé



Anodized Aluminium

Alumínio anodizado / Aluminium anodisé



Brushed Aluminium

Alumínio escovado / Aluminium brossé



Brushed Steel

Aço escovado / Acier brossé



Textured Silver


Prateado texturado / Argent texturé



Technical drawing's measures presented in mm.

Medidas dos desenhos técnicos apresentadas em mm.

Dimensions des dessins techniques en mm



PF - Power factor


PF - Fator de potência / PF - Facteur de puissance



Time of continuous use

Número de horas de uso contínuo

Nombre d'heures d'utilisation continue



Electrical classes I, II, III.

Classes de isolamento I, II, III / Classes d'isolation I, II, III



LED type

Tipo de LED / Type de LED



IK - Impact Protection Rating

IK - Índice de Proteção contra Impactos Mecânicos

IK - Indice de protection contre les chocs mécaniques



European standards

Normas Europeias / Normes européennes



5 Years of Warranty

5 Anos de garantia/ 5 Années de garantie



3 Years of Warranty

3 Anos de garantia/ 3 Années de garantie



2 Years of Warranty

2 Anos de garantia/ 2 Années de garantie

COLOUR TEMPERATURE CCT

TEMPERATURAS DA COR DISPONÍVEIS CCT

TEMPÉRATURES DE COULEUR DISPONIBLES CCT



5000K | 5500K | 6000K | 6400K | 6500K



4000K | 4200K



2500K | 2700K | 3000K



Tunable White



RGBW



CE Marking

Marcação CE / Marquage CE



Restriction of certain hazardous substances

Restrição de certas substâncias perigosas normativa Europeia

Restriction de certaines substances dangereuses

Réglementations européennes



Recyclable. Do not put in trash

Reciclável. Não colocar no lixo comum

Recyclable. ne pas jeter à la poubelle



Choose LED, be environment friend

Escolha LED, proteja o meio ambiente

Choisissez la LED, protégez l'environnement



.....
BRILUMEN
PRODUTOS ELÉCTRICOS, LDA
Rua de Oliveira e Sá, nº 200
4475-263 Maia



.....
Tel. [+351] 220 920 550



.....
info@brilumen.com



.....
www.brilumen.com

Due to the constant technological evolution and to make available the most advanced solutions, Brilumen reserves the right to change data contained in this document without prior notice. The most up-to-date version of the products/features can be found on the website www.brilumen.com.

Devido à constante evolução tecnológica e com o objetivo de disponibilizar sempre as soluções mais avançadas, a Brilumen reserva-se no direito de alterar os dados constantes deste documento sem aviso prévio. A versão mais atualizada dos produtos/características poderá ser consultada no website www.brilumen.com.

En raison de l'évolution constante des technologies et afin de mettre à disposition les solutions les plus avancées, Brilumen se réserve le droit de modifier les données contenues dans le présent document sans préavis. La version la plus récente des produits/fonctionnalités est disponible sur le site internet www.brilumen.com.

